

Quickship Program



**Centrifugal Roof & Wall Exhausters • Centrifugal Filtered Supply
Propeller Roof Ventilators • Propeller Wall Fans • Recovery Ventilators
Utility Sets • Ceiling/Cabinet Fans • Gravity Ventilators
Inline Duct Fans • Upblast Restaurant Exhausters • Dampers, Shutters & Louvers**



Quick Delivery • Wide Product Selection • Competitive Price

Table of Contents

Ship Programs / Warranty	3
Centrifugal Roof & Wall Exhausters	
Model LPD Low Profile Direct Drive Roof/Sidewall Exhauster	4
Model SDB Downblast Belt Drive Roof Exhauster	5
Model DB Downblast Belt Drive Roof Exhauster	7
Model RED Downblast Direct Drive Roof Exhauster	9
Model STXD Upblast Direct Drive Roof Exhauster	11
Model STXB-UL762 Upblast Belt Drive (Restaurant Roof Exhauster)	13
Model TXB-UL762 Upblast Belt Drive (Restaurant Roof Exhauster)	15
Model CWD Direct Drive Sidewall Exhauster	17
Centrifugal Filtered Supply	
Model KSF Belt Drive Filtered Roof Supply Fan	19
Centrifugal Inline Fans	
Model SQB Square Inline Belt Drive Duct Fan	24
Model SQD Square Inline Direct Drive Duct Fan	27
Model CFD Belt Drive Forward Curved Inline Duct Blowers	29
Recovery Ventilators	
Model TRC Total Recovery for All Climates - Commercial Applications	37
Propeller Roof Ventilators	
Model ARE Dome Direct Drive Exhaust Roof Fan	41
Propeller Wall/Duct Fans	
Model CSTR Shutter Fans	43
Model GED Sidewall Direct Drive Propeller Exhaust Fan	44
Model LCE Sidewall Belt Drive Propeller Exhaust Fan	46
Model LCS Sidewall Belt Drive Propeller Supply Fan	48
Utility Vent Sets	
Model CM	50
Gravity Ventilators	
Model RCXII Gravity Relief/Intake Ventilator	63
Ceiling/Cabinet Fans	
Model FF/FFC Ceiling & Inline/Cabinet Fans	65
Models IF and HP Industrial Ceiling Fans	71
Dampers & Shutters	
Model 411 - Auto Exhaust Damper	72
Model 611 - Auto Exhaust Damper	74
Model 502 - Automatic Wall Shutter	76
Model 556 - Automatic Wall Shutter	78
Model EAS-RF - Automatic Wall Shutter	80
Model EAS-HDGS - Automatic Wall Shutter	82
Model FGS - Automatic Wall Shutter	84
Model 304SS - Automatic Wall Shutter	86
Model EASB & EASW - Automatic Wall Shutter	88
Model AMD - Extruded Aluminum Motorized Damper	90
Model GMD - Galvanized Motorized Damper	92
Model ACD - Aluminum Motorized Hat Channel Damper	94
Louvers	
Model AFL - Aluminum Fixed Louver	96
Model GFL - Galvaneal Steel Fixed Louver	98
Model DFL - Extruded Aluminum Drainable Blade Fixed Louver	100
Model ACL - Extruded Aluminum Combination Louver/Damper	102
Model ADL - Aluminum Door Louver	104
Model SDL - Steel Door Louver	105
Accessories	
Roof Curbs	106
Dampers For Roof Ventilators	106
Wall Shutters	108
Wall Housing Assembly	109
Models Cross Reference	110

Quickship Program

Shipping Schedules for each catalog item are shown with one of the following symbols. Please refer to your price list or contact your sales representative for specific product availability. Quantities per order are limited to stock on hand.

- = Next Day Shipment from Stock
- ▲ = 3 Day Shipment from Stock

◆ = 10 Day Build-to-Order Program

Freight Policy

Please refer to your price list for Freight Policy or contact your sales representative.

Shipping points may vary on occasion, but typically all products ship from Jacksonville, FL USA

Please check with your sales representative or our customer service team regarding shipment schedules & stock product availability, larger orders, additional accessories, special construction, technical support, application assistance, replacement parts, or any other service we can provide for you.

Limited Warranty

JencoFan (Manufacturer) 6393 Powers Avenue, Jacksonville, Florida 32217, warrants equipment of its manufacture to be free from defects in design, materials and workmanship (exclusive of abrasion, corrosion or erosion) as noted in Warranty Chart from the date of shipment to the original purchaser or the date of notification of readiness to ship. Motor warranty is noted in Warranty Chart. In order to claim the benefit of this warranty, buyer must notify manufacturer in writing of the claimed defect within ten (10) days after discovering it and return this equipment or parts to the manufacturer with transportation prepaid. In the event of on-site repair, no service technician will be dispatched until manufacturer receives your written purchase order. If any of the following conditions exist, the warranty will be null and void: **(1)** Buyer has permitted other persons not approved or authorized by manufacturer to alter, adjust, replace or repair the equipment or any part thereof. **(2)** Buyer has not followed instructions or other directions given in the contract documents or our maintenance manual. **(3)** When breakage or other loss or damage is the result of any negligence, misuse or fault on the part of any operator or other person not under our supervision or control. **(4)** The defect is the result of designs or drawings made, furnished or specified by others. **(5)** In the case of goods not manufactured but supplied by the manufacturer as part of a contract, manufacturer shall only be liable to the same extent that our supplier is to manufacturer, not to exceed any liability manufacturer would have for warranty on our own equipment. **(6)** Buyer has not paid in full invoices submitted to the buyer which are due for payment. **(7)** Unusual wear and tear of the equipment.

Statements relating to the product, its use or installation made prior to the execution of the agreement, are not warranties except to the extent that the contrary is expressly set forth herein. It is understood that such statements were not intended to, and did not, form a part of the agreement; they were merely made in the course of negotiations of the parties.

THIS WARRANTY IS IN LIEU OF ANY OTHER EXPRESSED OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

OUR SOLE AND EXCLUSIVE OBLIGATION UNDER THIS WARRANTY IS TO REPAIR OR REPLACE DEFECTIVE EQUIPMENT OR PARTS OR, AT OUR OPTION, TO PAY THE REASONABLE COST OF REPAIR OR REPLACEMENT. BUYER AGREES THAT NO OTHER REMEDY (INCLUDING, BUT NOT LIMITED TO, INCIDENTAL OR CONSEQUENTIAL DAMAGES, DAMAGE FOR LOST PROFITS OR SALES, OR DAMAGES FOR INJURIES TO PERSON OR PROPERTY) SHALL BE AVAILABLE. NOTWITHSTANDING THE ABOVE, THE TOTAL AMOUNT THAT MAY IN ANY EVENT BE PAYABLE IN SETTLEMENT OR LIABILITY, HOWEVER INCURRED, SHALL NOT EXCEED THE CONTRACT PRICE.

Warranty Chart (in years)		
Fan Model	Fan	Motor
LPD	5	3
RED	5	1
SDB	5	1
DB	5	1
STXB-RHUL	2	1
TXB-RHUL	2	1
STXD	5	1
STXD-RHUL	2	1
CWD	5	1
KSF	5	1
SQB	2	1
SQD	2	1
CFD	2	1
TRC	SEE PAGE 35	
CSTR	1	-
GED	5	1
LC	2	1
ARE/ARS	5	1
CM	5	1
CM-RHUL	2	1
RCXII	5	-
FF/FFC	1	1
IF/HP	1	-

MODEL LPD

LOW PROFILE DIRECT DRIVE CENTRIFUGAL ROOF/SIDEWALL EXHAUSTER



FEATURES

- Ultra low profile
- AMCA Air & Sound Licensed
- UL 705 listed
- UPS shipping carton
- 5 year housing warranty
- Up to 140°F airstream temperature
- Roof or sidewall mount

AMCA SEAL



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models LPD shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.




CONSTRUCTION

- Aluminum construction
- Stainless steel exterior fasteners
- Backward curved centrifugal wheel
- Aluminum birdscreen
- Conduit wiring chase
- Service disconnect switch
- Precision balanced to ISO Standard 1940

MOTOR

- Unique external rotor design
- Permanently lubricated bearings
- 3-year motor warranty
- Internal thermal protection
- 100% speed controllable
- Totally enclosed and continuous duty

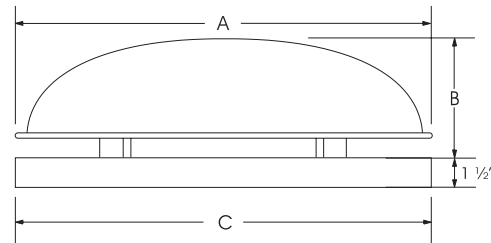

DIMENSIONAL DATA

MODEL LPD	O.D. DAMPER	ROOF OPENING	CURB O.D.	A	B	C	AVERAGE SHIP WT. LBS.
6	11	11-3/4	14-3/4	16-1/2	7	16-1/2	12
8	11	11-3/4	14-3/4	16-1/2	7	16-1/2	15

Ship Schedules:
• Next Day Shipment From Stock

ACCESSORIES

MODEL LPD	12" HIGH ROOF CURB	GRAVITY DAMPER	DAMPER MOTOR (LOOSE)	115 VOLT SPEED CONTROL
	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
6	611214 ●	411011 ●	411611 ●	2727.1 ●
8	611214 ●	411011 ●	411611 ●	2727.1 ●

PERFORMANCE DATA

MODEL LPD	CFM @ STATIC PRESSURE											RPM (NOM.)	MAX MOTOR WATTS & AMPS	SONES @ 1/2"	VENTILATOR WITH TE MOTOR
	0	1/8	1/4	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2	1 3/4				115/1/60 STOCK NO.
6	302	268	247	222	197	175	155	118	87	52	-	2800	90 WATTS 0.8 AMPS	7.2	LPD061AS ●
8	387	358	331	303	275	245	222	178	138	98	63	2775	115 WATTS 1.0 AMPS	11.9	LPD081AS ●

Performance certified is for installation type A-free inlet, free outlet. Performance ratings include the effects of birdscreen in the airstream. The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301. Installation Type A: free inlet hemispherical sone levels.

*Base unit=AMCA Seal for Sound Rating does not apply to units with speed control + RPM range capable with solid state speed control. Speed (RPM) shown is normal. Performance is based on actual speed of test.

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, JencOFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL SDB

DOWNBLAST BELT DRIVE

CENTRIFUGAL ROOF EXHAUSTER

NEW

CENTRIFUGAL ROOF & WALL EXHAUSTERS

APPLICATION

Model SDB belt drive units are used for the exhaust of relatively clean air from a wide range of commercial, industrial and institutional environments such as manufacturing and assembly plants, office buildings, schools, hospitals, restaurants, athletic facilities and many others.

The nonoverloading wheel with its higher static pressure capabilities makes this unit suitable for either ducted or nonducted applications. It's roof mounting permits location near the area to be ventilated, allowing short duct runs and more efficient operation.

The aluminum exterior provides an attractive appearance. Belt drive results in lower operating RPM and sound levels, making the Model DB well suited to applications where quiet operation is important. Belt drive also permits easy performance adjustments when needed to balance the total ventilation system.

CONSTRUCTION

Housing

- Heavy-gauge aluminum for extra strength with prepunched mounting holes.
- Neoprene isolators for reduction of vibration and sound.
- Cover easily removed for quick access to motor compartment.
- Water tight conduit tube for easy electrical connection.
- Aluminum birdscreen and disconnect are standard.
- Lifting lugs for easy and safe placement on roof.
- Stainless steel exterior fasteners.

Centrifugal Wheel

- All aluminum backward inclined wheel.
- Nonoverloading for safe operation in ducted systems.
- Dynamically balanced for smooth operation.

Drives

- Sized for minimum 150% of drive horsepower.
- Machined cast iron adjustable motor pulleys.
- Adjustable base for belt tensioning.
- Nonstatic oil resistant v-belts.

DIMENSIONAL DATA

MODEL SDB	A	B	C	D	ROOF OPENING	Average Ship Wt. Lbs.
6	18 1/8	29 7/8	27 5/8	2 5/8	13 1/2	109
7	18 1/8	29 7/8	27 5/8	2 5/8	13 1/2	109
8	18 1/8	29 7/8	27 5/8	2 5/8	13 1/2	109
10	18 1/8	29 7/8	27 5/8	2 5/8	13 1/2	109
12	20 1/8	31 5/8	30 1/4	3	15 1/2	122
14	20 1/8	31 5/8	30 1/4	3	15 1/2	126
15	24 1/8	32 1/4	35 1/2	3 1/4	19 1/2	140
16	24 1/8	32 1/4	35 1/2	3 1/4	19 1/2	140

ACCESSORIES

MODEL SDB	RECOMMENDED 12" HIGH MOUNTING CURB		RECOMMENDED GRAVITY DAMPER		DAMPER MOTOR (LOOSE)		AUTOMATIC BELT TENSIONER (INSTALLED)	
	OD	STOCK NO.	OD	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
6	16 1/2	711216 ●	12	411012 ●	411611 ●	100069 ●		
7	16 1/2	711216 ●	12	411012 ●	411611 ●	100069 ●		
8	16 1/2	711216 ●	12	411012 ●	411611 ●	100069 ●		
10	16 1/2	711216 ●	12	411012 ●	411611 ●	100069 ●		
12	18 1/2	711218 ●	14	411014 ●	411611 ●	100070 ●		
14	18 1/2	711218 ●	14	411014 ●	411611 ●	100070 ●		
15	22 1/2	711222 ●	18	411018 ●	411611 ●	100070 ●		
16	22 1/2	711222 ●	18	411018 ●	411611 ●	100070 ●		



Motors

- Single speed open drip-proof are standard.
- All motors are rated for continuous duty.
- 182T and larger motors shipped unmounted for field installation.
- Disconnect switch standard with single speed drip-proof motors.

Bearings

- Heavy-duty ball bearing type.
- Prelubricated and permanently sealed.


AMCA SEAL



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models SDB shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



LISTED POWER ROOF VENTILATOR
UL STANDARD 705

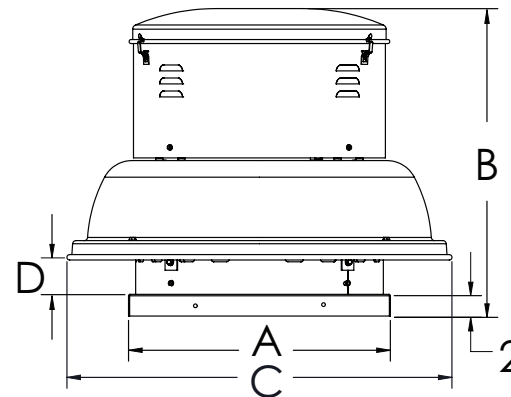

Ship Schedules:

- Next Day Shipment From Stock
- ▲ 3 Day Shipment From Stock
- ◆ 10 Day Shipment

Curb Cap adaptors are available to match old style DB and competitors curb caps. Refer to Optimizer2 for sizes available on Quickship.

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, JencOFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

CENTRIFUGAL ROOF & WALL EXHAUSTERS

MODEL SDB		Downblast Belt Drive Centrifugal Roof Exhauster														Ventilator with Open Drip-proof Motor and Drive Assembly	
Model SDB	Motor Hp	Max. BHP	RPM	Sones @ 1/4 SP	CFM at Static Pressure											115/1/60*	208-230-460/3/60
					0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	1-1/4	1-1/2	Stock No.	Stock No.
6	1/4	0.11	1,600	8.2	300	275	246	215	176	109	-	-	-	-	-	SDB06ML1S ●	SDB06ML3S ▲
	1/4	0.15	1,800	9.7	337	315	291	265	235	201	144	80	-	-	-	SDB06MM1S ●	SDB06MM3S ▲
	1/4	0.21	2,000	11.4	375	355	335	310	288	260	229	184	-	-	-	SDB06MH1S ●	SDB06MH3S ▲
7	1/4	0.11	1,600	8.5	438	388	336	277	204	119	-	-	-	-	-	SDB07ML1S ●	SDB07ML3S ▲
	1/4	0.16	1,800	10.2	493	449	402	356	300	234	158	-	-	-	-	SDB07MM1S ●	SDB07MM3S ▲
	1/4	0.21	2,000	11.9	547	507	466	425	381	330	272	202	-	-	-	SDB07MH1S ●	SDB07MH3S ▲
8	1/4	0.13	1,550	9.1	835	775	716	648	565	402	-	-	-	-	-	SDB08ML1S ●	SDB08ML3S ▲
	1/4	0.19	1,750	11.1	943	888	838	782	720	646	535	-	-	-	-	SDB08MM1S ●	SDB08MM3S ▲
	1/4	0.26	1,950	13.2	1051	1001	956	909	857	800	733	652	-	-	-	SDB08MH1S ●	SDB08MH3S ▲
	1/3	0.33	2,100	15.0	1132	1085	1043	1000	954	905	850	787	712	-	-	SDB08PH1S ●	SDB08PH3S ▲
10	1/4	0.19	1,450	10.8	1213	1148	1077	997	906	796	640	-	-	-	-	SDB10ML1S ●	SDB10ML3S ▲
	1/4	0.26	1,600	12.8	1339	1280	1217	1148	1073	988	888	768	-	-	-	SDB10MH1S ●	SDB10MH3S ▲
	1/3	0.34	1,750	14.8	1464	1411	1355	1294	1228	1158	1079	989	888	-	-	SDB10PH1S ●	SDB10PH3S ▲
12	1/4	0.25	1,400	11.1	1540	1459	1378	1277	1170	1053	913	-	-	-	-	SDB12MH1S ●	SDB12MH3S ▲
	1/3	0.34	1,550	13.2	1705	1632	1560	1477	1383	1286	1181	1057	885	-	-	SDB12PH1S ●	SDB12PH3S ▲
	1/2	0.49	1,750	16.0	1925	1860	1797	1731	1653	1569	1483	1396	1296	1042	-	SDB12QH1S ●	SDB12QH3S ●
14	1/4	0.27	1,100	10.0	2216	2081	1946	1787	1604	1324	-	-	-	-	-	SDB14MH1S ●	SDB14MH3S ▲
	1/3	0.5	1,200	11.8	2417	2293	2172	2038	1878	1702	1427	-	-	-	-	SDB14PH1S ●	SDB14PH3S ▲
	1/2	0.55	1,400	15.9	2820	2714	2610	2504	2388	2255	2114	1950	1714	-	-	SDB14QH1S ●	SDB14QH3S ●
	3/4	0.75	1,550	19.0	3122	3026	2931	2838	2739	2633	2512	2385	2252	1846	-	SDB14RH1S ●	SDB14RH3S ●
	1	1.08	1,750	23.0	3525	3440	3355	3273	3189	3102	3009	2908	2797	2568	2247	SDB14SH1S ●	SDB14SH3S ●
15	1/4	0.26	1,000	10.0	2327	2197	2037	1870	1687	1393	-	-	-	-	-	SDB15MH1S ●	SDB15MH3S ▲
	1/3	0.35	1,100	11.7	2560	2445	2301	2156	1996	1823	1553	-	-	-	-	SDB15PH1S ●	SDB15PH3S ▲
	1/2	0.51	1,250	14.4	2909	2811	2691	2562	2434	2292	2149	1965	-	-	-	SDB15QH1S ●	SDB15QH3S ●
	3/4	0.8	1,450	18.8	3375	3292	3196	3087	2976	2866	2749	2624	2502	2150	-	SDB15RH1S ●	SDB15RH3S ●
	1	1.07	1,600	22.0	3724	3650	3567	3472	3370	3271	3172	3067	2956	2729	2412	SDB15SH1S ●	SDB15SH3S ●
16	1/4	0.26	900	9.1	2566	2403	2219	2015	1739	-	-	-	-	-	-	SDB16MH1S ●	SDB16MH3S ▲
	1/3	0.36	1,000	11.1	2851	2707	2544	2373	2174	1915	-	-	-	-	-	SDB16PH1S ●	SDB16PH3S ●
	1/2	0.54	1,150	14.0	3279	3156	3019	2874	2724	2557	2345	2095	-	-	-	SDB16QH1S ●	SDB16QH3S ●
	3/4	0.78	1,300	17.6	3707	3599	3482	3356	3228	3094	2952	2782	2585	-	-	SDB16RH1S ●	SDB16RH3S ●
	1	1.08	1,450	22.0	4135	4038	3936	3827	3713	3597	3478	3354	3216	2875	2467	SDB16SH1S ●	SDB16SH3S ●

Power ratings (BHP) do not include transmission losses.
 Performance certified is for installation type A-free inlet, free outlet. Performance ratings include the effects of birdscreen in the airstream.
 The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301.
 Installation Type A: free inlet hemispherical sone levels.
 *Tri-voltage (115-208-230) is standard on 3/4 through 1 1/2 Hp Single phase motors. Tri-voltage is available for the 1/2 Hp motors. Inquire for price and delivery.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL DB

DOWNBLAST BELT DRIVE

CENTRIFUGAL ROOF EXHAUSTER

APPLICATION

Model DB belt drive units are used for the exhaust of relatively clean air from a wide range of commercial, industrial and institutional environments such as manufacturing and assembly plants, office buildings, schools, hospitals, restaurants, athletic facilities and many others.

The nonoverloading wheel with its higher static pressure capabilities makes this unit suitable for either ducted or nonducted applications. It's roof mounting permits location near the area to be ventilated, allowing short duct runs and more efficient operation.

The aluminum exterior provides an attractive appearance. Belt drive results in lower operating RPM and sound levels, making the Model DB well suited to applications where quiet operation is important. Belt drive also permits easy performance adjustments when needed to balance the total ventilation system.

CONSTRUCTION

Housing

- Heavy-gauge aluminum for extra strength with prepunched mounting holes.
- Neoprene isolators for reduction of vibration and sound.
- Cover easily removed for quick access to motor compartment.
- Water tight conduit tube for easy electrical connection.
- Aluminum birdscreen and disconnect are standard.
- Stainless steel exterior fasteners.

Centrifugal Wheel

- All aluminum backward inclined wheel.
- Nonoverloading for safe operation in ducted systems.
- Statically and dynamically balanced for smooth operation.

Drives

- Sized for minimum 150% of drive horsepower.
- Machined cast iron adjustable motor pulleys.
- Adjustable base for belt tensioning.
- Nonstatic oil resistant v-belts.



Motors

- Single speed open drip-proof are standard.
- All motors are rated for continuous duty.
- 182T and larger motors shipped unmounted for field installation.
- Disconnect switch standard with single speed drip-proof motors.

Bearings

- Heavy-duty ball bearing type.
- Prelubricated and permanently sealed.

AMCA SEAL




JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models DB shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



LISTED POWER
ROOF VENTILATOR
UL STANDARD 705

DIMENSIONAL DATA

MODEL DB	A	B	C	D	E	F	ROOF OPENING	Average Ship Wt. Lbs.
18	32 1/2	24	29 1/2	4 1/2	26 1/4	2 1/2	24 3/4	160
20	36 3/4	25	29 1/2	4 1/2	26 1/4	2 1/2	24 3/4	215
24	41 1/4	26 1/2	35 3/4	8 1/2	30	2 1/2	30 3/4	290
30	58 3/8	37	42 1/2	5 1/2	41	2 1/2	37 3/4	465
36	58 3/8	37	42 1/2	10	41	2 1/2	37 3/4	475

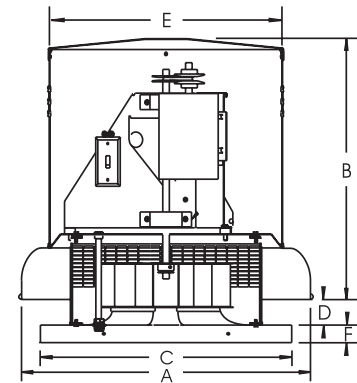

ACCESSORIES

MODEL DB	RECOMMENDED 12" HIGH MOUNTING CURB		RECOMMENDED GRAVITY DAMPER		DAMPER MOTOR (LOOSE)	AUTOMATIC BELT TENSIONER (INSTALLED)
	OD	STOCK NO.	OD	STOCK NO.	STOCK NO.	STOCK NO.
18	27 3/4	611227 ●	24	411024 ●	411611 ●	100070 ●
20	27 3/4	611227 ●	24	411024 ●	411611 ●	100070 ●
24	33 3/4	611233 ●	30	411030 ●	411611 ●	100072 ●
30	40 3/4	611240 ◆	36	611036 ◆	411611 ◆	N/A
36	40 3/4	611240 ◆	36	611036 ◆	411611 ◆	N/A

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
◆ 10 Day Shipment

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL DB					Downblast Belt Drive Centrifugal Roof Exhauster									Ventilator with Open Drip-proof Motor and Drive Assembly	
Model DB	Motor Hp	Max. BHp	RPM	Sones @ 1/4 SP	CFM at Static Pressure									115/1/60*	208-230-460/3/60
					0	1/8	1/4	3/8	1/2	5/8	3/4	1	1 1/4	Stock No.	Stock No.
18	1/3	0.33	805	10.8	3056	2838	2579	2274	1873	-	-	-	-	DB18PH1S ●	DB18PH3S ▲
	1/2	0.52	940	14.0	3568	3385	3183	2944	2681	2358	1965	-	-	DB18QH1S ●	DB18QH3S ●
	3/4	0.78	1075	17.8	4080	3922	3752	3563	3351	3123	2863	2167	-	DB18RH1S ●	DB18RH3S ●
	1	0.99	1165	21.0	4422	4276	4123	3957	3770	3570	3356	2824	-	DB18SH1S ●	DB18SH3S ●
	1 1/2	1.52	1345	26.0	5105	4979	4849	4713	4569	4408	4237	3873	3434	DB18TH1S ●	DB18TH3S ●
	2	2.02	1480	31.0	5618	5504	5386	5265	5139	5005	4859	4546	4206	DB18VH1S ▲	DB18VH3S ●
20	1/3	0.35	665	8.7	3562	3318	3021	2658	2145	1281	-	-	-	DB20PH1S ●	DB20PH3S ◆
	1/2	0.52	760	10.7	4071	3861	3625	3338	3007	2567	1963	-	-	DB20QH1S ●	DB20QH3S ●
	3/4	0.79	875	13.9	4687	4506	4312	4091	3838	3560	3210	2229	-	DB20RH1S ●	DB20RH3S ●
	1	1.12	985	17.5	5276	5117	4949	4768	4562	4336	4098	3476	2589	DB20SH1S ●	DB20SH3S ●
	1 1/2	1.56	1100	22.0	5892	5750	5602	5447	5280	5092	4889	4451	3874	DB20TH1S ●	DB20TH3S ●
	2	2.08	1210	26.0	6482	6353	6220	6082	5937	5782	5610	5241	4821	DB20VH1S ◆	DB20VH3S ●
24	1/3	0.33	490	8.6	4879	4400	3751	2388	-	-	-	-	-	DB24PH1S ●	DB24PH3S ◆
	1/2	0.49	560	11.5	5576	5169	4688	3972	2614	-	-	-	-	DB24QH1S ●	DB24QH3S ●
	3/4	0.75	645	14.3	6422	6078	5683	5219	4557	3374	1906	-	-	DB24RH1S ●	DB24RH3S ●
	1	1.00	710	17.2	7069	6761	6412	6033	5549	4848	3773	-	-	DB24SH1S ●	DB24SH3S ●
	1 1/2	1.54	820	22.0	8164	7902	7613	7299	6968	6567	6073	4360	-	DB24TH1S ●	DB24TH3S ●
	2	2.04	900	26.0	8961	8723	8467	8190	7899	7590	7218	6180	4490	DB24VH1S ◆	DB24VH3S ◆
30	1/2	0.52	410	6.6	7098	6406	5512	4350	2246	-	-	-	-	DB30QH1S ◆	DB30QH3S ◆
	3/4	0.76	465	7.7	8050	7456	6735	5866	4743	2961	-	-	-	DB30RH1S ◆	DB30RH3S ◆
	1	1.03	515	8.7	8916	8388	7775	7074	6215	5132	3571	-	-	DB30SH1S ◆	DB30SH3S ◆
	1 1/2	1.55	590	10.6	10214	9761	9257	8683	8030	7315	6472	3860	-	DB30TH1S ◆	DB30TH3S ◆
	2	2.13	655	13.1	11339	10936	10496	10010	9469	8871	8231	6617	4024	DB30VH1S ◆	DB30VH3S ◆
	3	3.13	745	16.7	12897	12546	12171	11768	11332	10857	10343	9220	7827	N/A	DB30WH3S ◆
36	3/4	0.80	355	9.1	10134	9166	7936	5730	-	-	-	-	-	DB36RH1S ◆	DB36RH3S ◆
	1	1.02	385	10.3	10990	10122	9075	7268	5137	-	-	-	-	DB36SH1S ◆	DB36SH3S ◆
	1 1/2	1.58	445	13.0	12703	11985	11118	10124	8417	6731	-	-	-	DB36TH1S ◆	DB36TH3S ◆
	2	2.11	490	15.7	13987	13351	12574	11770	10712	8982	7516	-	-	DB36VH1S ◆	DB36VH3S ◆
	3	3.15	560	20.0	15986	15445	14803	14106	13387	12494	11151	8338	-	N/A	DB36WH3S ◆
	5	5.16	660	27.0	18840	18393	17884	17315	16722	16130	15470	13586	11030	N/A	DB36XH3S ◆

Power ratings (BHP) do not include transmission losses.
 Performance certified is for installation type A-free inlet, free outlet. Performance ratings include the effects of birdscreen in the airstream.
 The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301.
 Installation Type A: free inlet hemispherical sone levels.
 *Tri-voltage (115-208-230) is standard on 3/4 through 1 1/2 Hp Single phase motors. Tri-voltage is available for the 1/2 Hp motors. Inquire for price and delivery.

MODEL RED

DOWNBLAST DIRECT DRIVE CENTRIFUGAL ROOF EXHAUSTER

APPLICATION

Model RED direct drive units are used to exhaust air from all types of commercial and institutional buildings such as hospitals and health care facilities, schools, recreational buildings, machinery and equipment rooms, offices, retail stores and similar applications.

The nonoverloading wheel with its higher static pressure capability makes this unit suitable for either ducted or nonducted applications. It's roof mounting permits location near the area to be ventilated, allowing short duct runs and more efficient operation.

The spun aluminum exterior provides an attractive appearance and is compatible with belt driven Model DB and companion gravity units to make up a complete ventilation system. Direct drive units use smaller diameter wheels, resulting in low sound levels and quiet operation. They have no belts or fan bearings to maintain or adjust and consequently require very little maintenance.

CONSTRUCTION

Housing

- Curb cap has prepunched mounting holes for ease of installation.
- Fan plate isolates motor compartment from contaminated exhaust air.
- Spun aluminum hood and skirt for weather protection and attractive appearance.
- Heavy-gauge motor support for rigidity and strength
- Neoprene isolators for reduction of vibration and sound.
- Quick access to motor compartment for ease of maintenance.
- Conduit passage for easy electrical connection from below roof.
- Aluminum birdscreen and disconnect are included on standard models.

Centrifugal Wheel

- Non overloading for safe operation in ducted systems.
- Backward inclined wheels constructed of noncorrosive aluminum.
- Statically and dynamically balanced for smooth operation.

Speed Controllable Motors

- Standard motors are single speed, speed controllable and drip-proof.
- All motors are rated for continuous duty.
- Disconnect is standard with single speed drip-proof motors.
- Motors ship mounted as standard.


DIMENSIONAL DATA

MODEL RED	A	B	C	D	ROOF OPENING	Average Ship Wt. Lbs.
6	21 3/4	12	16 1/2	1 3/4	11 3/4	50
8	21 3/4	15 3/4	16 1/2	1 3/4	11 3/4	50
10	21 3/4	17 1/4	16 1/2	1 3/4	11 3/4	50
12	33 1/8	23 1/2	24	2	19 1/4	120
15	33 1/8	23 1/2	24	2	19 1/4	124

ACCESSORIES

MODEL RED	RECOMMENDED 12" HIGH MOUNTING CURB		RECOMMENDED GRAVITY DAMPER		DAMPER MOTOR (LOOSE)	115 VOLT SPEED CONTROL		230 VOLT SPEED CONTROL
	OD	STOCK NO.	OD	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
6	14 3/4	611214 ●	11	411011 ●	411611 ●	2727.1 ●	N/A	3232.1 ♦
8	14 3/4	611214 ●	11	411011 ●	411611 ●	2727.1 ●	N/A	3232.1 ♦
10	14 3/4	611214 ●	11	411011 ●	411611 ●	2727.1 ●	N/A	3232.1 ♦
12	22 1/4	611222 ●	18	411018 ●	411611 ●	2727.1 ●	2828.1 ●	3232.1 ♦
15	22 1/4	611222 ●	18	411018 ●	411611 ●	N/A	2828.1 ●	3232.1 ♦

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
♦ 10 Day Shipment

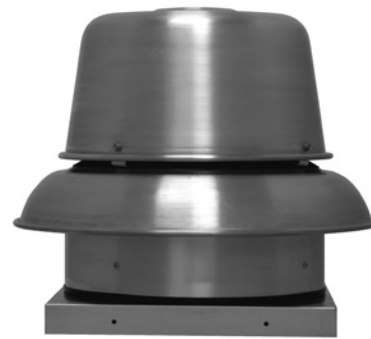

AMCA SEAL



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models RED shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



LISTED POWER ROOF VENTILATOR
UL STANDARD 705


SPEED CONTROL

Solid State Speed Control:

Control is matched to the motor and blower wheel to allow continuous reduction in performance allowing adjustments of airflow for system balancing. CFM is reduced in direct proportion to motor speed reduction. Speed control is only available for single phase. Exhauster performance can be controlled from the ventilated area.

2727.1 MAX 1/3 HP-5 AMP 120V

2828.1 MAX 1/2 HP-10 AMP 120V

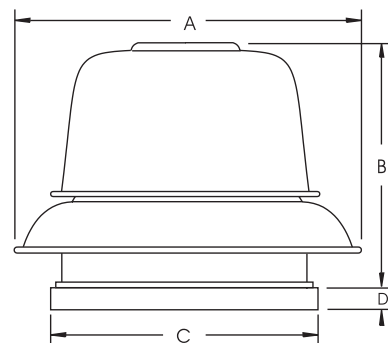

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

CENTRIFUGAL ROOF & WALL EXHAUSTERS

MODEL RED					Downblast Direct Drive Centrifugal Roof Exhauster									Ventilator with Open Drip-proof Motor	
Model RED	Motor Hp	Max. BHP	RPM	Sones @ 1/8 SP	CFM at Static Pressure									115/1/60	208-230/1/60
					0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	Stock No.	Stock No.
6	1/10	0.05	1650	8.0	390	347	295	232	134	-	-	-	-	RED06JH1AS ●	RED06JH1CS ♦
8	1/25	0.04	1050	4.5	573	468	326	-	-	-	-	-	-	RED08HM1AS ●	N/A
	1/10	0.12	1550	9.5	845	781	705	622	523	398	251	-	-	RED08JH1AS ●	RED08JH1CS ♦
10	1/4	0.27	1600	12.4	1436	1348	1256	1155	1041	910	766	604	412	RED10MH1AS ●	RED10MH1CS ♦
12	1/4	0.15	1150	8.9	1545	1356	1144	952	769	558	-	-	-	RED12MM1AS ●	RED12MM1CS ♦
	1/2	0.52	1750	18.3	2352	2226	2104	1973	1832	1689	1562	1443	1324	RED12QH1AS ●	RED12QH1CS ♦
15	1/2	0.46	1150	13.7	3003	2779	2540	2285	2038	1774	1480	1180	840	RED15QM1AS ●	RED15QM1CS ♦

Speed (RPM) shown is nominal. Performance is based on actual speed of test.

Performance certified is for installation type A-free inlet, free outlet.

Performance ratings include the effects of birdscreen in the airstream.

The sound ratings shown are the loudness values in the fan sones @ 5' (1.5m) in an hemispherical free field calculated per AMCA Standard 301.

Installation Type A: free inlet hemispherical sone levels.

Performance Data at Reduced Speed														
Model RED	Motor HP	Max. BHP	RPM	Sones @ 1/8 SP	CFM at Static Pressure									
					0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	
6-1550	1/10	0.02	950	2.4	224	133	-	-	-	-	-	-	-	-
		0.02	1100	3.5	260	187	-	-	-	-	-	-	-	-
		0.03	1250	4.6	295	234	146	-	-	-	-	-	-	-
		0.04	1450	6.2	343	293	229	131	-	-	-	-	-	-
8-1050	1/25	0.02	750	1.8	409	238	-	-	-	-	-	-	-	
8-1550	1/10	0.05	1150	5.5	627	535	417	249	-	-	-	-	-	
		0.10	1450	8.4	791	721	638	545	425	276	-	-	-	
10-1625	1/4	0.06	900	4.2	808	640	403	-	-	-	-	-	-	
		0.09	1100	6.3	987	856	696	489	-	-	-	-	-	
		0.15	1300	8.5	1167	1058	936	790	615	405	-	-	-	
		0.22	1500	11.0	1346	1253	1152	1042	910	762	594	393	-	
12-1075	1/4	0.08	900	5.8	1209	959	708	456	-	-	-	-	-	
		0.12	1050	7.6	1411	1202	970	771	553	-	-	-	-	
12-1625	1/2	0.17	1200	9.6	1613	1432	1231	1040	866	678	442	-	-	
		0.24	1350	11.8	1814	1653	1484	1299	1139	984	821	633	376	
		0.36	1550	14.9	2083	1942	1801	1645	1484	1344	1210	1073	929	
15-1140	1/2	0.14	750	6.3	1958	1599	1212	759	-	-	-	-	-	
		0.19	850	7.9	2219	1907	1567	1203	795	-	-	-	-	
		0.27	950	9.7	2481	2202	1902	1602	1256	887	-	-	-	
		0.36	1050	11.5	2742	2493	2228	1950	1672	1352	1019	621	-	

Model in reduced speed table indicates size and motor RPM of base unit.

Performance is for that base unit operated at a reduced speed using the solid state speed control accessory.

AMCA Seal for sound rating does not apply to units with speed control.

Use 5 AMP Speed Control for motors 1/3 HP and smaller.

Use 10 AMP Speed Control for motors 1/2.

MODEL STXD & STXD-RHUL

UPBLAST DIRECT DRIVE CENTRIFUGAL ROOF/SIDEWALL EXHAUSTER FOR GENERAL AND RESTAURANT APPLICATIONS



CENTRIFUGAL ROOF & WALL EXHAUSTERS

APPLICATION

Isolation of the motor from the air stream and the high velocity vertical (roof) or horizontal (wall) air discharge make the Model STXD ideally suited for the removal of dirty, contaminated and/or high temperature air from processes and buildings. Typical applications include restaurant hoods and similar kitchen exhaust ventilation, fume and smoke removal, laboratory fume hood exhaust and chemical process exhaust.

The nonoverloading wheel with its higher static pressure capability makes this unit suitable for either ducted or nonducted applications. Its roof or wall mounting permits location near the area to be ventilated, allowing short duct runs and more efficient operation. They have no belts or fan bearings to maintain or adjust and consequently require very little maintenance.

AMCA SEAL



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models STXD shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



LISTED POWER ROOF VENTILATOR
UL STANDARD 705 (sizes 6-8)
UL STANDARD 762 (sizes 10-15)

CONSTRUCTION

Housing

- Heavy-gauge aluminum for extra strength with prepunched mounting holes.
- Neoprene isolators for reduction of vibration and sound.
- Cover easily removed for quick access to motor compartment.
- Enclosed, ventilated motor compartment isolates motor from exhaust air.
- Water tight conduit tube for easy electrical connection.
- Disconnect is standard.
- Lifting lugs for easy and safe placement on roof.
- Stainless steel exterior fasteners.

Centrifugal Wheel

- All aluminum backward inclined wheel.
- Nonoverloading for safe operation in ducted systems.
- Dynamically balanced for smooth operation.

Speed Controllable Motors

- Standard motors are single speed, speed controllable and drip-proof.
- All motors are rated for continuous duty.
- Disconnect is standard with single speed drip-proof motors.
- Motors ship mounted as standard.

SPEED CONTROL


Solid State Speed Control:

Control is matched to the motor and blower wheel to allow continuous reduction in performance allowing adjustments of airflow for system balancing. CFM is reduced in direct proportion to motor speed reduction. Speed control is only available for single phase. Exhauster performance can be controlled from the ventilated area.

727.1 MAX 1/3 HP-5 AMP 120V
2828.1 MAX 1/2 HP-10 AMP 120V

DIMENSIONAL DATA

MODEL STXD	A	B	C	D	ROOF OPENING	Average Ship Wt. Lbs.
6	18 1/8	25 1/2	28 5/8	19 3/4	13 1/2	90
7	18 1/8	25 1/2	28 5/8	19 3/4	13 1/2	89
8	18 1/8	25 1/2	28 5/8	19 3/4	13 1/2	98
10	18 1/8	25 1/2	28 5/8	19 3/4	13 1/2	114
12	20 1/8	27 1/8	31 1/4	21 3/8	15 1/2	118
14	20 1/8	27 1/8	31 1/4	21 3/8	15 1/2	117
15	24 1/8	27 7/8	36 1/2	22	19 1/2	135
16	24 1/8	27 7/8	36 1/2	22	19 1/2	136

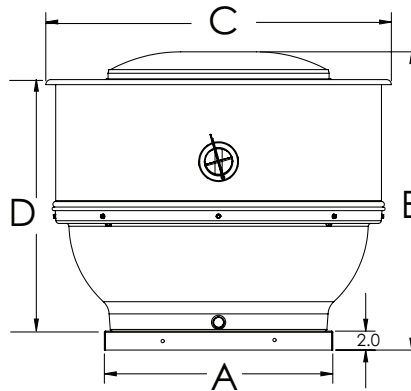

Ship Schedules:	
●	Next Day Shipment From Stock
▲	3 Day Shipment From Stock
◆	10 Day Shipment

ACCESSORIES

MODEL STXD	12" HIGH MOUNTING CURB		GRAVITY DAMPER		DAMPER MOTOR (LOOSE)	115 VOLT SPEED CONTROL	230 VOLT SPEED CONTROL
	OD	STOCK NO.	OD	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
6	16 1/2	711216 ●	12	411012 ●	411611 ●	2727.1 ●	3232.1 ◆
7	16 1/2	711216 ●	12	411012 ●	411611 ●	2727.1 ●	3232.1 ◆
8	16 1/2	711216 ●	12	411012 ●	411611 ●	2727.1 ●	3232.1 ◆

Curb Cap adaptors are available to match old style TXD and competitors curb caps. Refer to Optisizer2 for sizes available on Quickship.

Sizes 6-8 are not suitable for Restaurant applications

MODEL STXD-RHUL	12" HIGH MOUNTING CURB		18" OR 24" HIGH MOUNTING CURB		GRAVITY DAMPER*	DAMPER MOTOR (LOOSE)	115 VOLT SPEED CONTROL		230 VOLT SPEED CONTROL	HINGED BASE KIT	METAL GREASE BOX
	OD	STOCK NO.	STOCK NO.	OD	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
10	16 1/2	711216 ●	722416V ● (24")	12	411012 ●	411611 ●	2727.1 ●	N/A	3232.1 ◆	400252 ●	90005891-A ●
12	18 1/2	711218 ●	722418V ● (24")	14	411014 ●	411611 ●	2727.1 ●	2828.1 ●	3232.1 ◆	400252 ●	90005891-A ●
14	18 1/2	711218 ●	722418V ● (24")	14	411014 ●	411611 ●	2727.1 ●	N/A	3232.1 ◆	400252 ●	90005891-A ●
15	22 1/2	711222 ●	721822V ● (18")	18	411018 ●	411611 ●	N/A	2828.1 ●	3232.1 ◆	400252 ●	90005891-A ●
16	22 1/2	711222 ●	721822V ● (18")	18	411018 ●	411611 ●	N/A	2828.1 ●	3232.1 ◆	400252 ●	90005891-A ●

*You can not use a damper or birdscreen in a grease application

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, JencOFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

ACCESSORIES CONTINUED

MODEL STXD/ STXDRHUL	CURB CAP ADAPTOR (replace TXD with STXD using existing curb)	WALL MOUNT ADAPTOR	BIRDSCREEN*	GREASE GRABBER (roof mounting only)	GREASE GRABBER (sidewall mounting only)
	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
6	CCA1816 ●	400555 ●	400248 ●	-	-
7	CCA1816 ●	400555 ●	400248 ●	-	-
8	CCA1816 ●	400555 ●	400248 ●	-	-
10	CCA1816 ●	400555 ●	400248 ●	708971 ●	708971W ●
12	CCA2024 ●	400557 ●	400249 ●	708971 ●	708971W ●
14	N/A	400557 ●	400249 ●	708971 ●	708971W ●
15	N/A	400559 ●	400250 ●	708971 ●	708971W ●
16	N/A	400559 ●	400250 ●	708971 ●	708971W ●

*You can not use a damper or birdscreen in a grease application

MODEL STXD														<i>Upblast Direct Drive Centrifugal Roof/Sidewall Exhauster</i>		Ventilator with Open Drip-proof Motor	
Model STXD	Motor Hp	Max. BHp	RPM	Sones @ 1/8 SP	CFM at Static Pressure										115/1/60	208-230/1/60	
					0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	Stock No.	Stock No.		
6	1/10	.05	1650	7.1	225	208	191	172	149	115	56	-	-	STXD06CJH1AS ●	STXD06CJH1CS ◆		
	1/10	.05	1650	7.2	308	285	259	231	194	133	68	-	-	STXD06JH1AS ●	STXD06JH1CS ◆		
7	1/10	.04	1650	7.1	437	394	345	287	223	145	80	-	-	STXD07JH1AS ●	STXD07JH1CS ◆		
8	1/25	.04	1150	6.0	612	531	427	-	-	-	-	-	-	STXD08HM1AS ●	-		
	1/4	.14	1750	10.9	935	881	832	773	712	636	536	312	-	STXD08MH1AS ●	STXD08MH1CS ◆		
10	1/4	.12	1150	7.7	979	886	777	657	452	-	-	-	-	STXD10RHULMM1AS ●	STXD10RHULMM1CS ◆		
	1/3	.28	1700	13.8	1445	1385	1319	1248	1175	1100	1015	922	809	STXD10RHULPH1AS ●	STXD10RHULPH1CS ◆		
12	1/4	.15	1150	8.5	1284	1155	1031	883	701	-	-	-	-	STXD12RHULMM1AS ●	STXD12RHULMM1CS ◆		
	1/2	.40	1700	15.3	1918	1831	1751	1665	1574	1485	1387	1282	1168	STXD12RHULQH1AS ●	STXD12RHULQH1CS ◆		
14	1/4	.26	1100	12.4	2148	1998	1830	1651	1411	1077	-	-	-	STXD14RHULMM1AS ◆	STXD14RHULMM1CS ◆		
15	1/2	.39	1150	14.0	2643	2501	2384	2215	2048	1887	1670	1298	-	STXD15RHULQM1AS ◆	STXD15RHULQM1CS ◆		
16	1/2	.49	1150	14.4	3187	3043	2904	2749	2577	2383	2154	1877	-	STXD16RHULQM1AS ◆	STXD16RHULQM1CS ◆		

Speed (RPM) shown is nominal. Performance is based on actual speed of test.
 Performance certified is for installation type A-free inlet, free outlet.
 Performance ratings do not include the effects of birdscreen in the airstream.

The sound ratings shown are the loudness values in the fan sones @ 5' (1.5m) in an hemispherical free field calculated per AMCA Standard 301.
 Installation Type A: free inlet hemispherical sone levels.

MODEL STXB-UL762

UPBLAST BELT DRIVE CENTRIFUGAL ROOF/SIDEWALL EXHAUSTER FOR RESTAURANT AND GENERAL EXHAUST



CENTRIFUGAL ROOF & WALL EXHAUSTERS

APPLICATION

Isolation of motor and drive components from the air stream and the high velocity vertical air discharge make the model STXB-UL762 ideally suited for the removal of dirty, contaminated and/or high temperature air from processes and buildings. Typical applications include restaurant hoods and similar kitchen exhaust ventilation, fume and smoke removal, laboratory fume hood exhaust and chemical process exhaust.

For grease removal applications the fan must be installed per NFPA 96 and with a 40" discharge height and hinged access base.

CONSTRUCTION

Housing

- Heavy-gauge aluminum for extra strength with prepunched mounting holes.
- Neoprene isolators for reduction of vibration and sound.
- Enclosed, ventilated motor/drive compartment isolates motor and drives from exhaust air.
- Cover easily removed for quick access to motor compartment.
- Water tight conduit tube for easy electrical connection.
- External weather proof disconnect is included on standard models.
- Lifting lugs for easy and safe placement on roof.
- Stainless steel exterior fasteners.

Centrifugal Wheel

- All aluminum backward inclined wheel.
- Nonoverloading for safe operation in ducted systems.
- Dynamically balanced for smooth operation.

Drives

- Sized for minimum 150% of drive horsepower.
- Machined cast iron adjustable motor pulleys.
- Adjustable base for belt tensioning.
- Nonstatic oil resistant v-belts.

AMCA SEAL



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models STXB shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



LISTED POWER ROOF VENTILATOR
UL STANDARD 762

Motors


- Single speed open drip-proof are standard.
- All motors are rated for continuous duty.
- 182T and larger motors shipped unmounted for field installation.
- Disconnect switch standard with single speed drip-proof motors.

Bearings

- Heavy-duty ball bearing type.
- Prelubricated and permanently sealed.

DIMENSIONAL DATA

MODEL STXB-RHUL	A	B	C	D	ROOF OPENING	Average Ship Wt. Lbs.
8	18 1/8	29 1/3	28 5/8	24 1/3	13 1/2	123
10	18 1/8	29 1/3	28 5/8	24 1/3	13 1/2	124
12	20 1/8	30 7/8	31 1/3	25 7/8	15 1/2	136
14	20 1/8	30 7/8	31 1/3	25 7/8	15 1/2	138
15	24 1/8	31 3/8	36 1/2	26 5/8	19 1/2	155
16	24 1/8	31 3/8	36 1/2	26 5/8	19 1/2	155

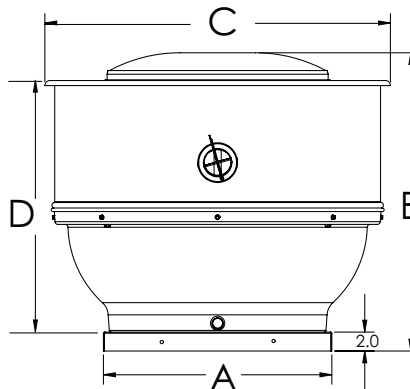

Ship Schedules:	
●	Next Day Shipment From Stock
▲	3 Day Shipment From Stock
◆	10 Day Shipment

Curb Cap adaptors are available to match old style TXB and competitors curb caps. Refer to Optimizer2 for sizes available on Quickship.

ACCESSORIES

MODEL STXB-RHUL	12" HIGH MOUNTING CURB (1)		18" HIGH MOUNTING CURB	DAMPER (2)		DAMPER MOTOR (LOOSE)	AUTOMATIC BELT TENSIONER (INSTALLED)	HINGED BASE KIT	METAL GREASE BOX
	OD	STOCK NO.	STOCK NO.	OD	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
8	16 1/2	711216 ●	721816V ●	12	411012 ●	411611 ●	100069 ●	400252 ●	90005891-A ●
10	16 1/2	711216 ●	721816V ●	12	411012 ●	411611 ●	100069 ●	400252 ●	90005891-A ●
12	18 1/2	711218 ●	721818V ●	14	411014 ●	411611 ●	100070 ●	400252 ●	90005891-A ●
14	18 1/2	711218 ●	721818V ●	14	411014 ●	411611 ●	100070 ●	400252 ●	90005891-A ●
15	22 1/2	711222 ●	721822V ●	18	411018 ●	411611 ●	100070 ●	400252 ●	90005891-A ●
16	22 1/2	711222 ●	721822V ●	18	411018 ●	411611 ●	100070 ●	400252 ●	90005891-A ●

1 - RESTAURANT CURBS MUST BE 18" HIGH MINIMUM PER NFPA-96.

2 - DO NOT USE DAMPER FOR FANS IN GREASE REMOVAL APPLICATIONS PER NFPA 96.

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

ACCESSORIES CONTINUED

MODEL STXB	CURB CAP ADAPTOR (replace TXB with STXB using existing curb)	WALL MOUNT ADAPTOR	BIRDSCREEN (3)	GREASE GRABBER	GREASE GRABBER FOR WALL
	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
8	CCA1816 ●	400555 ●	400248 ●	708971 ●	708971W ●
10	CCA1816 ●	400555 ●	400248 ●	708971 ●	708971W ●
12	CCA2024 ●	400557 ●	400249 ●	708971 ●	708971W ●
14	N/A	400557 ●	400249 ●	708971 ●	708971W ●
15	N/A	400559 ●	400250 ●	708971 ●	708971W ●
16	N/A	400559 ●	400250 ●	708971 ●	708971W ●

3 - DO NOT USE FOR UL762 APPLICATIONS

MODEL STXB-UL762					Upblast Belt Drive Centrifugal Restaurant Roof Exhauster							Ventilator with Open Drip-proof Motor and Drive Assembly	
Model STXB	Motor Hp	Max. BHp	RPM	Sones @ 1/4 SP	CFM at Static Pressure							115/1/60*	208-230/460/3/60
					0	1/4	1/2	3/4	1	1-1/4	1-1/2	Stock No.	Stock No.
8	1/4	0.13	1,550	9.0	833	714	560	-	-	-	-	STXB08RHULML1S ●	STXB08RHULML3S ▲
	1/4	0.19	1,750	11.5	940	837	720	544	-	-	-	STXB08RHULMM1S ●	STXB08RHULMM3S ▲
	1/4	0.26	1,950	13.5	1047	955	855	732	505	-	-	STXB08RHULMH1S ●	STXB08RHULMH3S ▲
	1/3	0.33	2100	15.0	1128	1041	951	850	705	-	-	STXB08RHULPH1S ●	STXB08RHULPH3S ▲
10	1/4	0.26	1600	12.9	1342	1198	1044	864	-	-	-	STXB10RHULMH1S ●	STXB10RHULMH3S ▲
	1/3	0.37	1800	15.4	1510	1384	1252	1106	934	571	-	STXB10RHULPH1S ●	STXB10RHULPH3S ●
12	1/4	0.26	1450	11.8	1602	1417	1213	958	-	-	-	STXB12RHULMH1S ●	STXB12RHULMH3S ▲
	1/3	0.35	1600	13.8	1768	1599	1431	1221	950	-	-	STXB12RHULPH1S ●	STXB12RHULPH3S ▲
	1/2	0.5	1800	16.5	1989	1840	1698	1520	1331	1086	-	STXB12RHULQH1S ●	STXB12RHULQH3S ●
14	1/4	0.24	1050	9.0	2122	1847	1472	-	-	-	-	STXB14RHULMH1S ●	STXB14RHULMH3S ▲
	1/3	0.36	1200	11.9	2425	2191	1895	1506	-	-	-	STXB14RHULPH1S ●	STXB14RHULPH3S ▲
	1/2	0.52	1350	15.0	2728	2525	2289	1987	-	-	-	STXB14RHULQH1S ●	STXB14RHULQH3S ●
	3/4	0.78	1550	19.1	3132	2960	2763	2537	2269	1947	-	STXB14RHULRH1S ●	STXB14RHULRH3S ●
	1	1.03	1700	22.0	3435	3280	3105	2917	2688	2439	2141	STXB14RHULSH1S ●	STXB14RHULSH3S ●
15	1/4	0.26	1000	8.6	2302	1998	1627	-	-	-	-	STXB15RHULMH1S ●	STXB15RHULMH3S ▲
	1/3	0.34	1100	10.2	2533	2260	1953	1519	-	-	-	STXB15RHULPH1S ●	STXB15RHULPH3S ▲
	1/2	0.5	1250	13.3	2878	2644	2383	2079	1641	-	-	STXB15RHULQH1S ●	STXB15RHULQH3S ●
	3/4	0.78	1450	17.8	3338	3143	2921	2693	2423	2085	-	STXB15RHULRH1S ●	STXB15RHULRH3S ●
	1	1.05	1600	21.0	3684	3510	3311	3107	2895	2638	2325	STXB15RHULSH1S ●	STXB15RHULSH3S ●
16	1/4	0.26	900	9.3	2555	2201	1740	-	-	-	-	STXB16RHULMH1S ●	STXB16RHULMH3S ●
	1/3	0.35	1000	10.9	2839	2524	2152	1511	-	-	-	STXB16RHULPH1S ●	STXB16RHULPH3S ●
	1/2	0.55	1150	14.0	3265	2994	2699	2334	1687	-	-	STXB16RHULQH1S ●	STXB16RHULQH3S ●
	3/4	0.79	1300	17.8	3691	3453	3202	2919	2579	2051	-	STXB16RHULRH1S ●	STXB16RHULRH3S ●
	1	0.99	1400	21.0	3975	3755	3524	3276	2988	2645	1953	STXB16RHULSH1S ●	STXB16RHULSH3S ●

Power ratings (BHP) do not include transmission losses.

Performance certified is for installation type A-free inlet, free outlet. Performance ratings do not include the effects of birdscreen in the airstream.

The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301.

Installation Type A: free inlet hemispherical sone levels.

*Tri-voltage (115-208-230) is standard on 3/4 through 1 1/2 Hp Single phase motors. Tri-voltage is available for the 1/2 Hp motors. Inquire for price and delivery.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL TXB-UL762

UPBLAST BELT DRIVE

CENTRIFUGAL ROOF EXHAUSTER

FOR RESTAURANT AND GENERAL EXHAUST



CENTRIFUGAL ROOF & WALL EXHAUSTERS

APPLICATION

Isolation of motor and drive components from the air stream and the high velocity vertical air discharge make the model TXB-UL762 ideally suited for the removal of dirty, contaminated and/or high temperature air from processes and buildings. Typical applications include restaurant hoods and similar kitchen exhaust ventilation, fume and smoke removal, laboratory fume hood exhaust and chemical process exhaust.

For grease removal applications the fan must be installed per NFPA 96 and with a 40" discharge height and hinged access base.

CONSTRUCTION

Housing

- Heavy-gauge aluminum for extra strength with prepunched mounting holes.
- Neoprene isolators for reduction of vibration and sound.
- Enclosed, ventilated motor/drive compartment isolates motor and drives from exhaust air.
- Cover easily removed for quick access to motor compartment.
- Water tight conduit tube for easy electrical connection.
- External weather proof disconnect is included on standard models.
- Stainless steel exterior fasteners.

Centrifugal Wheel

- All aluminum backward inclined wheel.
- Nonoverloading for safe operation in ducted systems.
- Statically and dynamically balanced for smooth operation.

Drives

- Sized for minimum 150% of drive horsepower.
- Machined cast iron adjustable motor pulleys.
- Adjustable base for belt tensioning.
- Nonstatic oil resistant v-belts.

AMCA SEAL



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models TXB shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



LISTED POWER ROOF VENTILATOR
UL STANDARD 762

Motors


- Single speed open drip-proof are standard.
- All motors are rated for continuous duty.
- 182T and larger motors shipped unmounted for field installation.
- Disconnect switch standard with single speed drip-proof motors.

Bearings

- Heavy-duty ball bearing type.
- Prelubricated and permanently sealed.

DIMENSIONAL DATA

MODEL TXB-RHUL	A	B	C	D	E	ROOF OPENING	Average Ship Wt. Lbs.
18/20	29 1/2	37 3/4	28 1/2	31 3/4	2 1/2	24 3/4	120
24	35 1/2	47 1/4	31 1/2	41	2 1/2	30 3/4	245
30	42 1/2	56 3/4	42 1/2	44	2 1/2	37 3/4	365
36	42 1/2	66	47 1/2	46	2 1/2	37 3/4	365



Ship Schedules:	
●	Next Day Shipment From Stock
▲	3 Day Shipment From Stock
◆	10 Day Shipment

ACCESSORIES

MODEL TXB-RHUL	12" HIGH MOUNTING CURB (1)		18" HIGH MOUNTING CURB		DAMPER (2)		DAMPER MOTOR (LOOSE)	AUTOMATIC BELT TENSIONER (INSTALLED)	HINGED BASE KIT	METAL GREASE BOX	GREASE GRABBER	BIRDSCREEN (3)
	OD	STOCK NO.	STOCK NO.	OD	STOCK NO.	STOCK NO.						
18	27 3/4	611227 ●	621828V ●	24	411024 ●	411611 ●	100070 ●	98028001HD ●	90005891-B ●	708971 ●	100912KIT ●	
20	27 3/4	611227 ▲	621828V ▲	24	411024 ▲	411611 ▲	100070 ▲	98028001HD ▲	90005891-B ▲	708971 ▲	100913KIT ▲	
24	33 3/4	611233 ▲	621834V ▲	30	411030 ▲	411611 ▲	100072 ▲	98028001HD ▲	90005891-B ▲	708971 ▲	N/A	
30	40 3/4	611240 ◆	621841V ◆	36	611036 ◆	411611 ◆	N/A	N/A	90005891-B ◆	708971 ◆	N/A	
36	40 3/4	611240 ◆	621841V ◆	36	611036 ◆	411611 ◆	N/A	N/A	90005891-C ◆	708971 ◆	N/A	

- 1 - RESTAURANT CURBS MUST BE 18" HIGH MINIMUM PER NFPA-96.
- 2 - DO NOT USE DAMPER FOR FANS IN GREASE REMOVAL APPLICATIONS PER NFPA 96.
- 3 - DO NOT USE FOR UL762 APPLICATIONS

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. *Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.*

MODEL TXB-UL762					Upblast Belt Drive Centrifugal Restaurant Roof Exhauster								Ventilator with Open Drip-proof Motor and Drive Assembly	
Model TXB	Motor Hp	Max. BHp	RPM	Sones @ 1/4 SP	CFM at Static Pressure								115/1/60*	208-230/460/3/60
					0	1/4	3/8	1/2	5/8	3/4	1	1 1/4	Stock No.	Stock No.
18	1/2	0.50	940	12.5	3382	3058	2886	2696	2488	2243	-	-	TXB18RHULQH1S ●	TXB18RHULQH3S ●
	3/4	0.74	1075	16.0	3868	3584	3442	3288	3123	2950	2786	-	TXB18RHULRH1S ●	TXB18RHULRH3S ●
	1	1.04	1200	19.4	4318	4063	3937	3808	3668	3521	3201	2816	TXB18RHULSH1S ●	TXB18RHULSH3S ●
	1 1/2	1.49	1350	24	4857	4630	4518	4406	4291	4169	3906	3621	TXB18RHULTH1S ●	TXB18RHULTH3S ●
20	1/2	0.54	775	12.5	4152	3666	3392	3054	2554	1910	-	-	TXB20RHULQH1S ▲	TXB20RHULQH3S ▲
	3/4	0.77	875	15.7	4688	4264	4034	3784	3482	3067	1902	-	TXB20RHULRH1S ▲	TXB20RHULRH3S ▲
	1	1.07	975	19.1	5224	4848	4646	4436	4208	3944	3175	2072	TXB20RHULSH1S ▲	TXB20RHULSH3S ▲
	1 1/2	1.60	1115	24	5974	5649	5477	5300	5116	4923	4470	3808	TXB20RHULTH1S ▲	TXB20RHULTH3S ▲
24	1/3	0.33	495	8.0	4555	3731	3018	-	-	-	-	-	TXB24RHULPH1S ▲	TXB24RHULPH3S ▲
	1/2	0.50	565	10.3	5199	4519	4063	3346	-	-	-	-	TXB24RHULQH1S ▲	TXB24RHULQH3S ▲
	3/4	0.75	650	13.6	5981	5413	5072	4661	4099	2979	-	-	TXB24RHULRH1S ▲	TXB24RHULRH3S ▲
	1	1.03	720	16.6	6626	6123	5835	5509	5124	4623	-	-	TXB24RHULSH1S ▲	TXB24RHULSH3S ▲
	1 1/2	1.51	820	22	7546	7113	6874	6616	6332	6010	5146	2245	TXB24RHULTH1S ▲	TXB24RHULTH3S ▲
	2	2.00	900	26	8282	7892	7681	7457	7216	6956	6339	5433	TXB24RHULVH1S ▲	TXB24RHULVH3S ▲
30	1/2	0.50	405	7.5	6240	5466	4315	-	-	-	-	-	TXB30RHULQH1S ◆	TXB30RHULQH3S ◆
	3/4	0.76	465	9.6	7356	6730	5973	4894	-	-	-	-	TXB30RHULRH1S ◆	TXB30RHULRH3S ◆
	1	1.00	510	11.5	8176	7622	7003	6221	5125	-	-	-	TXB30RHULSH1S ◆	TXB30RHULSH3S ◆
	1 1/2	1.51	585	14.8	9525	9055	8555	8001	7334	6495	-	-	TXB30RHULTH1S ◆	TXB30RHULTH3S ◆
	2	2.07	650	17.7	10680	10263	9827	9364	8855	8262	6658	-	TXB30RHULVH1S ◆	TXB30RHULVH3S ◆
	3	3.00	735	22	12177	11812	11437	11047	10637	10199	9152	7730	N/A ◆	TXB30RHULWH3S ◆
	5	5.05	875	28	14623	14319	14011	13696	13373	13040	12332	11522	N/A ◆	TXB30RHULXH3S ◆
36	3/4	0.75	355	7.7	10252	8369	6717	-	-	-	-	-	TXB36RHULRH1S ◆	TXB36RHULRH3S ◆
	1	1.03	395	9.4	11407	9844	8611	6793	-	-	-	-	TXB36RHULSH1S ◆	TXB36RHULSH3S ◆
	1 1/2	1.53	450	12.0	12996	11710	10832	9685	8075	6094	-	-	TXB36RHULTH1S ◆	TXB36RHULTH3S ◆
	2	2.04	495	14.2	14295	13165	12449	11560	10483	8988	-	-	TXB36RHULVH1S ◆	TXB36RHULVH3S ◆
	3	3.03	565	17.7	16317	15361	14795	14146	13377	12455	9936	-	N/A ◆	TXB36RHULWH3S ◆
	5	5.05	670	24	19349	18568	18131	17654	17131	16548	15128	13471	N/A ◆	TXB36RHULXH3S ◆

Power ratings (BHP) do not include transmission losses.

Performance certified is for installation type A-free inlet, free outlet. Performance ratings include the effects of birdscreen in the airstream.

The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301.

Installation Type A: free inlet hemispherical sone levels.

*Tri-voltage (115-208-230) is standard on 3/4 through 1 1/2 Hp Single phase motors. Tri-voltage is available for the 1/2 Hp motors. Inquire for price and delivery.

MODEL CWD

DIRECT DRIVE CENTRIFUGAL SIDEWALL EXHAUSTER



APPLICATION

Models CWD are used to exhaust relatively clean air from a variety of industrial, commercial and institutional buildings such as machinery and equipment rooms, storage areas, office buildings, restaurants, retail stores, schools and similar buildings.

The nonoverloading centrifugal wheel with its high static pressure capability, makes it suitable for either ducted or nonducted applications.

The spun aluminum exterior provides a pleasing appearance, weather proof construction and resistance to corrosion. The low silhouette design is less noticeable on the building exterior and the removable dome provides easy access to the fan interior for service and cleaning.

Direct drive units use smaller diameter wheels, resulting in low sound levels and quiet operation. They have no belts or fan bearings to maintain or adjust and consequently require very little maintenance.

CONSTRUCTION

Housing

- Spun aluminum dome for weather protection and attractive appearance.
- Ventilated motor compartment with motor out of air stream for long trouble-free service.
- Dome easily removes for access to motor compartment.
- Weather-tight construction with aluminum birdscreen.
- Round duct connection provided at wheel inlet.

Centrifugal Wheel

- Nonoverloading backward inclined for safe operation in ducted systems.
- Statically and dynamically balanced for smooth, quiet operation.

Motors

- Speed controllable motors available on most models.
- Single speed open drip-proof are standard.
- Plug disconnect switch standard with single speed drip-proof motors.

ACCESSORIES

Solid State Speed Control:

Control is matched to the motor and blower wheel to allow continuous reduction in performance allowing adjustments of airflow for system balancing. CFM is reduced in direct proportion to motor speed reduction. Speed control is only available for single phase. Exhauster performance can be controlled from the ventilated area.

AMCA SEAL




JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CWD shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



LISTED POWER ROOF VENTILATOR
UL STANDARD 705

DIMENSIONAL DATA

MODEL CWD	A	B	C	D	E	G	Average Ship Wt. Lbs.
7	15	8	5 5/16	1 1/2	8	8	15
8	20	9	9 15/16	2	12	11	25
9	26	13 1/2	11 15/16	3	15	14	37
10	26	13 1/2	11 15/16	3	15	14	37
12	30	15 1/2	13 15/16	3	17 1/2	14	50
14	36	16 1/2	17 15/16	4	22	18	84

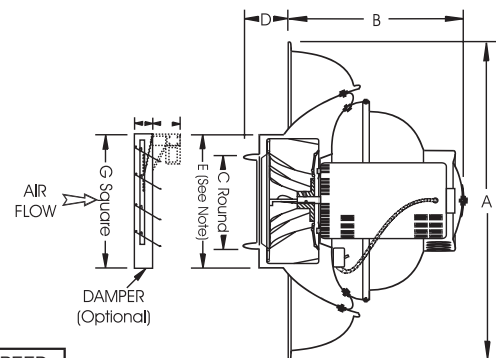

ACCESSORIES

MODEL CWD	RECOMMENDED GRAVITY DAMPER		DAMPER MOTOR (LOOSE)	115 VOLT SPEED CONTROL	230 VOLT SPEED CONTROL
	OD	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
7	8 x 8	411008 ●	411611 ●	2727.1 ●	N/A
8	11 x 11	411011 ●	411611 ●	2727.1 ●	N/A
9	14 x 14	411014 ●	411611 ●	2727.1 ●	3232.1 ♦
10	14 x 14	411014 ●	411611 ●	2727.1 ●	3232.1 ♦
12	14 x 14	411014 ●	411611 ●	2727.1 ●	3232.1 ♦
14	18 x 18	411018 ●	411611 ●	2828.1 ●	3232.1 ♦

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
♦ 10 Day Shipment

SPEED CONTROL 2727.1 MAX 1/3 HP-5 AMP 120V
2828.1 MAX 1/2 HP-10 AMP 120V

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS.

DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL CWD		Direct Drive Centrifugal Sidewall Exhauster												Ventilator with Open Drip-proof Motor		
Model CWD	Motor Hp	Max. BHp	RPM	Sones @ 1/8 SP	CFM at Static Pressure										115/1/60	208-230/1/60
					0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	Stock No.	Stock No.	
7	1/25	0.04	1550	5.9	254	220	179	127	66	-	-	-	-	CWD07HH1AS ●	N/A	
8	1/15	0.07	1550	11.4	524	463	390	320	249	186	132	-	-	CWD08IH1AS ●	N/A	
9	1/4	0.12	1140	6.4	898	755	564	390	221	-	-	-	-	CWD09MM1AS ●	CWD09MM1CS ♦	
	1/4	0.26	1550	11.4	1221	1126	1009	894	771	645	545	-	-	CWD09MH1AS ●	CWD09MH1CS ♦	
10	1/3	0.33	1575	15.4	1453	1355	1252	1118	921	785	663	548	433	CWD10PH1AS ●	CWD10PH1CS ♦	
12	1/4	0.26	1100	10.6	1583	1393	1195	995	813	618	410	193	-	CWD12MM1AS ●	CWD12MM1CS ♦	
14	1/2	0.50	1080	15.7	2585	2454	2281	2040	1722	1433	1170	906	670	CWD14QM1AS ●	CWD14QM1CS ♦	

Speed (RPM) shown is nominal. Performance is based on actual speed of test.
 Performance certified is for installation type A-free inlet, free outlet.
 Performance ratings include the effects of birdscreen in the airstream.

The sound ratings shown are the loudness values in the fan sones @ 5' (1.5m) in an hemispherical free field calculated per AMCA Standard 301.
 Installation Type A: free inlet hemispherical sone levels.

Performance Data at Reduced Speed														
Model CWD	Motor Hp	Max. BHp	RPM	Sones @ 1/8 SP	CFM at Static Pressure									
					0	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	
7-1550	1/25	0.02	930	1.5	152	84	-	-	-	-	-	-	-	-
		0.02	1230	3.4	202	156	93	-	-	-	-	-	-	-
8-1550	1/15	0.02	930	3.5	320	209	98	-	-	-	-	-	-	-
		0.05	1225	6.4	421	339	251	167	-	-	-	-	-	-
9-1075	1/4	0.03	685	1.9	540	258	-	-	-	-	-	-	-	-
		0.08	940	4.3	741	554	330	-	-	-	-	-	-	-
9-1625	1/4	0.09	1030	5.6	811	651	467	313	-	-	-	-	-	
10-1625	1/3	0.10	1030	7.2	950	794	540	357	173	-	-	-	-	
12-1075	1/4	0.07	685	3.6	986	670	365	-	-	-	-	-	-	
		0.15	900	7.0	1296	1058	816	589	340	-	-	-	-	
14-1140	1/2	0.14	685	6.7	1640	1382	913	498	-	-	-	-	-	
		0.30	900	11.0	2154	1987	1730	1346	1028	711	390	-	-	

Model in reduced speed table indicates size and motor RPM of base unit.
 Performance is for that base unit operated at a reduced speed using the solid state speed control accessory.

AMCA Seal for sound rating does not apply to units with speed control.

Use 5 AMP Speed Control for motors 1/3 HP and smaller.
 Use 10 AMP Speed Control for motors 1/2.

MODEL KSF

BELT DRIVE CENTRIFUGAL FILTERED ROOF SUPPLY FAN

APPLICATION

Models KSF fans are primarily used for filtered make-up air in kitchen hood applications but may also be specified for make-up air in commercial and industrial applications such as manufacturing and assembly areas.

Model KSF's rugged design with heavy-gauge galvanized construction provides maximum weather protection, long life and the utmost in performance efficiency. The forward curved centrifugal blower provides efficient air flow at low sound levels.

Filters are washable and are reusable to reduce maintenance costs. Quick release hood latches make routine cleaning and maintenance fast and easy.

CONSTRUCTION

Blower


- Statically and dynamically balanced forward curved wheel.
- Prepunched mounting holes.
- Conduit opening for wiring from below unit.
- Disconnect switch is standard equipment.

Hood

- Heavy-gauge galvanized steel.
- Quick-release latches for removal from housing.
- Insulated for sound absorption and moisture barrier.
- 1 inch washable aluminum mesh filters.

Drives

- Machined cast iron adjustable motor pulleys standard through 3 HP.
- Pivoting motor plate for belt tensioning.
- Static resistant v-belts.

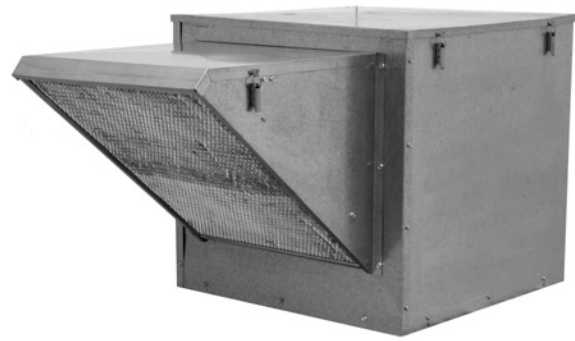

Bearings

- Heavy-duty ball bearing type.
- Prelubricated and permanently sealed.

Motors

- Open drip-proof construction is standard.
- Optional motor enclosures and types can be specified.

AMCA SEAL




JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models KSF shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



LISTED POWER ROOF VENTILATOR
UL STANDARD 705

DIMENSIONAL DATA

MODEL KSF	A	B	C	D	ROOF OPENING	Average Ship Wt. Lbs.
9	24 1/4	24 1/2	17 7/8	19	19 1/2	215
10	27 3/8	28 1/2	21 1/8	22 1/2	23 1/2	245
12	32 3/4	32 1/2	26 1/2	27 7/8	28	255
15	37 3/8	32 1/2	34 1/4	30 1/8	28	310
18	41 3/8	36 1/2	38 1/4	33 3/8	32	350

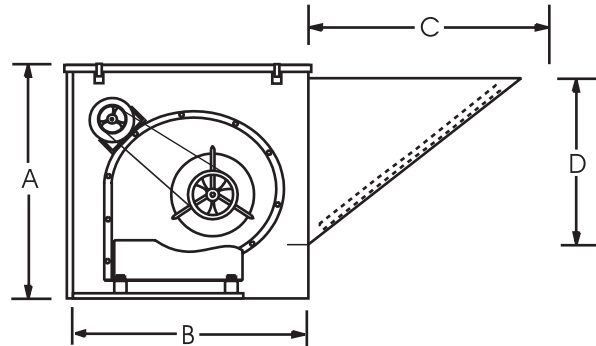

ACCESSORIES

MODEL KSF	RECOMMENDED 12" HIGH MOUNTING CURB		RECOMMENDED GRAVITY DAMPER		DAMPER MOTOR (LOOSE)
	OD	STOCK NO.	OD	STOCK NO.	STOCK NO.
9	22 1/2	92212221 ●	16	S3GA16CB ●	MP2781 ●
10	26 1/2	92612221 ●	20	S3GA20CB ●	MP2781 ●
12	31	2302.12.15CSF ●	24	S3GA24CB ●	MP2781 ●
15	31	2302.12.15CSF ●	24	S3GA24CB ●	MP2781 ●
18	35	2302.12.18CSF ▲	27	S3GA27CB ▲	MP2781 ▲

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
◆ 10 Day Shipment

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

CENTRIFUGAL FILTERED SUPPLY

MODEL KSF		Belt-Drive Centrifugal Filtered Roof Supply Fan					RPM at Static Pressure										
Model KSF	Motor Hp	Max. BHp	Single Phase 115/208/230	Three Phase 208/230/460	CFM	Outlet Velocity FPM	1/8	1/4	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2		
			STOCK NO.	STOCK NO.			1/8	1/4	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2		
9	1/4	0.25	KSF09ML1S ● (486-625) KSF09MH1S ● (625-904)	KSF09ML3S ▲ (486-625) KSF09MH3S ▲ (625-904)	375	426	486	-	-	-	-	-	-	-	-	-	
					475	540	502	-	-	-	-	-	-	-	-	-	
					575	653	526	694	-	-	-	-	-	-	-	-	-
					675	767	558	711	846	-	-	-	-	-	-	-	-
					775	881	597	733	861	-	-	-	-	-	-	-	-
					875	994	640	762	880	-	-	-	-	-	-	-	-
					975	1108	688	796	904	1009	-	-	-	-	-	-	-
					1075	1222	737	835	934	1031	1125	1214	-	-	-	-	-
	1175	1335	789	878	968	1058	1146	1232	-	-	-	-	-				
	1/3	0.33	KSF09PH1S ●	KSF09PH3S ▲	1275	1449	842	923	1006	1089	1172	1253	1407	-	-		
	1/2	0.50	KSF09QH1S ●	KSF09QH3S ●	1375	1563	895	971	1047	1124	1202	1278	1426	-	-		
					1475	1676	950	1020	1091	1163	1235	1307	1447	-	-		
1575					1790	1005	1071	1137	1204	1271	1339	-	-	-			
1675					1903	1061	1122	1184	1247	1310	1374	-	-	-			
3/4	0.75	KSF09RH1S ●	KSF09RH3S ●	1775	2017	1118	1175	1233	1292	-	-	-	-	-			
				1875	2131	1175	1229	1283	-	-	-	-	-	-			
1	1.00	KSF09SH1S ●	KSF09SH3S ●	1975	2244	1232	-	-	-	-	-	-	-	-			
10	1/4	0.25	KSF10MH1S ●	KSF10MH3S ▲	1050	981	533	-	-	-	-	-	-	-	-		
					1150	1075	564	662	756	-	-	-	-	-	-		
					1250	1168	596	687	776	860	-	-	-	-	-		
					1350	1262	628	714	797	877	955	-	-	-	-		
	1450	1355	662	743	821	897	970	1042	-	-	-	-					
	1/3	0.33	KSF10PH1S ●	KSF10PH3S ▲	1550	1449	697	773	847	918	989	1057	-	-			
	1/2	0.50	KSF10QH1S ●	KSF10QH3S ●	1650	1542	732	804	874	942	1009	1074	1200	-	-		
					1750	1636	767	836	903	967	1031	1093	1214	1330	-		
	3/4	0.75	KSF10RH1S ●	KSF10RH3S ●	1850	1729	803	869	932	994	1054	1114	1230	1342	1449		
					1950	1822	839	902	963	1022	1080	1137	1248	1356	-		
	1	1.00	KSF10SH1S ●	KSF10SH3S ●	2050	1916	876	936	994	1051	1106	1161	1268	1372	-		
					2150	2009	913	971	1026	1080	1134	1186	1289	-	-		
1 1/2	1.50	KSF10TH1S ●	KSF10TH3S ●	2250	2103	950	1005	1059	1111	1162	1213	1312	-	-			
				2350	2196	987	1040	1092	1142	1192	1240	-	-	-			
				2450	2290	1024	1076	1126	1175	1222	1269	-	-	-			
				2550	2383	1062	1112	1160	1207	1253	-	-	-	-			
12	1/4	0.25	KSF12MH1S ●	KSF12MH3S ▲	2650	2477	1099	1148	1195	-	-	-	-	-			
					2750	2570	1137	1184	-	-	-	-	-	-	-		
					1150	767	378	495	-	-	-	-	-	-	-		
	1/3	0.33	KSF12PH1S ●	KSF12PH3S ▲	1350	900	404	508	604	-	-	-	-	-			
					1600	1067	444	532	618	-	-	-	-	-			
	1/2	0.50	KSF12QH1S ●	KSF12QH3S ●	1800	1200	479	556	635	711	-	-	-	-			
					2000	1333	516	585	656	726	794	-	-	-			
	3/4	0.75	KSF12RH1S ●	KSF12RH3S ●	2200	1467	555	617	681	745	808	870	-	-			
					2400	1600	594	651	709	768	827	885	-	-			
					2600	1733	635	687	740	794	849	903	1009	-			
	1	1.00	KSF12SH1S ●	KSF12SH3S ●	2700	1800	655	705	757	808	861	913	1016	1114			
					2800	1867	676	724	773	823	874	924	1024	-			
2900					1933	697	743	790	839	887	936	1033	-				
1 1/2	1.50	KSF12TH1S ●	KSF12TH3S ●	3000	2000	718	762	808	854	901	948	1042	-				
				3100	2067	739	782	826	871	916	961	-	-				
				3200	2133	760	802	844	887	931	975	-	-				
2	2.00	N/A	KSF12VH3S ●	3400	2267	803	842	881	922	962	-	-	-				
				3600	2400	845	882	919	-	-	-	-	-				
				3800	2533	888	-	-	-	-	-	-	-				

Power ratings (BHP) do not include transmission losses. Performance certified is for installation type B-free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). 575/3/60 ODP Motors are available for most motor HP's - Refer to Price List.

Table shows fan RPM needed for required CFM and SP. Shaded/Non-shaded area shows motor HP and stock number to order.

MODEL KSF *Belt-Drive Centrifugal Filtered Roof Supply Fan*

Model KSF	Motor Hp	Max. BHP	Single Phase 115/208/230	Three Phase 208/230/460	CFM	Outlet Velocity FPM	RPM at Static Pressure									
			STOCK NO.	STOCK NO.			1/8	1/4	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2	2
15	1/4	0.25	KSF15MH1S ●	KSF15MH3S ▲	1625	763	355	441	517	-	-	-	-	-	-	-
					2025	951	403	475	543	606	-	-	-	-	-	-
	1/3	0.33	KSF15PH1S ●	KSF15PH3S ▲	2425	1138	456	517	576	633	688	-	-	-	-	-
					2825	1326	512	565	617	668	717	765	-	-	-	-
	1/2	0.50	KSF15QH1S ●	KSF15QH3S ●	2825	1326	512	565	617	668	717	765	-	-	-	-
					3230	1516	572	617	663	708	753	797	-	-	-	-
	3/4	0.75	KSF15RH1S ●	KSF15RH3S ●	3230	1516	572	617	663	708	753	797	-	-	-	-
					3640	1709	633	674	714	755	795	835	913	-	-	-
	1	1.00	KSF15SH1S ●	KSF15SH3S ●	3640	1709	633	674	714	755	795	835	913	-	-	-
					3840	1803	664	702	741	779	817	855	930	1002	-	-
					4045	1899	695	731	768	805	841	877	949	1018	1085	-
	1 1/2	1.50	"KSF15TL1S (664-775) KSF15TH1S (775-835)"	"KSF15TL3S (664-775) KSF15TH3S (775-835)"	4245	1993	726	761	795	830	865	900	968	1035	1100	-
4445					2087	757	790	823	857	890	923	989	1053	-	-	
2	2.00	N/A	KSF15VH3S ●	4645	2181	788	820	851	883	915	947	1010	-	-	-	
				4850	2277	820	850	881	911	942	972	1033	-	-	-	
				5050	2371	851	880	910	939	968	998	-	-	-	-	
				5200	2441	875	903	932	960	989	-	-	-	-	-	
3	3.00	N/A	KSF15WH3S ●	5400	2535	907	934	961	-	-	-	-	-	-		
				5600	2629	938	-	-	-	-	-	-	-	-	-	
				5800	2723	969	-	-	-	-	-	-	-	-	-	
				6000	2817	1000	-	-	-	-	-	-	-	-	-	
18	1/4	0.25	KSF18MH1S ▲	KSF18MH3S ▲	2200	748	324	386	-	-	-	-	-	-	-	
					2400	816	341	400	454	-	-	-	-	-	-	
	1/3	0.33	KSF18PH1S ▲	KSF18PH3S ▲	2800	952	379	431	480	526	570	611	-	-	-	
					3000	1020	398	448	495	539	581	621	696	-	-	
	1/2	0.50	KSF18QH1S ▲	KSF18QH3S ▲	3400	1156	438	483	526	566	605	643	714	780	842	
					3600	1224	458	502	542	581	619	655	724	789	849	961
	3/4	0.75	KSF18RH1S ▲	KSF18RH3S ▲	4200	1429	520	559	595	630	664	696	759	819	876	
					4600	1565	562	599	632	665	696	727	786	842	897	
	1	1.00	KSF18SH1S ▲	KSF18SH3S ▲	5200	1769	626	659	690	720	749	776	830	883	933	
					5400	1837	648	680	710	739	767	794	846	897	-	
	2	2.00	N/A	KSF18VH3S ▲	5800	1973	691	721	750	777	803	829	879	-	-	
					6000	2041	713	742	770	796	822	847	-	-	-	
3	3.00	N/A	KSF18WH3S ▲	6400	2177	756	784	810	836	-	-	-	-			
				6600	2245	778	805	831	-	-	-	-	-	-		

CENTRIFUGAL FILTERED SUPPLY

Power ratings (BHP) do not include transmission losses.
 Performance certified is for installation type B-free inlet, ducted outlet.
 Performance ratings do not include the effects of appurtenances (accessories).
 575/3/60 ODP Motors are available for most motor HP's - Refer to Price List.

Table shows fan RPM needed for required CFM and SP.
 Shaded/Non-shaded area shows motor HP and stock number to order.

MODEL KSF Sound Power Data

Model KSF	RPM	SP	Sound Power RE 10 ⁻¹² Watts Octive Bands, Hz								L _{WD} dB(A)
			63	125	250	500	1000	2000	4000	8000	
9	500	0.125	76	66	57	52	49	46	42	34	57
	600	0.125	84	74	64	59	57	54	51	43	65
	700	0.125	88	80	70	64	62	60	58	50	70
	700	0.250	87	79	68	61	58	55	52	45	68
	800	0.125	90	85	75	69	66	64	62	56	75
	800	0.250	90	84	74	66	63	61	58	52	73
	900	0.125	93	89	80	72	70	67	65	60	79
	900	0.250	92	89	79	71	68	65	63	58	78
	1000	0.125	94	93	84	76	73	71	68	64	82
	1000	0.250	94	93	83	75	71	69	66	62	81
	1000	0.500	93	91	81	72	67	64	61	57	79
	1100	0.250	96	96	87	78	74	72	69	66	85
	1100	0.500	96	95	85	76	71	68	66	62	83
	1200	0.125	98	99	91	81	78	76	73	71	88
	1200	0.500	97	99	89	79	74	72	69	66	87
	1300	0.250	99	102	93	83	79	77	74	72	90
	1300	1.000	98	101	90	81	73	70	67	65	88
	1400	0.500	100	103	95	85	79	78	75	73	92
1500	1.000	101	104	96	86	79	76	73	71	92	
1600	1.500	101	104	98	88	79	75	72	70	93	
10	600	0.125	83	77	67	65	62	61	58	51	69
	700	0.125	87	83	73	70	67	66	64	58	74
	700	0.250	86	82	71	67	64	62	60	53	72
	800	0.125	89	87	78	74	71	70	68	63	79
	800	0.250	89	86	77	72	69	67	65	60	77
	900	0.125	91	90	83	77	75	73	71	67	82
	900	0.250	91	90	82	76	73	71	69	65	81
	900	0.500	91	89	80	73	69	67	65	60	78
	1000	0.125	93	94	87	80	78	76	74	71	85
	1000	0.250	93	93	86	79	76	74	73	69	84
	1000	0.500	93	92	84	76	73	71	69	65	82
	1100	0.125	95	96	90	82	81	78	77	74	88
	1100	0.250	95	96	90	82	79	77	75	73	87
	1100	0.500	94	95	89	80	77	75	73	69	86
	1200	0.500	96	98	92	83	80	78	76	73	89
	1200	1.000	96	98	91	80	76	73	71	68	87
	1300	1.000	97	100	94	83	79	77	75	72	90
	1400	1.000	98	101	96	86	82	80	78	75	92
1400	1.500	98	101	97	85	79	76	74	71	92	
1500	1.500	100	103	99	88	82	79	77	74	94	
12	400	0.125	69	61	57	56	52	47	40	32	58
	500	0.125	78	71	65	64	62	59	53	46	67
	500	0.250	76	69	62	61	58	53	47	39	63
	600	0.125	84	78	71	70	68	66	62	55	74
	600	0.250	83	76	68	67	64	61	55	47	70
	700	0.125	87	83	77	74	73	71	68	62	79
	700	0.250	86	82	74	71	70	68	63	56	76
	700	0.500	85	80	71	68	67	63	57	50	72
	800	0.125	89	87	81	78	77	75	73	67	83
	800	0.250	89	86	80	76	75	73	69	63	81
	800	0.500	88	84	76	72	71	68	62	55	76
	900	0.125	92	91	85	81	80	79	76	72	86
	900	0.250	91	90	84	80	79	77	74	69	85
	900	0.500	90	89	82	76	75	73	69	62	81
	1000	0.125	93	94	89	84	83	81	80	76	89
	1000	0.250	93	94	88	83	82	80	78	73	88
	1000	0.500	92	93	86	80	79	77	74	68	85
	1000	1.000	91	91	84	77	75	73	68	62	82
1100	1.000	93	95	87	79	78	76	72	65	85	
1200	1.500	95	97	90	81	80	78	74	68	88	


The sound power level ratings shown are in decibels referred to 10-12 watts calculated per AMCA Standard 301. The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for outlet Lwo sound power levels for: Installation Type-B: free inlet, ducted outlet. Ratings include the effects of duct end connection. dBA levels are not licensed by AMCA International.

MODEL KSF Sound Power Data											
Model KSF	RPM	SP	Sound Power RE 10 ⁻¹² Watts Octive Bands, Hz								L _{wo} dB(A)
			63	125	250	500	1000	2000	4000	8000	
15	450	0.125	76	71	68	67	65	64	59	53	71
	550	0.125	83	78	74	74	70	70	66	60	77
	550	0.250	81	76	72	72	68	67	63	57	75
	650	0.125	88	83	78	78	75	74	71	66	81
	750	0.125	93	87	82	80	78	78	76	71	85
	750	0.250	92	87	81	80	77	77	75	69	84
	750	0.500	90	84	79	78	75	74	72	66	81
	850	0.125	95	91	86	83	82	81	79	75	88
	850	0.250	95	91	85	83	81	80	79	74	87
	850	0.500	93	90	84	82	80	79	77	72	86
	950	0.125	97	95	89	86	85	84	82	78	91
	950	0.250	97	94	89	86	85	83	82	77	91
	950	0.500	96	93	88	85	84	82	80	76	90
	950	1.000	94	90	84	82	80	78	76	70	86
	1050	0.125	99	98	92	89	88	86	85	81	94
	1050	0.250	99	97	92	88	88	85	84	81	93
	1050	0.500	98	97	91	88	87	84	83	79	93
	1050	1.000	96	94	88	85	85	82	80	76	90
1150	1.000	98	98	93	89	89	85	84	81	94	
1150	1.500	97	96	89	86	86	82	80	76	91	
18	400	0.125	77	71	66	64	64	61	55	48	68
	500	0.125	84	78	73	71	69	68	63	57	75
	500	0.250	83	77	72	69	68	66	61	53	73
	600	0.125	90	84	78	76	74	73	70	63	80
	600	0.250	89	83	77	75	73	72	68	61	79
	600	0.500	88	83	75	73	71	70	65	57	77
	700	0.125	94	89	83	80	78	78	75	68	84
	700	0.250	94	88	82	79	77	77	74	67	84
	700	0.500	93	88	81	77	75	75	72	64	82
	800	0.125	97	93	87	83	81	81	78	73	88
	800	0.250	96	93	87	83	81	80	78	72	87
	800	0.500	96	92	86	82	79	79	76	70	86
	900	0.125	99	97	91	87	84	83	82	77	91
	900	0.250	99	96	90	86	84	83	81	76	91
	900	0.500	98	96	90	85	83	82	80	74	90
	900	1.000	96	95	88	83	81	80	78	71	88
	1000	0.500	100	99	93	88	86	85	83	78	93
	1000	1.000	99	98	92	87	84	83	81	76	91
1000	1.500	99	99	92	85	83	81	80	74	90	
1100	1.500	100	101	95	88	86	84	83	78	93	

The sound power level ratings shown are in decibels referred to 10-12 watts calculated per AMCA Standard 301. The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for outlet Lwo sound power levels for: Installation Type-B: free inlet, ducted outlet. Ratings include the effects of duct end connection. dBA levels are not licensed by AMCA International.

MODEL SQB

SQUARE INLINE BELT DRIVE CENTRIFUGAL DUCT FAN

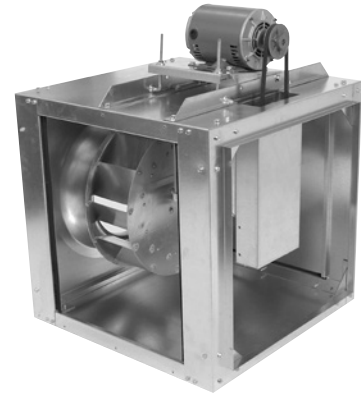

APPLICATION

Model SQB square inline duct mounted fans are available in sizes 7 through 24, moving from 100 to over 9,300 CFM, with static pressure capabilities to 1-1/2". SQB units are the perfect selection for clean air applications where space is a leading consideration. The compact housing with removable access doors and side discharge capability can be mounted in any orientation. AMCA licensed performance and UL listing assure that you've made a reliable selection.

CONSTRUCTION

Housing

- Heavy-gauge galvanized steel for extra strength.
- Integral inlet and outlet duct collars.
- Universal mounting - horizontal, vertical or any angle.
- Motor and drives out of the air stream.
- Easy access for service with removable side panels and drive and bearing covers without disconnecting duct.

Centrifugal Wheel


- All aluminum backward inclined wheel.
- Nonoverloading for safe operation in ducted systems.
- Statically and dynamically balanced for smooth operation.

Bearings

- Bearings designed for minimum 200,000 hour life.
- Bearings are double sealed and prelubricated with relube fittings.

DIMENSIONAL DATA

MODEL SQB	A	B	C	Average Ship Wt. Lbs.
7-8	15	23	11 7/8	75
10	17	23	13 7/8	85
12	21	23	17 7/8	95
15	24	28	21 7/8	140
18	28	30	23 7/8	190
20	32	34	27 7/8	220
24	39	38	34 7/8	320

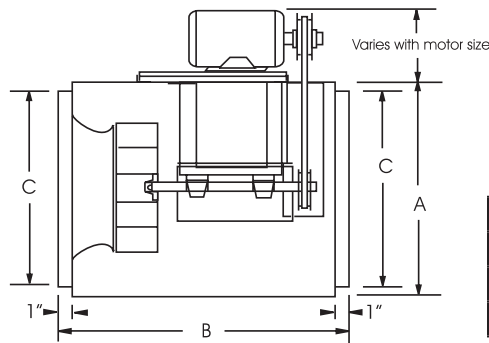

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
◆ 10 Day Shipment

Drives

- Sized for minimum 150% of drive horse power.
- Machined cast iron adjustable motor pulleys.
- Motor mount plate with integral belt tensioning device.
- Nonstatic v-belts.

Motors

- Single speed open drip-proof are standard.
- All motors are rated for continuous duty.
- Standard motors are permanently sealed ball bearing type.
- 182T and larger motors shipped unmounted for field installation.

AMCA SEAL



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models SQB shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



UL-705 LISTED POWER VENTILATOR

ACCESSORIES

MODEL SQB	GRAVITY DAMPER		DAMPER MOTOR (LOOSE)	MOTOR SAFETY GUARD	VIBRATION ISOLATORS HANGING STYLE		VIBRATION ISOLATORS FLOOR MOUNT	
	OD	STOCK NO.	STOCK NO.	STOCK NO.	RUBBER STOCK NO.	SPRING STOCK NO.	RUBBER STOCK NO.	SPRING STOCK NO.
7	12	411012 ●	411611 ●	MGSQB78 ●	VHRSQ06-15 ●	VHSSQ06-20 ●	VFRSQ06-15 ●	VFSSQ06-20 ●
8	12	411012 ●	411611 ●	MGSQB78 ●	VHRSQ06-15 ●	VHSSQ06-20 ●	VFRSQ06-15 ●	VFSSQ06-20 ●
10	14	411014 ●	411611 ●	MGSQB1012 ●	VHRSQ06-15 ●	VHSSQ06-20 ●	VFRSQ06-15 ●	VFSSQ06-20 ●
12	19	411018 ●	411611 ●	MGSQB1012 ●	VHRSQ06-15 ●	VHSSQ06-20 ●	VFRSQ06-15 ●	VFSSQ06-20 ●
15	22	411022 ●	411611 ●	MGSQB15 ●	VHRSQ06-15 ●	VHSSQ06-20 ●	VFRSQ06-15 ●	VFSSQ06-20 ●
18	24	411024 ●	411611 ●	MGSQB18 ●	VHRSQ18-20 ●	VHSSQ06-20 ●	VFRSQ18-20 ●	VFSSQ06-20 ●
20	28	411028 ●	411611 ●	MGSQB2024 ●	VHRSQ18-20 ●	VHSSQ06-20 ●	VFRSQ18-20 ●	VFSSQ06-20 ●
24	35	611035 ●	411611 ●	MGSQB2024 ●	VHRSQ24-30 ◆	VHSSQ24 ●	VFRSQ24-30 ◆	VFSSQ24-30 ●

(1) - MAXIMUM 3 HP MOTOR - FOR 5 HP MOTOR CONTACT FACTORY

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE DAMPER. DUE TO CONTINUING RESEARCH, JencOFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL SQB					Square Inline Belt Drive Centrifugal Duct Fan								Ventilator with Open Drip-proof Motor and Drive Assembly		
MODEL SQB	MOTOR Hp	MAX BHP	RPM	Sones @ 1/2 SP	CFM at Static Pressure								115/1/60*	208-230/460/3/60	
					1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	STOCK NO.	STOCK NO.	
7	1/4	0.06	1210	6.1	182	138	86	-	-	-	-	-	-	SQB07ML1S ●	SQB07ML3S ▲
		0.13	1530	9.1	249	217	182	144	-	-	-	-	-	-	-
	1/4	0.11	1450	8.4	233	199	161	118	-	-	-	-	-	SQB07MH1S ●	SQB07MH3S ▲
		0.26	1930	14.3	328	304	279	252	193	123	-	-	-	-	-
	1/3	0.18	1690	10.8	281	253	223	190	114	-	-	-	-	SQB07PH1S ●	SQB07PH3S ▲
0.34		2110	17.3	362	341	319	295	243	186	116	-	-	-	-	-
8	1/4	0.05	1050	4.8	453	345	-	-	-	-	-	-	-	SQB08ML1S ●	SQB08ML3S ▲
		0.17	1575	10.7	756	696	630	558	-	-	-	-	-	-	-
	1/4	0.13	1425	9.3	673	604	527	437	-	-	-	-	-	SQB08MH1S ●	SQB08MH3S ▲
		0.26	1800	13.8	880	829	774	715	583	-	-	-	-	-	-
	1/3	0.15	1500	9.9	715	651	579	500	-	-	-	-	-	SQB08PH1S ●	SQB08PH3S ▲
		0.37	2025	17.4	1001	957	910	860	753	627	-	-	-	-	-
	1/2	0.28	1850	14.6	907	858	805	748	623	-	-	-	-	SQB08QH1S ●	SQB08QH3S ●
0.55		2325	23.0	1160	1124	1084	1043	955	860	753	604	-	-	-	-
10	1/4	0.09	1050	5.1	798	687	540	-	-	-	-	-	-	SQB10MH1S ●	SQB10MH3S ▲
		0.26	1500	10.0	1219	1143	1068	988	787	-	-	-	-	-	-
	1/3	0.12	1175	6.6	917	821	712	557	-	-	-	-	-	SQB10PH1S ●	SQB10PH3S ▲
		0.34	1650	11.9	1356	1286	1216	1148	992	763	-	-	-	-	-
	1/2	0.23	1450	9.4	1173	1095	1016	932	702	-	-	-	-	SQB10QH1S ●	SQB10QH3S ●
		0.53	1900	16.0	1581	1520	1461	1401	1278	1139	957	-	-	-	-
	3/4	0.38	1700	12.7	1401	1334	1267	1200	1053	857	-	-	-	SQB10RH1S ●	SQB10RH3S ●
0.79		2175	21.0	1827	1773	1720	1669	1564	1456	1336	1194	-	-	-	-
12	1/4	0.12	900	5.4	1293	1098	769	-	-	-	-	-	-	SQB12MH1S ●	SQB12MH3S ▲
		0.26	1170	9.3	1773	1639	1491	1312	-	-	-	-	-	-	-
	1/3	0.18	1025	6.9	1518	1359	1165	806	-	-	-	-	-	SBQ12PH1S ●	SQB12PH3S ▲
		0.34	1275	11.3	1954	1833	1704	1558	1099	-	-	-	-	-	-
	1/2	0.23	1120	8.4	1686	1544	1384	1177	-	-	-	-	-	SQB12QH1S ●	SQB12QH3S ●
		0.53	1475	15.1	2296	2192	2085	1973	1710	1282	-	-	-	-	-
	3/4	0.39	1325	12.3	2040	1924	1801	1667	1297	-	-	-	-	SQB12RH1S ●	SQB12RH3S ●
		0.78	1675	18.4	2633	2543	2450	2356	2151	1906	1545	-	-	-	-
	1	0.59	1525	15.9	2380	2280	2178	2070	1827	1481	-	-	-	SQB12SH1S ●	SQB12SH3S ●
1.05		1850	22.0	2926	2844	2762	2678	2501	2306	2074	1751	-	-	-	-

MIXED FLOW/CENTRIFUGAL INLINE FANS

Performance certified is for installation Type B-free inlet, ducted outlet.
 Power ratings (BHP) do not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

The sound ratings shown are loudness values in fan sones at 5 feet (1.5m) in a hemispherical free field calculated per AMCA Standard 301. Installation Type A: free inlet hemispherical sone levels.

Performance at higher RPM for each horse power is standard for that unit. Reduced performance can be obtained down to the minimum shown at the lower RPM for each unit, by resetting the adjustable motor sheave.

*Tri-voltage (115-208-230) is standard on 3/4 through 1 1/2 Hp Single phase motors. Tri-voltage is available for the 1/2 Hp motors. Inquire for price and delivery.

MIXED FLOW/CENTRIFUGAL INLINE FANS

MODEL SQB					Square Inline Belt Drive Centrifugal Duct Fan								Ventilator with Open Drip-proof Motor and Drive Assembly					
MODEL SQB	MOTOR Hp	MAX BHP	RPM	Sones @ 1/2 SP	CFM at Static Pressure								115/160*	208-230/460/3/60				
					1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	STOCK NO.	STOCK NO.				
15	1/4	0.14	770	-	1611	1408	1135	-	-	-	-	-	-	-	-	SQB15MH1S ●	SQB15MH3S ▲	
		0.26	950	7.7	2071	1911	1745	1548	-	-	-	-	-	-	-	-	-	-
	1/3	0.17	825	-	1753	1567	1349	-	-	-	-	-	-	-	-	-	SQB15PH1S ●	SQB15PH3S ▲
		0.36	1060	10.2	2347	2203	2058	1904	1464	-	-	-	-	-	-	-	-	-
	1/2	0.29	990	8.6	2172	2018	1861	1684	-	-	-	-	-	-	-	-	SQB15QH1S ●	SQB15QH3S ●
		0.53	1205	13.5	2707	2577	2452	2324	2038	1576	-	-	-	-	-	-	-	-
	3/4	0.41	1105	11.1	2459	2320	2182	2038	1674	-	-	-	-	-	-	-	SQB15RH1S ●	SQB15RH3S ●
		0.78	1375	17.2	3124	3009	2897	2787	2559	2298	1925	-	-	-	-	-	-	-
	1	0.47	1160	12.4	2595	2462	2331	2197	1884	-	-	-	-	-	-	-	SQB15SH1S ●	SQB15SH3S ●
		1.08	1530	21	3502	3396	3295	3196	2996	2786	2545	2225	-	-	-	-	-	-
1 1/2	0.91	1445	18.8	3295	3184	3078	2973	2760	2526	2236	1585	-	-	-	-	SQB15TH1S ●	SQB15TH3S ●	
	1.57	1735	26	3999	3904	3813	3724	3549	3372	3187	2983	-	-	-	-	-	-	
18	1/3	0.24	700	5.9	2395	2155	1888	1443	-	-	-	-	-	-	-	SQB18PH1S ●	SQB18PH3S ▲	
		0.36	800	7.6	2803	2592	2378	2135	-	-	-	-	-	-	-	-	-	-
	1/2	0.24	700	5.9	2395	2155	1888	1443	-	-	-	-	-	-	-	-	SQB18QH1S ●	SQB18QH3S ●
		0.56	925	10.2	3306	3119	2938	2752	2301	-	-	-	-	-	-	-	-	-
	3/4	0.30	750	6.7	2600	2376	2141	1845	-	-	-	-	-	-	-	-	SQB18RH1S ●	SQB18RH3S ●
		0.76	1025	12.6	3704	3531	3367	3204	2851	2364	-	-	-	-	-	-	-	-
	1	0.43	850	8.5	3005	2805	2607	2393	1662	-	-	-	-	-	-	-	SQB18SH1S ●	SQB18SH3S ●
		1.07	1150	15.9	4198	4039	3890	3745	3450	3119	2673	-	-	-	-	-	-	-
	1 1/2	0.66	975	11.3	3505	3326	3154	2981	2589	1754	-	-	-	-	-	-	SQB18TH1S ●	SQB18TH3S ●
		1.55	1300	20.0	4786	4642	4507	4376	4120	3854	3562	3202	-	-	-	-	-	-
2	0.94	1100	14.6	4000	3837	3682	3531	3217	2846	2189	-	-	-	-	-	SQB18VH1S ▲	SQB18VH3S ●	
	2.04	1425	23.0	5275	5140	5014	4893	4657	4422	4176	3906	-	-	-	-	-	-	
20	1/3	0.29	575	5.5	3297	2923	2428	-	-	-	-	-	-	-	-	SQB20PH1S ●	SQB20PH3S ▲	
		0.35	610	5.6	3539	3195	2778	2028	-	-	-	-	-	-	-	-	-	-
	1/2	0.29	575	5.5	3297	2923	2428	-	-	-	-	-	-	-	-	-	SQB20QH1S ●	SQB20QH3S ●
		0.52	700	8.3	4151	3862	3546	3167	-	-	-	-	-	-	-	-	-	-
	3/4	0.33	600	6.3	3470	3118	2683	-	-	-	-	-	-	-	-	-	SQB20RH1S ●	SQB20RH3S ●
		0.78	800	11.6	4819	4571	4311	4028	3286	-	-	-	-	-	-	-	-	-
	1	0.42	650	6.7	3813	3496	3134	2646	-	-	-	-	-	-	-	-	SQB20SH1S ●	SQB20SH3S ●
		1.06	885	14.5	5380	5158	4929	4688	4134	3286	-	-	-	-	-	-	-	-
	1 1/2	0.89	835	12.9	5051	4814	4568	4305	3661	-	-	-	-	-	-	-	SQB20TH1S ●	SQB20TH3S ●
		1.57	1010	19.0	6199	6005	5809	5607	5173	4665	3963	-	-	-	-	-	-	-
2	0.97	860	13.7	5216	4987	4750	4498	3904	2801	-	-	-	-	-	-	SQB20VH1S ▲	SQB20VH3S ●	
	2.09	1110	23.0	6849	6673	6496	6315	5938	5523	5038	4388	-	-	-	-	-	-	
24	1/2	0.42	530	5.5	4426	3956	3416	2395	-	-	-	-	-	-	-	SQB24QH1S ●	SQB24QH3S ●	
		0.54	580	7.1	4928	4502	4049	3485	-	-	-	-	-	-	-	-	-	-
	3/4	0.42	530	5.5	4426	3956	3416	2395	-	-	-	-	-	-	-	-	SQB24RH1S ●	SQB24RH3S ●
		0.80	660	9.9	5720	5343	4966	4558	3307	-	-	-	-	-	-	-	-	-
	1	0.52	570	6.8	4828	4394	3928	3325	-	-	-	-	-	-	-	-	SQB24SH1S ●	SQB24SH3S ●
		1.07	725	12.6	6356	6010	5670	5319	4488	-	-	-	-	-	-	-	-	-
	1 1/2	0.80	660	9.9	5720	5343	4966	4558	3307	-	-	-	-	-	-	-	SQB24TH1S ●	SQB24TH3S ●
		1.59	830	17.2	7375	7066	6768	6471	5843	5076	-	-	-	-	-	-	-	-
	2	0.86	675	10.5	5867	5498	5131	4738	3653	-	-	-	-	-	-	-	SQB24VH1S ▲	SQB24VH3S ●
		2.11	910	21.0	8145	7859	7584	7314	6763	6156	5400	-	-	-	-	-	-	-
3	2.04	900	20.0	8049	7760	7483	7210	6650	6030	5237	-	-	-	-	-	-	-	
	3.10	1035	26.0	9340	9084	8838	8598	8122	7632	7101	6486	-	-	-	-	N/A	SQB24WH3S ●	

Performance certified is for installation Type B-free inlet, ducted outlet.
 Power ratings (BHP) do not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).


The sound ratings shown are loudness values in fan sonics at 5 feet (1.5m) in a hemispherical free field calculated per AMCA Standard 301. Installation Type A: free inlet hemispherical sone levels.

Performance at higher RPM for each horse power is standard for that unit. Reduced performance can be obtained down to the minimum shown at the lower RPM for each unit, by resetting the adjustable motor sheave.

*Tri-voltage (115-208-230) is standard on 3/4 through 1 1/2 Hp Single phase motors. Tri-voltage is available for the 1/2 Hp motors. Inquire for price and delivery.

MODEL SQD

SQUARE INLINE DIRECT DRIVE CENTRIFUGAL DUCT FAN



APPLICATION

Model SQD square inline duct mounted fans are available in sizes 6 through 15, moving up to 2,800 CFM, with static pressure capabilities to 1". SQD units are the perfect selection for clean air applications where space is a leading consideration. The compact housing with removable access doors and side discharge capability can be mounted in any orientation. AMCA licensed performance and UL listing assure that you have made a reliable selection.

CONSTRUCTION

Housing

- Heavy-gauge galvanized steel for extra strength.
- Integral inlet and outlet duct collars
- Universal mounting - horizontal, vertical or any angle.
- Easy access for service with removable side panels, without disconnecting duct.

Centrifugal Wheel

- All aluminum backward inclined wheel.
- Nonoverloading for safe operation in ducted systems.
- Statically and dynamically balanced for smooth operation.
- SQD 06 has composite wheel.

Motors

- Single speed totally enclosed are standard.
- All motors are rated for continuous duty.
- Standard motors are permanently sealed ball bearing type.
- SQD06 has an external rotor motor.

AMCA SEAL




JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models SQD shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



UL-705 LISTED POWER VENTILATOR

DIMENSIONAL DATA

MODEL SQD	A	B	C	Average Ship Wt. Lbs.
6	13	14	8 7/8	30
8	16	17	11 7/8	60
10	19	20	13 7/8	75
12	23	24	15 7/8	90
15	28	29	19 7/8	120

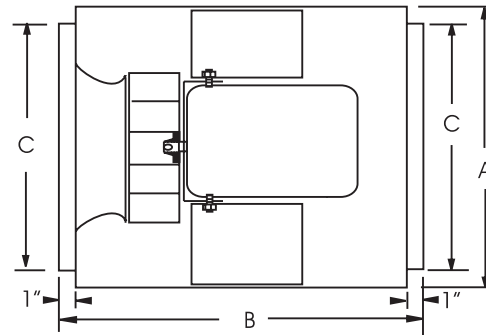

ACCESSORIES

MODEL SQD	DAMPER		DAMPER MOTOR (LOOSE)	VIBRATION ISOLATORS HANGING STYLE		VIBRATION ISOLATORS FLOOR MOUNT		SPEED CONTROL		
	OD	STOCK NO.	STOCK NO.	RUBBER STOCK NO.	SPRING STOCK NO.	RUBBER STOCK NO.	SPRING STOCK NO.	115/1/60		230/1/60
								5 AMP STOCK NO.	10 AMP STOCK NO.	STOCK NO.
6	9	411009 ●	411611 ●	VHRSQ06-15 ●	VHSSQ06-20 ●	VFRSQ06-15 ●	VFSSQ06-20 ●	2727.1 ●	N/A	N/A
8	12	411012 ●	411611 ●	VHRSQ06-15 ●	VHSSQ06-20 ●	VFRSQ06-15 ●	VFSSQ06-20 ●	2727.1 ●	N/A	3232.1 ◆
10	14	411014 ●	411611 ●	VHRSQ06-15 ●	VHSSQ06-20 ●	VFRSQ06-15 ●	VFSSQ06-20 ●	2727.1 ●	2828.1 ●	3232.1 ◆
12	16	411016 ●	411611 ●	VHRSQ06-15 ●	VHSSQ06-20 ●	VFRSQ06-15 ●	VFSSQ06-20 ●	2727.1 ●	2828.1 ●	3232.1 ◆
15	20	411020 ▲	411611 ▲	VHRSQ06-15 ▲	VHSSQ06-20 ▲	VFRSQ06-15 ▲	VFSSQ06-20 ▲	N/A	2828.1 ●	3232.1 ◆

SPEED CONTROL **2727.1 MAX 1/3 HP-5 AMP 120V**
2828.1 MAX 1/2 HP-10 AMP 120V

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
◆ 10 Day Shipment

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE DAMPER. DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MIXED FLOW/CENTRIFUGAL INLINE FANS

MIXED FLOW/CENTRIFUGAL INLINE FANS

MODEL SQD					Square Inline Direct Drive Centrifugal Duct Fan							Ventilator with Totally Enclosed Motor	
MODEL SQD	MOTOR Hp	MAX BHp	RPM	SONES @ 1/4 SP	CFM at Static Pressure							115/1/60*	208-230/1/60*
					1/8	1/4	3/8	1/2	5/8	3/4	1	STOCK NO.	STOCK NO.
60	100 WATT	.95 MAX AMPS @ 115/60/1	1250	2.2	162	102	-	-	-	-	-	SQD601AS ●	N/A
			1500	3.5	208	174	-	-	-	-	-		
			1850	5.4	269	245	215	170	130	-	-		
			2100	6.8	312	290	268	240	201	158	-		
			2400	8.6	362	343	324	304	281	250	176		
			2700*	10.4	406	389	372	355	337	316	257		
825	1/4	0.18	1050	3.8	398	276	-	-	-	-	-	SQD8251AS ●	SQD8251CS ◆
			1200	5.4	482	388	259	-	-	-	-		
			1400	7.2	588	514	427	313	-	-	-		
			1550	8.5	665	600	528	444	335	-	-		
			1740*	10.5	763	706	646	580	504	412	-		
1025	1/4	0.16	900	4.5	692	514	-	-	-	-	-	SQD10251AS ▲	SQD10251CS ◆
			1000	6.0	804	651	434	-	-	-	-		
			1050	6.8	858	714	547	-	-	-	-		
			1150*	8.3	964	836	698	473	-	-	-		
1050	1/2	0.38	1050	6.0	845	703	524	-	-	-	-	SQD10501AS ●	SQD10501CS ◆
			1200	8.1	1000	883	748	584	-	-	-		
			1350	10.1	1151	1050	940	815	667	-	-		
			1450	11.2	1250	1158	1058	949	826	680	-		
			1650	13.9	1445	1366	1283	1194	1098	993	740		
			1710*	14.7	1505	1430	1350	1266	1175	1078	852		
1225	1/4	0.19	900	6.0	1051	809	529	-	-	-	-	SQD12251AS ▲	SQD12251CS ◆
			1000	7.6	1216	1003	774	-	-	-	-		
			1050	8.4	1297	1096	883	640	-	-	-		
			1100	9.3	1377	1187	986	767	-	-	-		
			1120*	9.7	1410	1224	1028	817	-	-	-		
1250	1/2	0.55	950	6.4	1129	920	654	-	-	-	-	SQD12501AS ●	SQD12501CS ◆
			1050	7.8	1287	1106	890	651	-	-	-		
			1300	11.9	1673	1526	1380	1215	1020	825	-		
			1500	15.6	1975	1844	1719	1591	1451	1292	950		
			1620*	17.7	2159	2033	1918	1802	1680	1548	1237		
1550	1/2	0.51	700	6.1	1517	1174	793	-	-	-	-	SQD15501AS ▲	SQD15501CS ◆
			800	8.0	1839	1515	1233	833	-	-	-		
			900	10.2	2152	1849	1585	1335	994	-	-		
			1000	12.7	2456	2178	1924	1695	1469	1187	-		
			1060*	14.6	2658	2399	2151	1928	1719	1501	-		

* True motor speed - other speeds based on speed control use.

Performance certified is for installation Type B-free inlet, ducted outlet.
 Power ratings (BHP) do not include transmission losses.
 Performance ratings do not include the effects of appurtenances (accessories).

The sound ratings shown are loudness values in fan sones at 5 feet (1.5m) in a hemispherical free field calculated per AMCA Standard 301. Installation Type A: free inlet hemispherical sone levels.

Use 5 AMP Speed Control for motors 1/3 HP and smaller.
 Use 10 AMP Speed Control for motors 1/2.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL CFD

Belt Drive Forward Curved Inline Duct Blower



APPLICATION

JencoFan's Forward Curved Belt Driven Inline Duct Blowers are designed for supply, exhaust or ducted return applications. The CFD is an economical fan model designed to run quietly and efficiently in cooling, heating, and ventilating applications.

The CFD was designed with several features to make life easier for the user. These features include: removable access panels with handles, adjustable motor pulleys for easy field adjusting, tight seals, and hanging rod connections.

CONSTRUCTION

Housing

- Statically and dynamically balanced forward curved wheel
- 12-gauge galvanized steel blower plate/discharge opening
- 18-gauge galvanized steel housing
- Prepunched mounting holes
- Conduit opening for wiring from below unit


Motors

- Single speed open drip-proof are standard.
- All motors are rated for continuous duty.
- Standard motors are permanently sealed ball bearing type.

AMCA SEAL



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CFD shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

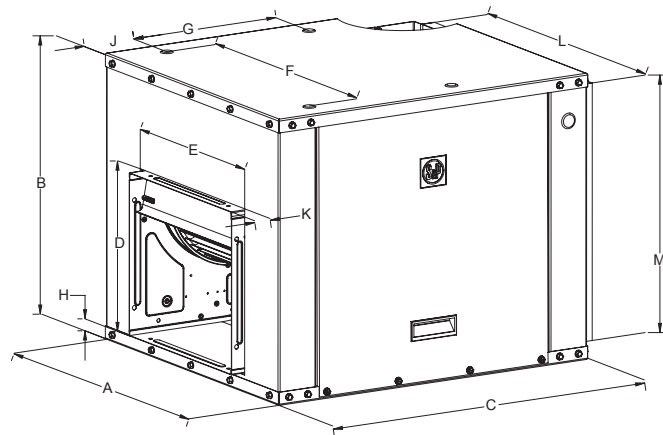

MIXED FLOW/CENTRIFUGAL INLINE FANS

DIMENSIONAL DATA

Model	A	B	C	D	E	F	G	H	J	K	L	M	Shaft (MM/IN)	WT (LBS)
7	18	15-3/8	23	8-1/4	9-1/4	14-1/2	9-5/8	1-1/4	1-1/4	7/8	15-7/8	13-3/8	20/.75	43
9	21	18	23	10-1/4	11-13/16	17-1/2	11-3/4	1-1/4	1-3/4	7/8	19	16	20/.75	55
10	22-1/4	20	24-3/4	11-1/4	13-1/8	18-3/4	13-3/8	1-1/4	1-3/4	7/8	20-1/4	18	20/.75	65
12	27	23	27-1/2	13-7/16	15-5/8	23-1/2	16-1/8	1-1/4	1-3/4	7/8	25	21	25/1	82
15	33-1/2	28	32	15-7/8	18-5/8	28	19-1/2	2-5/8	1-3/4	7/8	30-1/2	25	25/1	140

Metric Shafts have 'H' bushings installed to accommodate common pulleys

ACCESSORIES

MODEL CFD	INSULATED FILTER SECTION WITH 1" ALUMINUM MESH FILTER	FLOOR KIT WITHOUT ISOLATORS	VIBRATION ISOLATORS HANGING STYLE		VIBRATION ISOLATORS FLOOR MOUNT	
	STOCK NO.	STOCK NO.	RUBBER STOCK NO.	SPRING STOCK NO.	RUBBER STOCK NO.	SPRING STOCK NO.
7	CFD07FS ●	105195 ●	105200 ●	105199 ●	105197 ●	105196 ●
9	CFD09FS ●	105195 ●	105200 ●	105199 ●	105197 ●	105196 ●
10	CFD10FS ●	105195 ●	105200 ●	105199 ●	105197 ●	105196 ●
12	CFD12FS ●	105195 ●	105200 ●	105199 ●	105197 ●	105196 ●
15	CFD15FS ●	105195 ●	105200 ●	105199 ●	105197 ●	105196 ●

Ship Schedules:

- Next Day Shipment From Stock
- ▲ 3 Day Shipment From Stock
- ◆ 10 Day Shipment

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS.

DUE TO CONTINUING RESEARCH, JencOFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL CFD

Belt-Drive Forward Curved Inline Duct Blowers

Model CFD	Motor Hp	Max. BHP	Single Phase 115/208/230	Three Phase 208/230/460	CFM	RPM at Static Pressure								
			STOCK NO.	STOCK NO.		1/8	1/4	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2
7	1/4	0.26	CFD07ML1S ● (765-1039 RPM) CFD07MH1S ● (1000-1357 RPM)	CFD07ML3S ● (765-1039 RPM) CFD07MH3S ● (1000-1357 RPM)	200	-	-	856	980	1088	1184	1354	1502	1634
					300	-	-	872	1001	1114	1214	1391	1544	1682
					400	-	-	886	1013	1127	1230	1412	1571	1712
					500	-	783	912	1031	1141	1242	1425	1586	1731
					600	-	840	953	1061	1163	1260	1438	1598	1744
					700	801	907	1007	1104	1197	1287	1456	1612	1756
					800	885	981	1071	1158	1243	1325	1483	1632	1772
					900	972	1059	1141	1221	1298	1374	1520	1660	1793
	1000	1061	1141	1217	1290	1361	1430	1566	1697	1823				
	1/3	0.37	CFD07PL1S ● (1000-1357 RPM) CFD07PH1S ● (1256-1705 RPM)	CFD07PL3S ● (1000-1357 RPM) CFD07PH3S ● (1256-1705 RPM)	1100	1150	1225	1296	1363	1429	1494	1620	1742	1861
					1200	1241	1311	1377	1440	1502	1562	1679	1794	-
	1/2	0.53	CFD07QL1S ● (1113-1511 RPM) CFD07QH1S ● (1441-1955 RPM)	CFD07QL3S ● (1113-1511 RPM) CFD07QH3S ● (1441-1955 RPM)	1300	1333	1398	1460	1520	1577	1634	1744	-	-
					1400	1426	1487	1545	1601	1655	-	-	-	-
	3/4	0.77	CFD07RL1S ● (1166-1583 RPM) CFD07RH1S ● (1441-1955 RPM)	CFD07RL3S ● (1166-1583 RPM) CFD07RH3S ● (1441-1955 RPM)	1400	1426	1487	1545	1601	1655	-	-	-	-
1500					1519	1576	-	-	-	-	-	-	-	
9	1/4	0.25	CFD09ML1S ● (450-659 RPM) CFD09MH1S ● (583-800 RPM)	CFD09ML3S ● (450-659 RPM) CFD09MH3S ● (583-800 RPM)	400	455	-	-	-	-	-	-	-	-
					500	442	-	-	-	-	-	-	-	-
					600	455	-	-	-	-	-	-	-	-
					700	481	624	-	-	-	-	-	-	-
					800	513	634	-	-	-	-	-	-	-
					900	550	655	766	-	-	-	-	-	-
					1000	588	683	780	883	-	-	-	-	-
					1100	628	715	801	891	987	-	-	-	-
					1200	669	751	829	909	993	-	-	-	-
	1300	711	788	860	933	1008	1086	-	-	-				
	1/3	0.33	CFD09PL1S ● (450-659 RPM) CFD09PH1S ● (615-900 RPM)	CFD09PL3S ● (450-659 RPM) CFD09PH3S ● (615-900 RPM)	1400	753	826	894	962	1030	1100	1248	-	-
					1500	795	866	930	993	1056	1120	1254	-	-
	1/2	0.55	CFD09QL1S ● (750-959 RPM) CFD09QH1S ● (736-1025 RPM)	CFD09QL3S ● (750-959 RPM) CFD09QH3S ● (736-1025 RPM)	1600	838	906	968	1027	1086	1145	1267	-	-
					1700	881	947	1006	1063	1118	1173	1286	-	-
					1800	924	989	1046	1100	1152	1204	-	-	-
	3/4	0.77	CFD09RH1S ● (807-1125 RPM)	CFD09RH3S ● (807-1125 RPM)	1900	967	1031	1086	1138	1188	1237	-	-	
					2000	1010	1073	1127	1176	1225	-	-	-	
	1	1.09	CFD09SL1S ● (875-1101 RPM) CFD09SH1S ● (954-1300)	CFD09SL3S ● (875-1101 RPM) CFD09SH3S ● (954-1300)	2100	1054	1115	1167	-	-	-	-	-	-
2200					1098	1158	-	-	-	-	-	-		

Power ratings (BHP) do not include transmission losses.
 Performance certified is for installation type B-free inlet, ducted outlet.
 Performance ratings do not include the effects of appurtenances (accessories).
 575/3/60 ODP Motors are available for most motor HP's - Refer to Price List.

Table shows fan RPM needed for required CFM and SP.
 Shaded/Non-shaded area shows motor HP and stock number to order.

MODEL CFD

Belt-Drive Forward Curved Inline Duct Blowers

Model CFD	Motor Hp	Max. BHP	Single Phase 115/208/230	Three Phase 208/230/460	CFM	RPM at Static Pressure								
			STOCK NO.	STOCK NO.		1/8	1/4	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2
10	1/4	0.26	CFD10ML1S ● (361-551 RPM)	CFD10ML3S ● (361-551 RPM)	400	372	511	617	707	785	856	982	1093	1193
					500	380	520	627	716	795	866	992	1103	1204
					600	389	529	636	726	805	876	1003	1114	1214
					700	398	537	645	735	814	886	1012	1124	1224
					800	408	546	653	744	823	895	1022	1134	1234
					900	420	554	662	752	832	904	1031	1143	1244
			1000	435	563	670	761	841	913	1040	1153	1254		
			1100	452	574	679	769	849	921	1049	1162	1263		
			1200	470	585	688	777	857	930	1058	1171	1272		
			1300	491	598	697	786	866	938	1066	1179	-		
			1400	513	613	708	795	874	946	1075	1188	-		
			1500	536	629	720	805	883	955	1083	1196	-		
	1600	561	647	733	816	893	964	1091	1204	-				
	1700	586	666	748	828	903	973	1100	1213	-				
	1/3	0.35	CFD10PL1S ● (545-772 RPM)	CFD10PL3S ● (545-772 RPM)	1800	612	686	764	840	914	982	1108	1221	-
			CFD10PH1S ● (736-1043 RPM)	CFD10PH3S ● (736-1043 RPM)	1900	638	708	781	854	925	993	1117	1229	-
	1/2	0.54	CFD10QL1S ● (545-772 RPM)	CFD10QL3S ● (545-772 RPM)	2000	665	730	799	869	938	1004	1127	1238	-
			CFD10QH1S ● (736-1043 RPM)	CFD10QH3S ● (736-1043 RPM)	2100	692	754	819	886	952	1016	1137	-	-
					2200	720	778	839	903	966	1029	1147	-	-
	3/4	0.76	CFD10RL1S ● (608-862 RPM)	CFD10RL3S ● (608-862 RPM)	2300	747	802	861	921	982	1042	-	-	-
			CFD10RH1S ● (807-1144 RPM)	CFD10RH3S ● (807-1144 RPM)	2400	776	828	883	941	999	1057	-	-	-
					2500	804	853	906	961	1017	-	-	-	-
	1	1.15	CFD10SL1S ● (677-959 RPM)	CFD10SL3S ● (677-959 RPM)	2600	832	879	929	982	-	-	-	-	-
					2700	861	906	954	1004	-	-	-	-	-
			CFD10SH1S ● (942-1278 RPM)	CFD10SH3S ● (942-1278 RPM)	2800	889	933	-	-	-	-	-	-	-
					2900	918	-	-	-	-	-	-	-	-

MIXED FLOW/CENTRIFUGAL INLINE FANS

Power ratings (BHP) do not include transmission losses.
Performance certified is for installation type B-free inlet, ducted outlet.
Performance ratings do not include the effects of appurtenances (accessories).
575/3/60 ODP Motors are available for most motor HP's - Refer to Price List.

Table shows fan RPM needed for required CFM and SP.
Shaded/Non-shaded area shows motor HP and stock number to order.

MODEL CFD		Belt-Drive Forward Curved Inline Duct Blowers													
Model CFD	Motor Hp	Max. BHp	Single Phase 115/208/230	Three Phase 208/230/460	CFM	RPM at Static Pressure									
			STOCK NO.	STOCK NO.		1/8	1/4	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2	
12	1/4	0.27	CFD12ML1S ● (325-497 RPM)	CFD12ML3S ● (325-497 RPM)	800	343	475	573	654	724	787	896	992	1077	
					900	346	478	578	660	731	795	906	1003	1089	
					1000	351	481	582	666	738	802	915	1012	1100	
					1100	357	484	585	670	743	809	923	1021	1109	
					1200	365	487	588	674	748	814	929	1029	1118	
			1300	374	491	591	677	752	819	935	1036	1126			
			1400	384	495	594	680	755	823	941	1043	1134			
			1500	396	501	597	682	758	826	945	1048	1140			
			1600	408	508	601	685	761	829	949	1053	1146			
			1700	421	516	606	689	764	832	953	1058	1151			
	1800	435	525	612	692	767	835	956	1062	1156					
	1900	450	535	618	697	770	838	959	1065	1160					
	2000	465	545	625	702	774	841	962	1068	1164					
	1/3	0.35	CFD12PL1S ● (325-497 RPM)	CFD12PL3S ● (325-497 RPM)	2100	481	557	633	707	778	844	965	1071	1167	
					2200	496	569	642	714	783	848	967	1074	1171	
	1/2	0.55	CFD12QL1S ● (431-659 RPM)	CFD12QL3S ● (431-659 RPM)	2300	513	582	652	721	788	852	971	1077	1174	
					2400	529	595	662	729	794	857	974	1080	1177	
			CFD12QH1S ● (536-818 RPM)	CFD12QH3S ● (536-818 RPM)	2500	546	609	674	738	801	862	977	1083	1179	
					2600	563	624	685	747	808	868	981	1086	-	
	2700	580	638	698	757	817	875	986	1089	-					
	3/4	0.76	CFD12RL1S ● (512-725 RPM)	CFD12RL3S ● (512-725 RPM)	2800	597	653	710	768	825	882	991	1093	-	
					2900	615	669	724	779	835	890	996	-	-	
			CFD12RH1S ● (680-923 RPM)	CFD12RH3S ● (680-923 RPM)	3000	632	684	737	791	845	898	1002	-	-	
	1	1.15	CFD12SL1S ● (583-826 RPM)	CFD12SL3S ● (583-826 RPM)	3100	650	700	752	803	855	907	1009	-	-	
					3200	668	716	766	816	866	917	-	-	-	
			CFD12SH1S ● (790-1072 RPM)	CFD12SH3S ● (790-1072 RPM)	3300	685	733	781	829	878	927	-	-	-	
					3400	703	749	796	843	890	937	-	-	-	
					3500	721	766	811	857	902	-	-	-	-	
	1 1/2	1.67	CFD12TL1S ● (656-812 RPM)	CFD12TL3S ● (656-812 RPM)	3600	740	783	826	871	-	-	-	-	-	
					3700	758	800	842	885	-	-	-	-	-	
CFD12TM1S ● (813-1045 RPM)			CFD12TM3S ● (813-1045 RPM)	3800	776	817	858	-	-	-	-	-	-		
				3900	794	834	-	-	-	-	-	-	-		
				4000	813	-	-	-	-	-	-	-	-		

Power ratings (BHP) do not include transmission losses.
 Performance certified is for installation type B-free inlet, ducted outlet.
 Performance ratings do not include the effects of appurtenances (accessories).
 575/3/60 ODP Motors are available for most motor HP's - Refer to Price List.

Table shows fan RPM needed for required CFM and SP.
 Shaded/Non-shaded area shows motor HP and stock number to order.

MODEL CFD

Belt-Drive Forward Curved Inline Duct Blowers

Model CFD	Motor Hp	Max. BHP	Single Phase 115/208/230	Three Phase 208/230/460	CFM	RPM at Static Pressure											
			STOCK NO.	STOCK NO.		1/8	1/4	3/8	1/2	5/8	3/4	1	1 1/4	1 1/2			
15	1/4	0.26	CFD15MH1S ● (272-415 RPM)	CFD15MH3S ● (272-415 RPM)	1700	283	-	-	-	-	-	-	-	-	-		
					1800	289	-	-	-	-	-	-	-	-	-		
					1900	295	-	-	-	-	-	-	-	-	-	-	
					2000	302	-	-	-	-	-	-	-	-	-	-	
					2100	310	-	-	-	-	-	-	-	-	-	-	
					2200	318	-	-	-	-	-	-	-	-	-	-	
					2300	326	396	-	-	-	-	-	-	-	-	-	-
					2400	335	401	-	-	-	-	-	-	-	-	-	-
					2500	344	406	-	-	-	-	-	-	-	-	-	-
	1/3	0.34	CFD15PH1S ● (296-453 RPM)	CFD15PH3S ● (296-453 RPM)	2600	354	412	-	-	-	-	-	-	-	-		
					2700	363	418	-	-	-	-	-	-	-	-		
					2800	373	425	-	-	-	-	-	-	-	-		
	1/2	0.55	CFD15QL1S ● (296-453 RPM)	CFD15QL3S ● (296-453 RPM)	2900	383	433	489	549	-	-	-	-	-	-		
					3000	393	441	494	551	-	-	-	-	-			
					3100	403	449	499	554	-	-	-	-	-			
					3200	414	457	505	558	-	-	-	-	-			
					3300	424	466	512	562	615	-	-	-	-			
	3/4	0.78	CFD15RL1S ● (344-487 RPM)	CFD15RL3S ● (344-487 RPM)	3400	434	475	519	567	618	-	-	-	-			
					3500	445	484	526	572	621	672	-	-	-			
					3600	456	493	534	578	625	674	-	-	-			
					3700	466	502	542	584	629	676	-	-	-			
	1	1.15	CFD15RH1S ● (520-793)	CFD15RH3S ● (520-793)	3800	477	512	550	590	634	679	773	-	-			
					3900	488	522	558	597	639	683	774	-	-			
					4000	499	532	567	604	645	687	775	-	-			
					4100	510	541	575	612	651	691	777	-	-			
					4200	521	552	585	620	657	696	779	-	-			
	1 1/2	1.59	CFD15SH1S ● (456-646 RPM)	CFD15SH3S ● (456-646 RPM)	4300	532	562	594	628	664	701	781	-	-			
					4400	543	572	603	636	671	707	785	865	-			
					4500	554	582	612	644	678	713	788	867	-			
					4600	565	593	622	653	685	720	792	869	-			
					4700	576	603	632	662	693	726	796	871	-			
	2	2.16	CFD15TL1S ● (477-609)	CFD15TL3S ● (477-609)	4800	587	614	641	670	701	733	801	873	-			
					4900	599	624	651	679	709	740	806	876	-			
					5000	610	635	661	689	718	748	812	880	-			
					5100	621	645	671	698	726	755	818	884	-			
					5200	632	656	681	707	735	763	824	888	-			
	3	3.23	CFD15VH1S ● (617-789 RPM)	CFD15VH3S ● (617-789 RPM)	5300	644	667	691	717	744	771	830	893	-			
					5400	655	678	702	727	753	780	837	898	-			
					5500	666	689	712	736	762	788	844	-	-			
					5600	677	699	722	746	771	797	851	-	-			
	3	3.23	CFD15WL1S ● (520-793 RPM)	CFD15WL3S ● (520-793 RPM)	5700	689	710	733	756	780	805	-	-				
					5800	700	721	743	766	790	814	-	-				
5900					711	732	754	777	801	825	-	-					

MIXED FLOW/CENTRIFUGAL INLINE FANS

Power ratings (BHP) do not include transmission losses.
 Performance certified is for installation type B-free inlet, ducted outlet.
 Performance ratings do not include the effects of appurtenances (accessories).
 575/3/60 ODP Motors are available for most motor HP's - Refer to Price List.

Table shows fan RPM needed for required CFM and SP.
 Shaded/Non-shaded area shows motor HP and stock number to order.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL CFD Sound Data														
Model CFD	RPM	Sound Performance Sones (Inches w.g.)												
		0.125	0.25	0.375	0.5	0.625	0.75	1	1.25	1.5	1.75	2	2.25	2.5
7	500	2	-	-	-	-	-	-	-	-	-	-	-	-
	600	3.8	-	-	-	-	-	-	-	-	-	-	-	-
	700	5.5	4.3	-	-	-	-	-	-	-	-	-	-	-
	800	7.4	6.2	5.3	-	-	-	-	-	-	-	-	-	-
	900	11.3	8.2	7.2	6.5	-	-	-	-	-	-	-	-	-
	1000	11.7	10.4	9.3	8.5	7.9	-	-	-	-	-	-	-	-
	1100	13.7	12.9	11.7	10.8	10	9.4	-	-	-	-	-	-	-
	1200	27	15.9	14.3	13.3	12.5	11.8	-	-	-	-	-	-	-
	1300	31	19.9	16.8	15.6	14.8	14.1	13.3	-	-	-	-	-	-
	1400	34	24	19.2	18.2	17.3	16.5	15.7	-	-	-	-	-	-
	1500	37	28	23	21	20	19.2	18.1	17.6	-	-	-	-	-
	1600	39	32	27	23	23	22	21	20	19.6	-	-	-	-
	1700	42	35	31	27	26	25	24	23	22	22	-	-	-
	1800	43	38	34	31	29	28	27	26	25	24	24	-	-
	1900	45	41	38	35	33	32	30	29	28	27	27	26	26
2000	47	44	41	39	38	36	34	32	31	30	30	30	29	
2100	50	48	46	44	43	41	39	37	35	34	33	33	32	
2200	55	53	51	50	48	46	43	41	39	38	37	36	36	
9	400	4.4	-	-	-	-	-	-	-	-	-	-	-	-
	450	5.5	-	-	-	-	-	-	-	-	-	-	-	-
	500	6.8	-	-	-	-	-	-	-	-	-	-	-	-
	550	8.3	8.1	-	-	-	-	-	-	-	-	-	-	-
	600	10	9.4	-	-	-	-	-	-	-	-	-	-	-
	650	12.2	11.5	-	-	-	-	-	-	-	-	-	-	-
	700	14.4	13.8	13.4	-	-	-	-	-	-	-	-	-	-
	750	16.8	16.2	15.6	-	-	-	-	-	-	-	-	-	-
	800	19.1	18.6	18	17.8	-	-	-	-	-	-	-	-	-
	850	21	21	20	20	20	-	-	-	-	-	-	-	-
	900	24	23	23	23	22	-	-	-	-	-	-	-	-
	950	26	26	26	25	25	-	-	-	-	-	-	-	-
	1000	29	29	29	28	28	28	-	-	-	-	-	-	-
	1050	32	32	32	31	31	31	-	-	-	-	-	-	-
	1100	35	35	34	34	34	33	-	-	-	-	-	-	-
1150	37	37	37	36	36	36	36	-	-	-	-	-	-	
1200	40	40	39	39	39	39	38	-	-	-	-	-	-	
1250	43	43	42	42	42	41	41	41	-	-	-	-	-	
1300	47	46	46	45	45	44	44	43	-	-	-	-	-	

The sound ratings shown are in loudness values in fan sones at 1.5 m (5 ft) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for Installation type B: free inlet hemispherical sone levels.

MODEL CFD Power Data

Model CFD	RPM	Sound Performance Sones (Inches w.g.)												
		0.125	0.25	0.375	0.5	0.625	0.75	1	1.25	1.5	1.75	2	2.25	2.5
10	400	2.7	-	-	-	-	-	-	-	-	-	-	-	-
	450	4.4	-	-	-	-	-	-	-	-	-	-	-	-
	500	6	3.1	-	-	-	-	-	-	-	-	-	-	-
	550	7.6	4.8	-	-	-	-	-	-	-	-	-	-	-
	600	9.3	6.7	4.6	-	-	-	-	-	-	-	-	-	-
	650	11	8.8	6.2	-	-	-	-	-	-	-	-	-	-
	700	12.8	10.7	8	6.2	-	-	-	-	-	-	-	-	-
	750	14.4	12.5	10.2	7.8	6.9	-	-	-	-	-	-	-	-
	800	16.2	14.4	12.5	9.9	7.9	-	-	-	-	-	-	-	-
	850	18	16.4	14.5	12.2	9.9	8.6	-	-	-	-	-	-	-
	900	19.8	18.5	16.6	14.6	12.2	10.2	-	-	-	-	-	-	-
	950	22	21	18.8	17.1	14.7	12.5	-	-	-	-	-	-	-
	1000	24	23	21	19.3	17.3	15	11.5	-	-	-	-	-	-
	1050	26	25	23	21	20	17.6	13.8	-	-	-	-	-	-
	1100	28	27	25	24	22	20	16.2	13.7	-	-	-	-	-
	1150	30	29	28	26	25	23	18.9	15.7	-	-	-	-	-
	1200	32	31	30	29	27	26	22	18.3	16.2	-	-	-	-
	1250	34	33	32	31	29	28	25	21	18.1	-	-	-	-
1300	37	36	35	34	32	30	28	24	21	18.7	-	-	-	
1350	39	38	37	36	35	33	30	26	23	20	19.8	-	-	
1400	42	41	40	39	37	36	33	30	26	23	21	-	-	
1450	44	43	42	42	40	39	36	33	29	26	23	22	22	
1500	47	46	45	44	43	42	38	36	32	29	26	24	24	
1550	50	49	48	47	46	45	41	39	35	32	29	27	25	
1600	53	52	51	50	49	48	45	42	39	35	32	30	27	

The sound ratings shown are in loudness values in fan sones at 1.5 m (5 ft) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for Installation type B: free inlet hemispherical sone levels.

MODEL CFD Sound Data														
Model CFD	RPM	Sound Performance Sones (Inches w.g.)												
		0.125	0.25	0.375	0.5	0.625	0.75	1	1.25	1.5	1.75	2	2.25	2.5
12	400	3.9	-	-	-	-	-	-	-	-	-	-	-	-
	450	5.3	4	-	-	-	-	-	-	-	-	-	-	-
	500	6.8	5.4	4.4	-	-	-	-	-	-	-	-	-	-
	550	8.6	6.9	5.9	-	-	-	-	-	-	-	-	-	-
	600	10.5	8.6	7.4	6.6	-	-	-	-	-	-	-	-	-
	650	12.6	10.5	9.1	8.2	7.4	-	-	-	-	-	-	-	-
	700	14.7	12.6	11	9.9	9.2	8.4	-	-	-	-	-	-	-
	750	16.8	14.9	13	11.7	10.8	10	-	-	-	-	-	-	-
	800	18.9	17.2	15.2	13.7	12.6	11.7	10.2	-	-	-	-	-	-
	850	21	19.4	17.5	15.8	14.7	13.7	12	10.4	-	-	-	-	-
	900	23	22	19.9	18.2	16.8	15.8	14	12.5	-	-	-	-	-
	950	26	24	22	21	19.1	18	16.1	14.6	-	-	-	-	-
	1000	28	27	25	23	22	20	18.4	16.7	15.3	-	-	-	-
	1050	31	29	28	26	24	23	21	19	17.4	16.1	-	-	-
	1100	33	32	30	29	27	25	23	21	19.8	18.4	-	-	-
	1150	36	34	33	32	30	28	25	24	22	21	19.6	-	-
	1200	39	37	36	35	33	31	28	26	25	23	22	21	-
1250	42	41	39	38	36	34	31	29	27	26	24	23	22	
1300	45	44	42	41	40	38	34	32	30	28	27	26	25	
1350	49	47	46	44	43	41	38	35	33	31	30	28	27	
1400	52	51	49	48	47	45	41	39	36	34	33	31	30	
15	300	3.8	-	-	-	-	-	-	-	-	-	-	-	-
	350	5.5	-	-	-	-	-	-	-	-	-	-	-	-
	400	7.5	6.3	-	-	-	-	-	-	-	-	-	-	-
	450	9.6	8.3	-	-	-	-	-	-	-	-	-	-	-
	500	11.9	10.7	9.6	-	-	-	-	-	-	-	-	-	-
	550	14.3	13.2	12.1	11.3	-	-	-	-	-	-	-	-	-
	600	17	15.8	14.8	13.9	13.1	-	-	-	-	-	-	-	-
	650	19.5	18.4	17.4	16.5	15.6	-	-	-	-	-	-	-	-
	700	22	21	20	19.2	18.3	17.5	-	-	-	-	-	-	-
	750	25	24	23	22	21	20	18.7	-	-	-	-	-	-
	800	28	27	26	25	24	23	22	20	-	-	-	-	-
	850	31	30	29	28	27	26	25	23	-	-	-	-	-
	900	34	33	33	32	31	30	28	27	-	-	-	-	-
	950	38	37	36	35	35	34	32	31	-	-	-	-	-
	1000	42	41	40	40	39	38	36	35	-	-	-	-	-
	1050	47	46	45	44	43	42	41	39	-	-	-	-	-
	1100	51	50	50	49	48	47	46	44	-	-	-	-	-
1150	56	56	55	54	53	52	51	49	-	-	-	-	-	
1200	62	61	60	59	58	58	56	55	-	-	-	-	-	
1250	66	65	64	63	63	62	60	59	-	-	-	-	-	
1300	70	69	69	68	67	66	65	63	-	-	-	-	-	

The sound ratings shown are in loudness values in fan sones at 1.5 m (5 ft) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for Installation type B: free inlet hemispherical sone levels.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL TRC

TOTAL RECOVERY FOR ALL CLIMATES

COMMERCIAL APPLICATIONS

JencoFan's TRCs moderate extremes in both temperature and humidity, creating a comfortable indoor environment. The unique moisture transfer capability of the JencoFan core also eliminates condensation and frost build up in most applications. No mechanical or electrical defrost systems are needed, which means higher heat recovery efficiencies, easier installation and more reliable operation.

Standard Specifications and Features

- AHRI certified performance data for efficiency and cross leakage.
- UL tested flammability and smoke generation that meets NFPA 90A and 90B test standards for commercial applications.
- Easy installation and service.
- Easiest maintenance of any ERV
- MERV-8 filters (2 in the TRC500 & TRC800, 4 in the TRC1600)
- Non-Fused disconnect
- Transformer/relay package allowing simple on/off control
- Access doors for easy access to blowers, core and filters
- TRC500 & TRC800 have integral mounting flange and hanging bracket system
- TRC1600 has mounting feet for installation at floor level
- 2 Direct Drive, TEFC, Premium Efficient blower motors in the TRC500 and TRC800
- 2 Belt Drive, TEFC, Premium Efficient blower motors in the TRC1600
- Fully insulated case
- Large cores for high efficiency
- No condensate pan or drain required
- **10-year** industry best core warranty
- 2-year warranty on balance of unit



RECOVERY VENTILATORS

TRC Controls

Stock No.	Control	Description
STC7D-W ●	Digital Time Clock - Wall Mount	<ul style="list-style-type: none"> • Up to 8 on/off cycles per day or 56 per week • 24 VAC power requirement • Battery back-up • Fits any 4" x 4" electrical box
SMC-C ●	Motion (Occupancy) Control - Ceiling Mount	<ul style="list-style-type: none"> • Passive infrared sensor • Adjustable time-off delay to 30 minutes • 24 VAC power requirement • Covers up to 1500 sq. ft. floor space <i>walking motion coverage up to 22 foot radius</i>
SCO2-W ●	Carbon Dioxide Control - Wall Mount	<ul style="list-style-type: none"> • Adjustable control from 600-2000 PPM • Digital display • 24 VAC power requirement • Computer/BAS interface for information and control • Self calibrates during periods of low occupancy

These controls are intended to turn JencoFan commercial energy recovery ventilation systems on and off at appropriate times. Specification, installation and set-up is an easy process. The TRC units come standard with a 24 volt transformer/relay package for easy interface with all controls.

It is not necessary that JencoFan controls be used to operate JencoFan units. A wide range of controls or building automation systems may be used. Additionally, TRC800 units are "VFD Ready" as a standard feature.

The JencoFan residential (TR) units have their own line of compatible controls that are not intended to operate JencoFan commercial (TRC) units.

Ship Schedules:
● Next Day Shipment From Stock

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

Model TRC500



Performance

Airflow CFM	ESP in H ₂ O	Watts	Temp EFF%	Total EFF% Winter/Summer*
225	1.25	335	81	76/66
338	1.00	420	77	71/61
380	0.90	470	75	69/59
450	0.65	550	73	66/56
540	0.25	640	70	62/52
575	0.00	690	69	61/51
600	-0.25	735	68	60/50

* At AHRI 1060 standard conditions
(see certified data in full TR/TRC brochure for core components.)
Note: Watts is for the entire unit.

RECOVERY VENTILATORS

Specifications


Ventilation Type: Static Plate, Heat and Humidity Transfer						
Typical Airflow Range: 200-540 CFM						
AHRI 1060 Certified Core: One L85						
Airflow Rating Points (for AHRI): 450 CFM and 338 CFM						
Motors: One, 0.6 hp (Single Phase)						
V	Hz	Phase	FLA	Min. Cir. Amps	Max. Overcurrent Protection Device	Stock No.
115	60	Single	7.0	8.8	15	TRC500-115 ●
208-230	60	Single	3.5	4.4	15	TRC500-230 ●
Standard Features: Non-Fused Disconnect 24 VAC Transformer/Relay Package						
Filters: Two total, MERV 8, 2" pleated, 14" x 20" nominal size						
Weight: 141 lbs (unit), 160 lbs (in carton) 200 lbs (on pallet), up to 3 units on 40 lb pallet						
Shipping Dimensions: 48" L x 41" W x 18" H (in carton) 55" L x 42" W x 22" H (on pallet)						



Ship Schedules:
● Next Day Shipment From Stock

EA: Exhaust Air to outdoors
OA: Outdoor Air intake
RA: Room Air to be exhausted
FA: Fresh Air to inside

DIMENSIONAL DATA

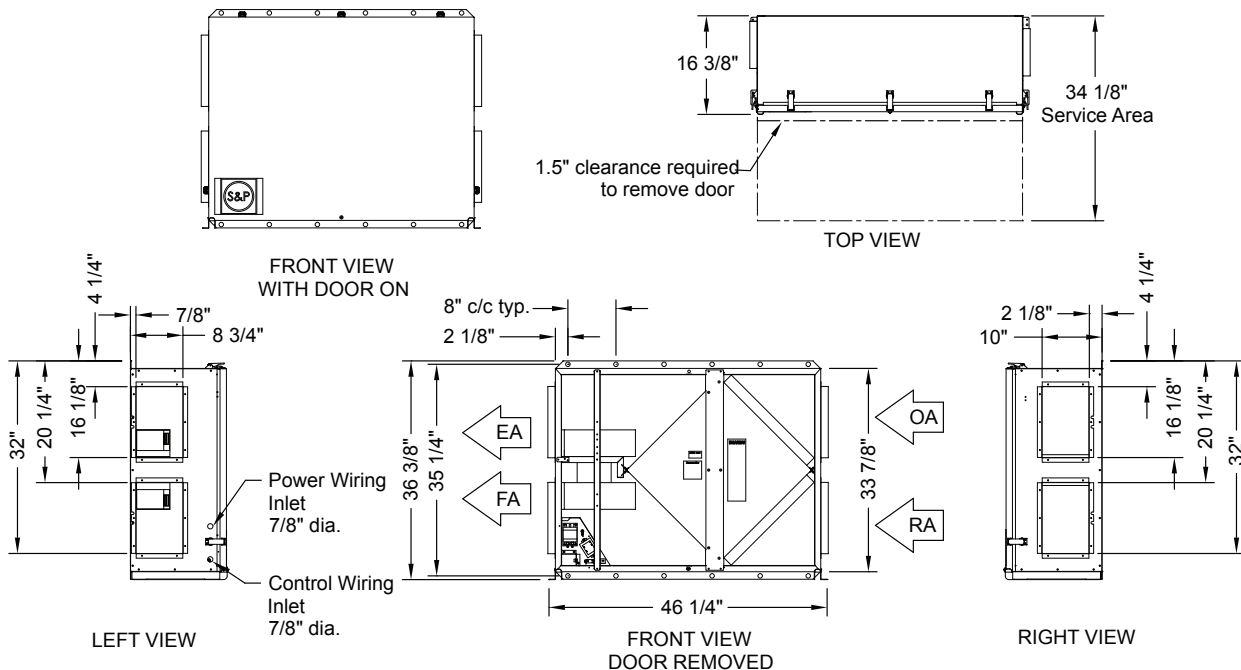


Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

Model TRC800



Performance

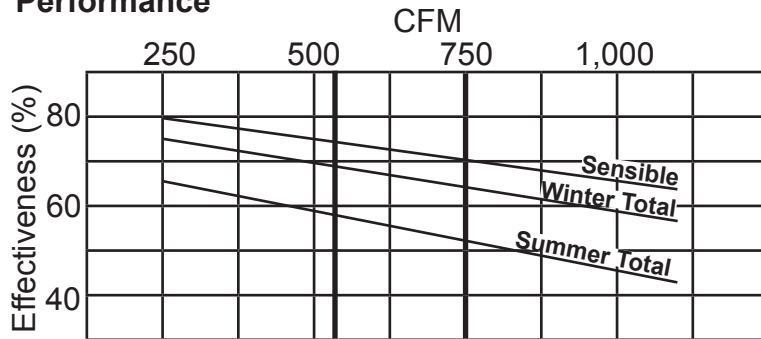

* At AHRI 1060 standard conditions
(see certified data in full TR/TRC brochure for core components.)

Specifications

Ventilation Type: Static Plate, Heat and Humidity Transfer						
Typical Airflow Range: 250-925 CFM						
AHRI 1060 Certified Core: One L125-00						
Airflow Rating Points (for AHRI): 750 CFM and 563 CFM						
Number Motors: Two direct drive blower/motor packages						
V	Hz	Phase	FLA (per motor)	Min. Cir. Amps	Max. Overcurrent Protection Device	Stock No.
115	60	Single	9.0	20.3	25	TRC800-115 ●
208-230	60	Single	4.5	10.1	15	TRC800-230 ●
Standard Features: Non-Fused Disconnect 24 VAC Transformer/Relay Package						
Filters: Two total, MERV 8, 2" pleated, 20" x 20" nominal size						
Weight: 211 lbs (unit), 300 lbs (shipping weight, on pallet)						
Shipping Dimensions: 62" L x 48" W x 40" H						



Ship Schedules:
● Next Day Shipment From Stock


RECOVERY VENTILATORS

Airflow Performance

Motor HP Phase	External Static Pressure (Inches Water Column)						
	0.0	0.25	0.5	0.75	0.9	1.25	1.5
0.75	970 CFM	925 CFM	860 CFM	795 CFM	750 CFM	635 CFM	480 CFM
Single Phase	1,490 Watts	1,375 Watts	1,270 Watts	1,160 Watts	1,090 Watts	950 Watts	825 Watts


Note: Watts is for the entire unit (two motors).

DIMENSIONAL DATA

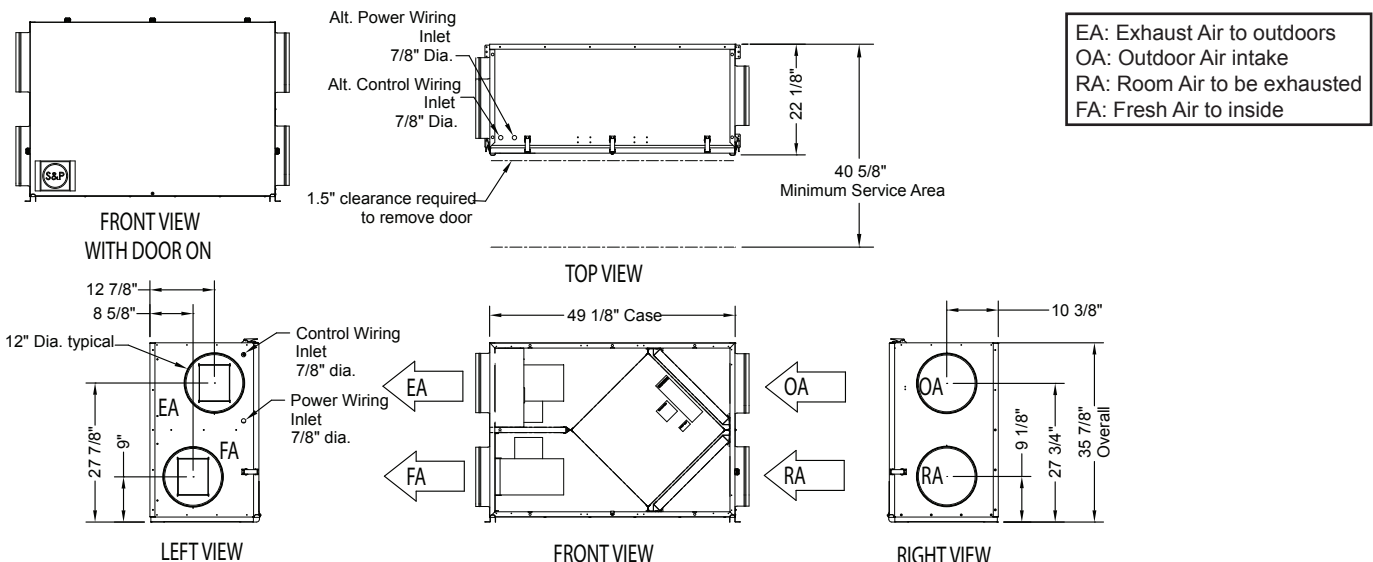


Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

Model TRC1600

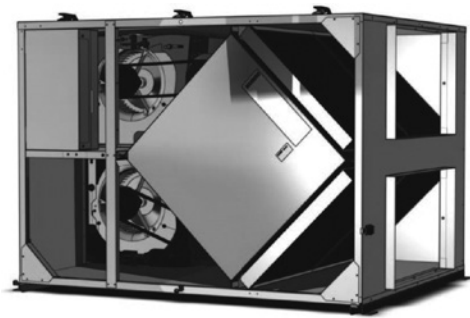

Performance

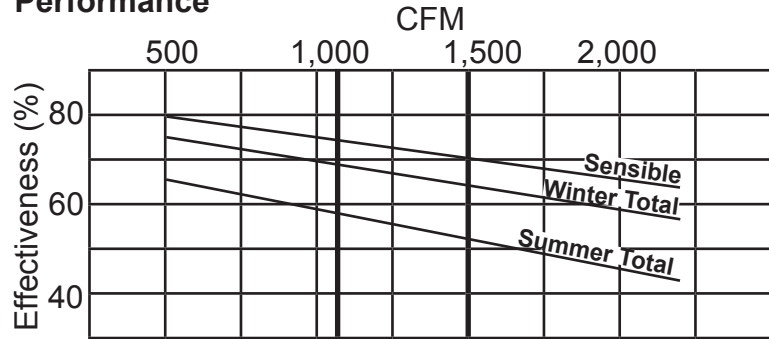

* At AHRI 1060 standard conditions

RECOVERY VENTILATORS

Specifications

Ventilation Type: Static Plate, Heat and Humidity Transfer							
Typical Airflow Range: 500-2,025 CFM							
AHRI 1060 Certified Core: Two L125-00							
Airflow Rating Points (for AHRI): 1,500 CFM and 1,126 CFM							
Number Motors: Two belt drive blower/motor packages with adjustable sheaves							
Drive HP	V	Hz	Phase	FLA (per motor)	Min. Cir. Amps	Max. Overcurrent Protection Device	Stock No.
1.5	115	60	Single	15.2	34.2	45	TRC1600-115 ●
	208-230	60	Single	8.2-7.6	18.5	25	TRC1600-230 ●
	208-230	60	Three	4.6-4.8	10.8	15	TRC1600-230-3P ●
	460	60	Three	2.4	5.4	15	TRC1600-460-3P ●
Standard Features: Totally Enclosed Premium Efficiency Motors Motor Starters, Non-fused Disconnect 24 VAC Transformer/Relay Package							
Filters: Four total, MERV 8, 2" pleated, 20" x 20" nominal size							
Weight: 414 lbs (unit), 505 lbs (shipping weight, on pallet)							
Shipping Dimensions: 72" L x 48" W x 40" H							




Ship Schedules:
● Next Day Shipment From Stock

Airflow Performance

Motor HP	Blower RPM	Turns Open	External Static Pressure (in w.g.)													
			0.0		0.25		0.5		0.75		0.9		1.25		1.5	
			SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP	SCFM	BHP
1.5	1148	4	1592	0.7	1480	0.7	1320	0.6	1120	0.5	800	0.4	-	-	-	-
	1304	2	1809	1.0	1720	1.0	1600	0.9	1410	0.8	1250	0.7	975	0.6	630	0.4
	1460	0	2025	1.5	1950	1.4	1845	1.3	1715	1.2	1540	1.1	1400	1.0	1165	0.8

DIMENSIONAL DATA

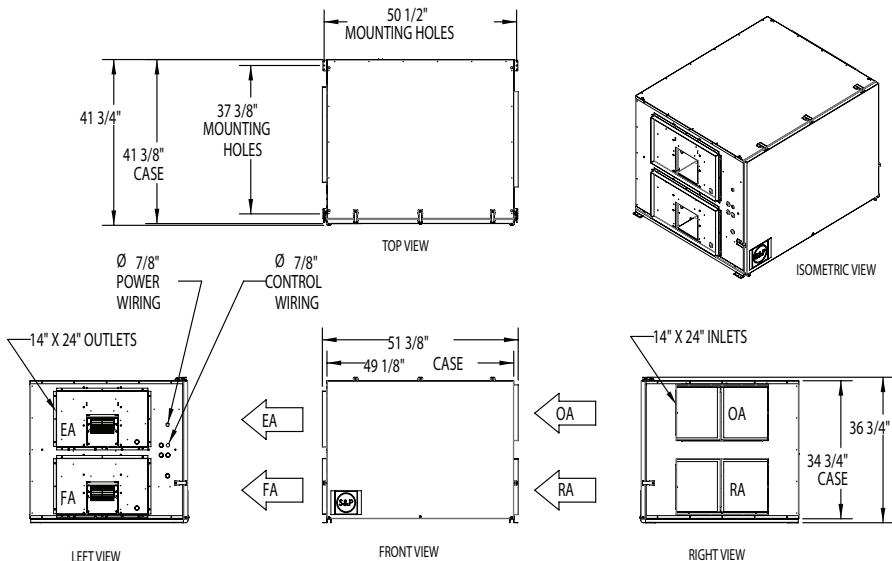

EA: Exhaust Air to outdoors
 OA: Outdoor Air intake
 RA: Room Air to be exhausted
 FA: Fresh Air to inside

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL ARE/ARS

DOME DIRECT DRIVE PROPELLER EXHAUST/SUPPLY ROOF FAN



APPLICATION

The ARE/ARS series offers powerful axial exhaust or supply performance in a roof mount design that is compact, lightweight and easy to install.

The ARE/ARS series is an excellent choice for factories, shops, restaurants, bathrooms, offices, schools and other similar applications where light to moderate static pressures are present.

The low contour designs and all aluminum housing provides a modern, clean appearance in addition to excellent performance and durability. The direct drive design has no belts or fan bearings to maintain or adjust and consequently requires very little maintenance.

CONSTRUCTION

Housing

- Heavy-gauge all aluminum housing.
- Exclusive U-Spring suspension compensates for both radial and lateral movement and provides 44% better vibration isolation than rubber isolators.
- External wiring chase for easy connection.
- Quick access to motor compartment for easy maintenance.

Propeller

- Attaches directly to motor shaft for maximum efficiency.
- Precision pitched, heavy-gauge aluminum blades with steel hub. Blades are designed for specific exhaust or supply requirements.

Speed Controllable Motor

- Standard motors are single speed, speed controllable and drip-proof.
- All motors are rated for continuous duty.
- Disconnect is standard on ODP motors.
- Motors are shipped assembled with factory test run assurance.

DIMENSIONAL DATA

MODEL ARE/ARS	A	B	C	D	E	F	Average Ship Wt. Lbs.
10	21	13	7	2	20	12 3/4	25
12	28	16	8	3	24	15 3/4	42
16	32	18	8 1/2	3	28	19 3/4	55
20	36	20	9 3/4	3	32	23 3/4	75

ACCESSORIES

Solid State Speed Control:


Is matched to the motor and blower wheel to allow continuous reduction in performance allowing adjustments of airflow for system balancing. CFM is reduced in direct proportion to motor speed reduction. Speed control is only available for single phase. Exhauster performance can be controlled from the ventilated area.



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models ARE & ARS shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



LISTED POWER ROOF VENTILATOR
UL STANDARD 705

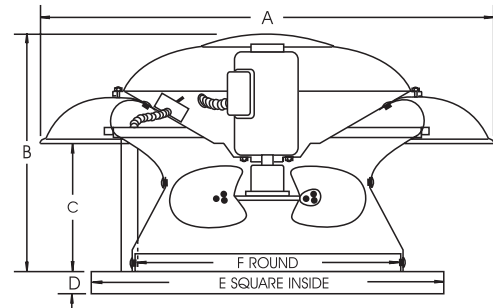

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
◆ 10 Day Shipment

ACCESSORIES

MODEL ARE/ARS	RECOMMENDED 12" MOUNTING CURB		DAMPER ARE/ARS		DAMPER MOTOR ARE/ARS(LOOSE)	115 VOLT SPEED CONTROL	230 VOLT SPEED CONTROL
	OD	STOCK NO.	OD	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
10	18 1/2	711218 ●	14	411014 / S3GA12CB ●	411611 / MP2781 ●	2727.1 ●	3232.1 ◆
12	22 1/2	611222 ●	18	411018 / S3GA16CB ●	411611 / MP2781 ●	2727.1 ●	3232.1 ◆
16	26 1/2	92612221 ●	22	411022 / S3GA20CB ●	411611 / MP2781 ●	2727.1 ●	3232.1 ◆
20	30 1/2	93012221 ◆	26	411026 / S3GA24CB ◆	411611 / MP2781 ◆	2727.1 ◆	3232.1 ◆

SPEED CONTROL 2727.1 MAX 1/3 HP-5 AMP 120V

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, JencOFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

PROPELLER ROOF VENTILATORS

MODEL ARE					Dome Direct Drive Propeller Exhaust Roof Fan								Ventilator with Open Drip-proof Motor	
MODEL ARE	MOTOR Hp	MAX BHp	RPM	SONES @ 0 SP	CFM at Static Pressure								115/1/60	208-230/1/60
					0	1/10	1/8	1/4	3/8	1/2	5/8	3/4	STOCK NO.	STOCK NO.
10	1/15	0.15	930	1.6	336	167	147	22	-	-	-	-	ARE10IH1AS ●	N/A
			1230	3.0	445	299	270	175	81	-	-	-		
			1550	5.0	561	463	425	298	228	165	85	-		
12	1/4	0.15	685	2.1	713	363	297	-	-	-	-	-	ARE12MM1AS ◆	ARE12MM1CS ◆
			940	4.1	979	787	697	381	163	-	-	-		
			1140	5.9	1187	1056	1007	657	453	269	102	-		
	1/4	0.30	1030	4.6	1077	931	868	513	318	143	-	-	ARE12MH1AS ●	ARE12MH1CS ◆
			1375	7.6	1438	1344	1316	1095	799	612	470	342		
			1725	11.2	1804	1728	1708	1596	1410	1154	931	781		
16	1/4	0.19	685	2.8	1047	661	564	253	-	-	-	-	ARE16MM1AS ◆	ARE16MM1CS ◆
			940	5.4	1436	1208	1126	738	496	305	122	-		
			1140	7.5	1742	1572	1518	1173	881	674	498	327		
	1/3	0.41	1030	5.3	1551	1357	1287	899	648	460	-	-	ARE16PH1AS ●	ARE16PH1CS ◆
			1375	8.4	2071	1940	1903	1655	1345	1104	920	767		
			1725	12.1	2598	2495	2470	2301	2111	1824	1539	1334		
20	1/4	0.42	685	5.8	1781	1372	1248	704	317	-	-	-	ARE20MM1AS ◆	ARE20MM1CS ◆
			940	9.8	2444	2183	2110	1656	1222	893	606	348		
			1140	13.4	2855	2617	2546	2183	1780	1417	1126	865		

Performance certified is for installation type A – free inlet, free outlet.
 The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for: installation Type A: free inlet hemispherical sone levels.

Use 5 AMP Speed Control for motors 1/3 HP and smaller.

MODEL ARS					Dome Direct Drive Propeller Supply Roof Fan								Ventilator with Open Drip-proof Motor	
MODEL ARS	MOTOR Hp	MAX BHp	RPM	SONES @ 0 SP	CFM at Static Pressure								115/1/60	208-230/1/60
					0	1/10	1/8	1/4	3/8	1/2	5/8	3/4	STOCK NO.	STOCK NO.
10	1/15	0.17	1230	4.8	454	308	271	71	-	-	-	-	ARS10IH1AS ◆	N/A
			1390	6.1	513	384	352	182	-	-	-	-		
			1550	7.7	572	457	428	280	119	-	-	-		
12	1/4	0.09	820	4.5	678	379	308	-	-	-	-	-	ARS12MM1AS ◆	ARS12MM1CS ◆
			940	5.8	777	526	452	-	-	-	-	-		
			1140	8.0	942	760	695	412	-	-	-	-		
	1/4	0.26	1030	7.1	853	653	576	283	-	-	-	-	ARS12MH1AS ◆	ARS12MH1CS ◆
			1375	11.8	1138	1020	979	709	487	287	-	-		
			1725	16.4	1428	1341	1316	1146	921	728	565	260		
16	1/4	0.21	820	7.8	1253	1000	916	552	-	-	-	-	ARS16MM1AS ◆	ARS16MM1CS ◆
			940	9.8	1436	1233	1164	817	526	-	-	-		
			1140	13.7	1742	1589	1541	1253	976	691	-	-		
	1/3	0.37	1030	9.2	1289	1013	944	655	-	-	-	-	ARS16PH1AS ◆	ARS16PH1CS ◆
			1375	15.5	1720	1574	1493	1205	965	807	-	-		
			1725	23	2158	2070	2036	1753	1542	1333	1148	918		
20	1/4	0.30	685	7.9	1631	1150	1018	-	-	-	-	-	ARS20MM1AS ◆	ARS20MM1CS ◆
			940	13.3	2239	1907	1816	1341	809	-	-	-		
			1140	18.2	2654	2370	2282	1843	1359	-	-	-		

Performance certified is for installation type A – free inlet, free outlet.
 The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for: installation Type A: free inlet hemispherical sone levels.

Use 5 AMP Speed Control for motors 1/3 HP and smaller.

MODEL CSTR SHUTTER FANS



FEATURE AND BENEFITS

- Totally assembled
- Motor is totally enclosed maintenance free, high efficiency, sealed ball bearings and UL/ULC certified
- Corrosion resistant aluminum shutter with tie bar to reduce shutter flapping and opening on windy days
- One year limited warranty
- Safety chrome grille on intake side meets OSHA standards. Fan must be mounted 7' above ground level on the exhaust side



MODEL (STOCK #)	SIZE	SPD	HP	RPM	HZ	Ph	CFM at Static Pressure				CFM per WATT @.0 SP
							.0	.05	.10	.20	
							Hi/Lo	Hi/Lo	Hi/Lo	Hi/Lo	
CSTR-16 ●	16	VAR	1/10	1725	60	1	2100/735	1995/700	1890/660	1575/550	15/13
CSTR-20 ●	20	VAR	1/3	1725	60	1	5000/1750	4750/1665	4500/1575	3750/1315	18/14

MODEL	VOLTS	AMPS Hi/Lo	DRIVE	BLADE	CORD	WT./ LBS.	LxWxH
CSTR-16	115/230	1.0/0.05	DD	3-Alum	No	25.75	20 x 20 x 13"
CSTR-20	115/230	3.5/1.7	DD	3-Alum	No	35.94	24 x 24 x 13"

FAN SIZE	ROUGH OPENING SIZE	RECOMMENDED INLET SIZE (SQ. FT.)
16	16.5" x 16.5"	2.75
20	20.5" x 20.5"	4.0

Ship Schedules:
● Next Day Shipment From Stock

PROPELLER WALL/DUCT FANS


ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS.

DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL GED

SIDEWALL DIRECT DRIVE PROPELLER EXHAUST FAN

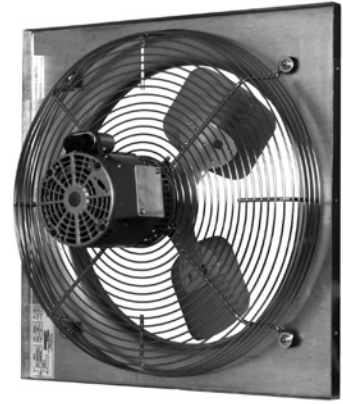

APPLICATION

GED wall propeller fans feature the maximum efficiency, low maintenance and durable, economical operation resulting from the direct drive design. It is available in exhaust configurations to provide general ventilation for a wide variety of buildings and enclosed areas within buildings. Examples include factories, assembly plants, churches, gymnasiums, garages, jails, machine rooms and many others.

They feature extremely quiet operation and an integral motor side guard as standard.

CONSTRUCTION

Panel Assembly

- 16 gauge galvanized steel.
- One piece spun venturi for maximum efficiency.
- Prepunched mounting holes for easy installation.
- Formed flanges for added rigidity.
- Integral OSHA approved motor side guard.

Propeller

- Attached directly to motor shaft for maximum efficiency.
- Precision pitched, fabricated aluminum blades (3 & 4 blade models).
- Polypropylene blades (6 blade models).
- Statically and dynamically balanced.

Motors

- Permanently lubricated sealed ball bearing type.
- Sleeve bearings on low HP models.
- Open drip-proof construction is standard.

Entire Fan Unit

- Suitable for all angle installation.
- Completely assembled and factory tested prior to shipment.



UL STANDARD 705



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models GED shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.


PROPELLER WALL/DUCT FANS

DIMENSIONAL DATA


MODEL GED	DIMENSIONS (IN.)						Average Ship Wt. Lbs.
	A	B	C	D	E*	F*	
10	16	10-1/2	1	2	11	9	30
12	16	12-1/2	1	2	14	12	30
14	20	14-1/2	1	2	14	12	34
16	20	16-1/2	1	2	14	12	37
18	24	18-1/2	1	2	15	13	45
20	24	20-1/2	1	2	15	13	50

- A. Outside dimension of square panel. D. Depth of venturi, 2" for all models.
 B. Diameter of venturi. E. Depth of fan (exhaust).
 C. Width of flange, 1" for all models. F. Depth of fan (supply).

*Varies with motor selection.



REAR VIEW

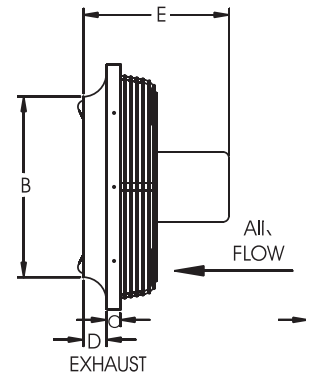

EXHAUST

ACCESSORIES

MODEL GED	GRAVITY DAMPER	DAMPER MOTOR (LOOSE)	115 VOLT SPEED CONTROL	
	STOCK NO.	STOCK NO.	5 AMP STOCK NO.	10 AMP STOCK NO.
10	EAS12 ●	EAS1232MTR ●	2727.1 ●	N/A
12	EAS12 ●	EAS1232MTR ●	2727.1 ●	N/A
14	EAS16 ●	EAS1232MTR ●	2727.1 ●	2828.1 ●
16	EAS16 ●	EAS1232MTR ●	2727.1 ●	N/A
18	EAS20 ●	EAS1232MTR ●	2727.1 ●	2828.1 ●
20	EAS20 ●	EAS1232MTR ●	2727.1 ●	2828.1 ●

Ship Schedules:

- Next Day Shipment From Stock

SPEED CONTROL 2727.1 MAX 1/3 HP-5 AMP 120V
2828.1 MAX 1/2 HP-10 AMP 120V


ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE SHUTTER DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL GED					Sidewall Direct Drive Propeller Exhaust Fan								Ventilator with Open Drip-proof Motor	
MODEL GED	MOTOR Hp	RPM	NO. OF BLADES	SONES @ 0° SP	CFM/BHp at Static Pressure								115/1/60	
					0	1/10	1/8	1/4	3/8	1/2	5/8	3/4	STOCK NO.	
10	1/10	1550	4	6.5	847/0.1	708/0.1	673/0.1	480/0.1	-	-	-	-	-	GED10JH1AS ●
12	1/10	1550	4	9.8	1448/0.1	1331/0.1	1300/0.1	883/0.1	-	-	-	-	-	GED12JH1AS ●
	1/4	1625	4	10.5	1605/0.17	1521/0.17	1490/0.17	1357/0.19	918/0.19	591/0.22	-	-	-	GED12MH1AS ●
14	1/4	1625	4	9.4	2150/0.25	2045/0.26	2000/0.26	1825/0.26	1500/0.26	1125/0.26	850/0.26	-	-	GED14MH1AS ●
	1/2	1625	4	12.4	2675/0.53	2518/0.53	2460/0.53	2180/0.53	1760/0.53	1550/0.53	1275/0.53	-	-	GED14QH1AS ●
16	1/4	1075	4	9.7	2570/0.26	2350/0.26	2275/0.26	1508/0.26	515/0.26	-	-	-	-	GED16MM1AS ●
	1/3	1625	3	13.1	2805/0.34	2675/0.34	2625/0.34	2470/0.34	2215/0.34	1615/0.34	1150/0.34	765/0.34	-	GED16PH1AS ●
18	1/4	1075	3	9.1	3060/0.25	2790/0.26	2725/0.25	2140/0.25	1060/0.25	-	-	-	-	GED18MM1AS ●
	1/4	1625	3	16.3	3050/0.25	2875/0.26	2815/0.26	2600/0.26	2310/0.26	1765/0.26	1115/0.26	715/0.26	-	GED18MH1AS ●
	1/2	1625	3	16.5	3975/0.53	3815/0.53	3760/0.53	3560/0.53	3235/0.53	2920/0.53	1870/0.53	1450/0.53	-	GED18QH1AS ●
20	1/4	1075	3	10.7	3510/0.26	3200/0.26	3150/0.26	2615/0.26	1300/0.26	545/0.26	-	-	-	GED20MM1AS ●
	1/2	1625	3	16.1	3625/0.53	3425/0.53	3375/0.53	3125/0.53	2750/0.53	2275/0.53	1800/0.53	1425/0.53	-	GED20QH1AS ●

Speed (RPM) shown is nominal. Performance is based on actual speed of test.
 Performance ratings include the effects of appurtenances (accessories).
 Performance certified is for installation type A-free inlet, free outlet.
 The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301.
 Installation Type A: free inlet hemispherical sone levels.
 Fans use 3 & 4 blade fabricated aluminum propellers.


ASSEMBLED WALL HOUSING PACK - EXHAUST
 ASSEMBLED FAN/WALL HOUSING/DAMPER/OSHA GUARD

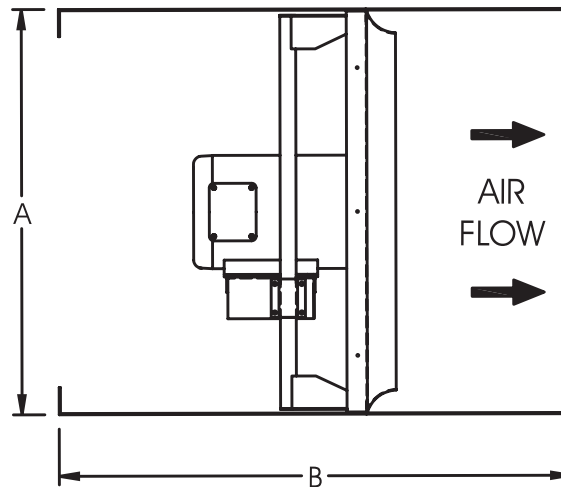

MODEL GED	A	B	PACK WITH GRAVITY DAMPER	PACK WITH MOTORIZED DAMPER
			STOCK NO.	STOCK NO.
10	17	26	WHPGED1012 ●	WHPGED1012M ●
12	17	26	WHPGED1012 ●	WHPGED1012M ●
14	21	26	WHPGED1416 ●	WHPGED1416M ●
16	21	26	WHPGED1416 ●	WHPGED1416M ●
18	25	26	WHPGED1820 ●	WHPGED1820M ●
20	25	26	WHPGED1820 ●	WHPGED1820M ●

PROPELLER WALL/DUCT FANS

MODEL LCE SIDEWALL BELT DRIVE PROPELLER EXHAUST FAN

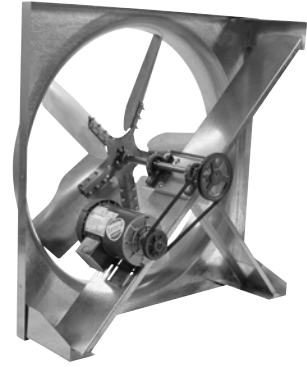

APPLICATION

Model LCE (exhaust) are high capacity belt driven propeller fans. Their primary application is the exhaust of large volumes of air at relatively low static pressures from commercial, light industrial and agricultural buildings such as manufacturing and assembly plants, warehouses, parking garages, gymnasiums, equipment rooms, distribution centers, poultry and greenhouses.

Belt driven fans provide large volumes of air at low fan speeds and low noise levels and afford quick, easy performance adjustments.

CONSTRUCTION

Panel Assembly

- Heavy-gauge galvanized steel.
- All welded motor & drive support frame assembly.
- Prepunched mounting holes.

Propeller

- Die formed galvanized steel blades.
- Epoxy coated hub keyed to fan shaft.
- Statically and dynamically balanced.

Drives

- Sized for minimum 150% of drive horsepower.
- Single belt adjustable pitch sheaves through 3 HP.
- Nonstatic v-belts.

Bearings

- Designed for minimum 200,000 hour life.
- Bearings are sealed, prelubricated with relube fittings.

Motors

- Open drip-proof construction is standard.
- All motors mounted and factory run tested.




JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models LC shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



UL STANDARD 705

PROPELLER WALL/DUCT FANS

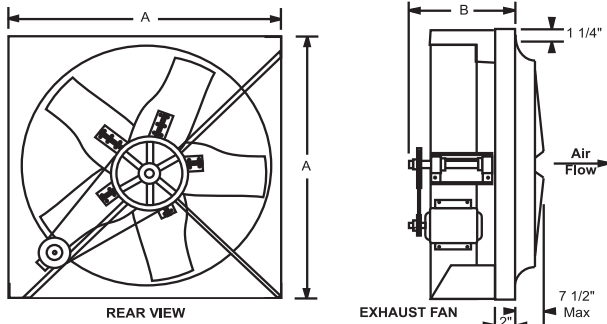

DIMENSIONAL DATA

MODEL LCE	A	B	Avg. Ship Wt. Lbs
20	24	15	85
24	30	15	90
30	36	15	100
36	42	15	105
42	48	16	110
48	54	16	125
54	60	20	240
60	66	20	285

ACCESSORIES

MODEL LCE	RECOMMENDED DAMPER*		DAMPER MOTOR (LOOSE)	WALL HOUSING PACK WITH GRAVITY DAMPER	WALL HOUSING PACK WITH MOTORIZED DAMPER	RAINHOOD	RAINHOOD BIRDSCREEN
	OD	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
20	22 1/2	EAS20 ●	EAS1232MTR ●	WHPLCE20 ●	WHPLCE20M ▲	5520.8.20KDS ●	5521.5.20RHS ●
24	28 1/2	EAS26 ●	EAS1232MTR ●	WHPLCE24 ●	WHPLCE24M ▲	5520.8.24KDS ●	5521.5.24RHS ●
30	34 1/2	EAS32 ●	EAS1232MTR ●	WHPLCE30 ●	WHPLCE30M ▲	5520.8.30KDS ●	5521.5.30RHS ●
36	40 1/2	EAS38 ●	EAS3850MTR ●	WHPLCE36 ●	WHPLCE36M ▲	5520.8.36KDS ●	5521.5.36RHS ●
42	46 1/2	EAS44 ●	EAS3850MTR ●	WHPLCE42 ●	WHPLCE42M ▲	5520.8.42KDS ●	5521.5.42RHS ●
48	52 1/2	EAS50 ●	EAS3850MTR ●	WHPLCE48 ●	WHPLCE48M ▲	5520.8.48KDS ●	5521.5.48RHS ●
54	58 1/2	S3GA54 ♦	MA220 ♦	WHPLCE54 ♦	WHPLCE54M ♦	5520.8.54KDS ♦	5521.5.54RHS ♦
60	64 1/2	S3GA62 ♦	MA220 ♦	WHPLCE60 ♦	WHPLCE60M ♦	5520.8.60KDS ♦	5521.5.60RHS ♦

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE SHUTTER DUE TO CONTINUING RESEARCH, JencOFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL LCE					Sidewall Belt Drive Propeller Exhaust Fan						Ventilator with Open Drip-proof Motor and Drive Assembly	
Model LCE	Motor Hp	Max BHP	RPM	SONES @ 0 SP	CFM at Static Pressure						115/1/60*	208-230/460/3/60
					0	1/10	1/8	1/4	3/8	1/2	STOCK NO.	STOCK NO.
20	1/4	0.30	955	11.5	3983	3600	3491	-	-	-	LCE20MH1S ●	LCE20MH3S ●
	1/3	0.40	1050	13.5	4379	4038	3941	3312	-	-	LCE20PH1S ●	LCE20PH3S ●
	1/2	0.60	1180	16.4	4921	4625	4543	4081	3182	-	LCE20QH1S ●	LCE20QH3S ●
	3/4	0.90	1350	20.0	5630	5377	5308	4934	4462	3538	LCE20RH1S ●	LCE20RH3S ●
24	1/4	0.30	600	10.2	5331	4652	4431	2269	-	-	LCE24MH1S ●	LCE24MH3S ●
	1/3	0.41	660	12.1	5864	5268	5086	3702	-	-	LCE24PH1S ●	LCE24PH3S ●
	1/2	0.60	760	15.7	6753	6254	6112	5212	-	-	LCE24QH1S ●	LCE24QH3S ●
	3/4	0.90	875	19.8	7775	7352	7237	6562	5600	-	LCE24RH1S ●	LCE24RH3S ●
	1	1.20	950	22.0	8441	8057	7953	7369	6625	5559	LCE24SH1S ●	LCE24SH3S ●
	1 1/2	1.82	1100	28.0	9774	9447	9361	8894	8347	7688	LCE24TH1S ●	LCE24TH3S ●
30	1/4	0.30	450	9.0	7365	6062	5572	-	-	-	LCE30MH1S ●	LCE30MH3S ●
	1/3	0.40	495	10.5	8101	6954	6603	-	-	-	LCE30PH1S ●	LCE30PH3S ●
	1/2	0.59	565	13.3	9247	8271	7995	6052	-	-	LCE30QH1S ●	LCE30QH3S ●
	3/4	0.90	650	17.1	10638	9853	9594	8198	-	-	LCE30RH1S ●	LCE30RH3S ●
	1	1.20	715	20.0	11702	11021	10802	9659	8052	-	LCE30SH1S ●	LCE30SH3S ●
	1 1/2	1.78	815	24.0	13339	12773	12599	11609	10482	9013	LCE30TH1S ●	LCE30TH3S ●
36	1/3	0.41	390	9.7	10755	8745	7976	-	-	-	LCE36PH1S ●	LCE36PH3S ●
	1/2	0.59	440	11.9	12133	10449	9923	-	-	-	LCE36QH1S ●	LCE36QH3S ●
	3/4	0.90	505	15.3	13926	12485	12100	9348	-	-	LCE36RH1S ●	LCE36RH3S ●
	1	1.19	555	18.1	15305	14018	13663	11419	-	-	LCE36SH1S ●	LCE36SH3S ●
	1 1/2	1.79	635	22.0	17511	16413	16111	14497	12146	-	LCE36TH1S ●	LCE36TH3S ●
	2	2.37	695	25.0	19165	18176	17907	16499	14594	12363	LCE36VH1S ●	LCE36VH3S ●
42	1/3	0.41	305	8.4	13173	9658	8439	-	-	-	LCE42PH1S ●	LCE42PH3S ●
	1/2	0.60	345	9.8	14901	12109	11073	-	-	-	LCE42QH1S ●	LCE42QH3S ●
	3/4	0.90	395	12.6	17060	14724	14044	7292	-	-	LCE42RH1S ●	LCE42RH3S ●
	1	1.20	435	14.9	18788	16703	16128	12182	-	-	LCE42SH1S ●	LCE42SH3S ●
	1 1/2	1.81	500	18.8	21596	19833	19339	16470	11827	-	LCE42TH1S ●	LCE42TH3S ●
	2	2.40	550	22.0	23755	22182	21746	19393	16034	-	LCE42VH1S ●	LCE42VH3S ●
48	1/2	0.62	290	10.0	17979	13841	12199	-	-	-	LCE48QH1S ●	LCE48QH3S ●
	3/4	0.91	330	12.1	20459	16949	15969	-	-	-	LCE48RH1S ●	LCE48RH3S ●
	1	1.23	365	14.3	22629	19504	18659	10868	-	-	LCE48SH1S ●	LCE48SH3S ●
	1 1/2	1.82	415	17.8	25729	23054	22306	17746	-	-	LCE48TH1S ●	LCE48TH3S ●
	2	2.39	455	21.0	28209	25800	25148	21574	15382	-	LCE48VH1S ●	LCE48VH3S ●
54	3/4	0.92	270	11.0	23384	-	17932	-	-	-	LCE54RH1S ◆	LCE54RH3S ◆
	1	1.20	295	13.1	25550	-	20825	-	-	-	LCE54SH1S ◆	LCE54SH3S ◆
	1 1/2	1.84	340	16.8	29447	-	25449	19183	-	-	LCE54TH1S ◆	LCE54TH3S ◆
	2	2.38	370	19.4	32045	-	28375	23692	-	-	LCE54VH1S ◆	LCE54VH3S ◆
	3	3.60	425	24.0	36809	-	33585	30290	24785	15677	N/A	LCE54WH3S ◆
60	1	1.21	265	11.5	28491	-	22275	-	-	-	LCE60SH1S ◆	LCE60SH3S ◆
	1 1/2	1.75	300	14.3	32254	-	27023	-	-	-	LCE60TH1S ◆	LCE60TH3S ◆
	2	2.44	335	17.1	36017	-	31464	25399	-	-	LCE60VH1S ◆	LCE60VH3S ◆
	3	3.56	380	21.0	40855	-	36826	32244	29351	-	N/A	LCE60WH3S ◆

PROPELLER WALL/DUCT FANS

Performance ratings include the effects of appurtenances (accessories).

Power ratings (BHP) do not include transmission losses.

Performance certified is for installation type A-free inlet, free outlet.

The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301.

Installation Type A: free inlet hemispherical sone levels.


*Tri-voltage (115-208-230) is standard on 3/4 through 1 1/2 Hp Single phase motors. Tri-voltage is available for the 1/2 Hp motors. Inquire for price and delivery.

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
◆ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL LCS

SIDEWALL BELT DRIVE PROPELLER SUPPLY FAN

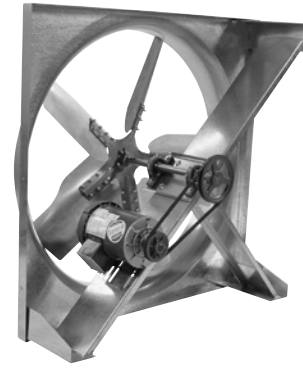

APPLICATION

Model LCS (supply) are high capacity belt driven propeller fans. Their primary application is the supply of large volumes of air at relatively low static pressures from commercial, light industrial and agricultural buildings such as manufacturing and assembly plants, warehouses, parking garages, gymnasiums, equipment rooms, distribution centers, poultry and greenhouses.

Belt driven fans provide large volumes of air at low fan speeds and low noise levels and afford quick, easy performance adjustments.

When suspended from the ceiling, thus keeping floor spaces open, model LC can be installed to direct large volumes of air downward toward work centers improving employee comfort and productivity.

Drives

- Sized for minimum 150% of drive horsepower.
- Single belt adjustable pitch sheaves through 3 HP.
- Nonstatic v-belts.

Bearings

- Designed for minimum 200,000 hour life.
- Bearings are sealed, prelubricated with relube fittings.

Motors

- Open drip-proof construction is standard.
- All motors mounted and factory run tested.



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models LC shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.



UL STANDARD 705

PROPELLER WALL/DUCT FANS



CONSTRUCTION

Panel Assembly

- Heavy-gauge galvanized steel.
- All welded motor & drive support frame assembly.
- Prepunched mounting holes.

Propeller

- Die formed galvanized steel blades.
- Epoxy coated hub keyed to fan shaft.
- Statically and dynamically balanced.



DIMENSIONAL DATA

MODEL LCS	A	C	Avg. Ship Wt. Lbs
20	24	23	85
24	30	23	90
30	36	24	100
36	42	24	105
42	48	24	110
48	54	24	125
54	60	26	240
60	66	26	285

ACCESSORIES

MODEL LCS	RECOMMENDED DAMPER* (SUPPLY)		DAMPER MOTOR (LOOSE)	WALL HOUSING PACK WITH GRAVITY DAMPER (SUPPLY)*	WALL HOUSING PACK WITH MOTORIZED DAMPER (SUPPLY)*	RAINHOOD (SUPPLY)*	RAINHOOD BIRDSCREEN (SUPPLY)*
	OD	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.	STOCK NO.
20	22 1/2	S3GA20RF ◆ ●	MP2781 ●	WHPLCS20 ●	WHPLCS20M ▲	7520.8.20KDS ●	7521.5.20RHS ●
24	28 1/2	S3GA26RF ◆ ●	MP2781 ●	WHPLCS24 ●	WHPLCS24M ▲	7520.8.24KDS ●	7521.5.24RHS ●
30	34 1/2	S3GA32RF ◆ ●	MP2781 ●	WHPLCS30 ●	WHPLCS30M ▲	7520.8.30KDS ●	7521.5.30RHS ●
36	40 1/2	S3GA38RF ●	MA220 ●	WHPLCS36 ●	WHPLCS36M ▲	7520.8.36KDS ●	7521.5.36RHS ●
42	46 1/2	S3GA44RF ●	MA220 ●	WHPLCS42 ●	WHPLCS42M ▲	7520.8.42KDS ●	7521.5.42RHS ●
48	52 1/2	S3GA50RF ●	MA220 ●	WHPLCS48 ●	WHPLCS48M ▲	7520.8.48KDS ●	7521.5.48RHS ●
54	58 1/2	S3GA56RF ◆	MA220 ◆	WHPLCS54 ◆	WHPLCS54M ◆	7520.8.54KDS ◆	7521.5.54RHS ◆
60	64 1/2	S3GA60RF ◆	MA220 ◆	WHPLCS60 ◆	WHPLCS60M ◆	7520.8.60KDS ◆	7521.5.60RHS ◆

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE SHUTTER DUE TO CONTINUING RESEARCH, JencOFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL LCS

Sidewall Belt Drive Propeller Supply Fan

Ventilator with Open Drip-proof Motor and Drive Assembly

Model LCS	Motor Hp	Max BHP	RPM	SONES @ 0 SP	CFM at Static Pressure						115/160*	208-230/460/3/60
					0	1/10	1/8	1/4	3/8	1/2	STOCK NO.	STOCK NO.
20	1/4	0.30	955	11.5	3983	3600	3491	-	-	-	LCS20MH1S ●	LCS20MH3S ●
	1/3	0.40	1050	13.5	4379	4038	3941	3312	-	-	LCS20PH1S ●	LCS20PH3S ●
	1/2	0.60	1180	16.4	4921	4625	4543	4081	3182	-	LCS20QH1S ●	LCS20QH3S ●
	3/4	0.90	1350	20.0	5630	5377	5308	4934	4462	3538	LCS20RH1S ●	LCS20RH3S ●
24	1/4	0.30	600	10.2	5331	4652	4431	2269	-	-	LCS24MH1S ●	LCS24MH3S ●
	1/3	0.41	660	12.1	5864	5268	5086	3702	-	-	LCS24PH1S ●	LCS24PH3S ●
	1/2	0.60	760	15.7	6753	6254	6112	5212	-	-	LCS24QH1S ●	LCS24QH3S ●
	3/4	0.90	875	19.8	7775	7352	7237	6562	5600	-	LCS24RH1S ●	LCS24RH3S ●
	1	1.20	950	22.0	8441	8057	7953	7369	6625	5559	LCS24SH1S ●	LCS24SH3S ●
	1 1/2	1.82	1100	28.0	9774	9447	9361	8894	8347	7688	LCS24TH1S ●	LCS24TH3S ●
30	1/4	0.30	450	9.0	7365	6062	5572	-	-	-	LCS30MH1S ●	LCS30MH3S ●
	1/3	0.40	495	10.5	8101	6954	6603	-	-	-	LCS30PH1S ●	LCS30PH3S ●
	1/2	0.59	565	13.3	9247	8271	7995	6052	-	-	LCS30QH1S ●	LCS30QH3S ●
	3/4	0.90	650	17.1	10638	9853	9594	8198	-	-	LCS30RH1S ●	LCS30RH3S ●
	1	1.20	715	20.0	11702	11021	10802	9659	8052	-	LCS30SH1S ●	LCS30SH3S ●
	1 1/2	1.78	815	24.0	13339	12773	12599	11609	10482	9013	LCS30TH1S ●	LCS30TH3S ●
36	1/3	0.41	390	9.7	10755	8745	7976	-	-	-	LCS36PH1S ●	LCS36PH3S ●
	1/2	0.59	440	11.9	12133	10449	9923	-	-	-	LCS36QH1S ●	LCS36QH3S ●
	3/4	0.90	505	15.3	13926	12485	12100	9348	-	-	LCS36RH1S ●	LCS36RH3S ●
	1	1.19	555	18.1	15305	14018	13663	11419	-	-	LCS36SH1S ●	LCS36SH3S ●
	1 1/2	1.79	635	22.0	17511	16413	16111	14497	12146	-	LCS36TH1S ●	LCS36TH3S ●
	2	2.37	695	25.0	19165	18176	17907	16499	14594	12363	LCS36VH1S ●	LCS36VH3S ●
42	1/3	0.41	305	8.4	13173	9658	8439	-	-	-	LCS42PH1S ●	LCS42PH3S ●
	1/2	0.60	345	9.8	14901	12109	11073	-	-	-	LCS42QH1S ●	LCS42QH3S ●
	3/4	0.90	395	12.6	17060	14724	14044	7292	-	-	LCS42RH1S ●	LCS42RH3S ●
	1	1.20	435	14.9	18788	16703	16128	12182	-	-	LCS42SH1S ●	LCS42SH3S ●
	1 1/2	1.81	500	18.8	21596	19833	19339	16470	11827	-	LCS42TH1S ●	LCS42TH3S ●
	2	2.40	550	22.0	23755	22182	21746	19393	16034	-	LCS42VH1S ●	LCS42VH3S ●
48	1/2	0.62	290	10.0	17979	13841	12199	-	-	-	LCS48QH1S ●	LCS48QH3S ●
	3/4	0.91	330	12.1	20459	16949	15969	-	-	-	LCS48RH1S ●	LCS48RH3S ●
	1	1.23	365	14.3	22629	19504	18659	10868	-	-	LCS48SH1S ●	LCS48SH3S ●
	1 1/2	1.82	415	17.8	25729	23054	22306	17746	-	-	LCS48TH1S ●	LCS48TH3S ●
	2	2.39	455	21.0	28209	25800	25148	21574	15382	-	LCS48VH1S ●	LCS48VH3S ●
54	3/4	0.92	270	11.0	23384	-	17932	-	-	-	LCS54RH1S ◆	LCS54RH3S ◆
	1	1.20	295	13.1	25550	-	20825	-	-	-	LCS54SH1S ◆	LCS54SH3S ◆
	1 1/2	1.84	340	16.8	29447	-	25449	19183	-	-	LCS54TH1S ◆	LCS54TH3S ◆
	2	2.38	370	19.4	32045	-	28375	23692	-	-	LCS54VH1S ◆	LCS54VH3S ◆
	3	3.60	425	24.0	36809	-	33585	30290	24785	15677	N/A	LCS54WH3S ◆
60	1	1.21	265	11.5	28491	-	22275	-	-	-	LCS60SH1S ◆	LCS60SH3S ◆
	1 1/2	1.75	300	14.3	32254	-	27023	-	-	-	LCS60TH1S ◆	LCS60TH3S ◆
	2	2.44	335	17.1	36017	-	31464	25399	-	-	LCS60VH1S ◆	LCS60VH3S ◆
	3	3.56	380	21.0	40855	-	36826	32244	29351	-	N/A	LCS60WH3S ◆

PROPELLER WALL/DUCT FANS

Performance ratings include the effects of appurtenances (accessories).

Power ratings (BHP) do not include transmission losses.

Performance certified is for installation type A-free inlet, free outlet.

The sound ratings shown are loudness values in fan sones @ 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301.

Installation Type A: free inlet hemispherical sone levels.

*Tri-voltage (115-208-230) is standard on 3/4 through 1 1/2 Hp Single phase motors. Tri-voltage is available for the 1/2 Hp motors. Inquire for price and delivery.

Ship Schedules:	
●	Next Day Shipment From Stock
▲	3 Day Shipment From Stock
◆	10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL CM

BELT DRIVEN UTILITY VENT SET

SWSI ARRANGEMENT #10

CLASS 1 CONSTRUCTION



Application

JencoFan's Model CM is available in a full range of sizes (10 through 36) provides airflow performance from 500 CFM to over 21,000 CFM with static pressure up to 5 in. w.g. This single inlet backward inclined utility fan provides substantial benefits for pressure flow, low power consumption and low noise level, ideal for commercial and industrial applications. Typical applications include either supply or exhaust service for ducted systems in schools, theaters, gymnasiums, manufacturing plants, hotels, office buildings, restaurant hoods, and many other general ventilation applications.

The turbine performance, minimizes unnecessary energy losses resulting in a system with high efficiency.

Its design, manufacture and testing guarantee a long operating life with low maintenance. Also having great versatility in arrangements, and available positions with a complete series of mounting accessories for installation and proper operation of equipment for each application.

The mechanical design and construction determines the maximum operating speed and power. The performance ranges shown on the following pages comply with the Class I operating limits as defined in AMCA standard 99.

Type: UTILITY VENT SET

Type of Wheel: Backward Inclined

Rotation: CW and CCW

Sizes: 10, 12, 14, 16, 18, 20, 22, 24, 27, 30, 36

Construction

Housing & Drive Frame Structure

The unit is solidly built, housing joints are welded intervals, this provides greater strength, accuracy on the boards and makes a robust unit, which is an added value.

Wheel

Backward inclined centrifugal wheel is constructed of steel blades protected with a polyester powder coat finish. All wheels are statically and dynamically balanced to ISO 1940 and AMCA 204-G2.5 standards.

Paint

The unit is subjected to a coil coating process, where the steel is treated chemically to ensure the adherence of the polyester paint. Subsequently, powder coating is bonded to the parts through an electrostatic process, where after baking the piece takes on its highest characteristics corrosion resistance, with great adhesion properties and impact resistance.

Shafts and Bearings

Turned, ground and polished allow steel shafts sized so the first critical speed is at least 30% over the maximum operating speed. Standard bearings are heavy-duty, self-aligning pillow block ball bearings with minimum L10 life in excess of 100,000 hours at maximum cataloged operating conditions.

Motors

Heavy-duty ball bearing motors are factory mounted on an adjustable base for ease of service and belt maintenance. Standard motor enclosures are Open Drip Proof (ODP).

Drives

V-belt drives are selected for a minimum safety factor of 150% of the driven horsepower. Cast iron motor pulleys are adjustable for final system balancing and are factory set to the required RPM range. Dual groove v-belt drives are standard for motors 5 HP thru 10 HP.

Temperature

Standard operating temperature range for cULus 705 units is -20°F to 200°F. For fans with cULus 762 construction the range is -20°F to 400°F.

cULus 762 Fan Installation

Model CM is available with the 762 grease listing from UL. The fan will operate with continuous airstream temperatures of 400°F. Per NFPA 96, the fan discharge must be at least 40 inches above the roof line and the duct must be of all welded construction with a minimum distance of 18 inches above the roof line.

Stock units are either CM, cULus705 listed (non-grease) or CM-RHUL, cULus762 listed (restaurant exhaust).

CM - cULus705 units include inlet/L-Flange, weather cover, integral mounting flanges, access door, threaded drain fitting and cULus705 label. CM units have clockwise rotation and top horizontal configuration (CW-TH).

CM-RHUL - cULus762 units include inlet/L-Flange, weather cover, threaded drain fitting, access door, integral mounting flanges and cULus762 label. CM-RHUL units have clockwise rotation and upblast configuration (CW-UB).

AMCA SEAL




JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CM shown herein are licensed to bear the AMCA Seal (except CM 10). The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.





STANDARD 705
STANDARD 762

Model CM - Discharge Positions

cULus 705 Clockwise Top Horizontal
CW-TH

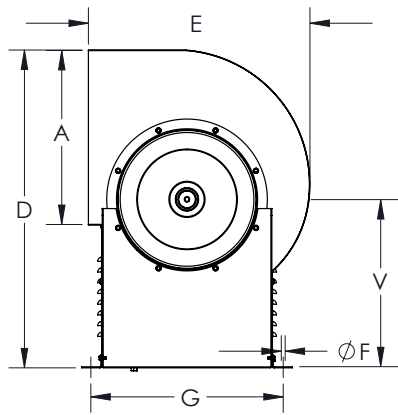

cULus 762 Clockwise Upblast
CW-UB

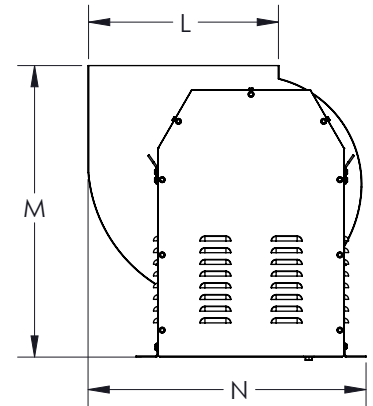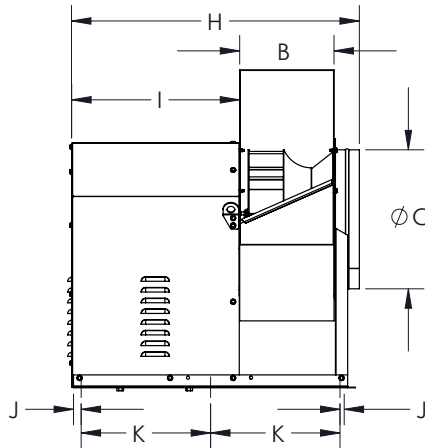

Dimensions

Model	A	B	C	D	E	F	G	H	I	J	K
10	12 5/8	7 1/16	9 13/16	23 7/8	17 3/16	1/2	16 7/8	25 3/8	15 1/2	1	10 13/16
12	15 7/8	8 3/4	12 3/8	29 3/16	21 3/8	1/2	19 5/8	28 11/16	17 1/16	1	12 1/2
14	17 7/8	9 3/4	14	32 3/4	22 3/4	1/2	19 5/8	30 3/4	17 13/16	1	13 5/16
16	19 15/16	10 13/16	15 3/4	36 3/4	25 1/4	1/2	21 7/8	31 9/16	17 15/16	1	13 7/8
18	22 3/8	12 1/8	17 11/16	40 7/8	28 7/16	1/2	24 3/4	36 15/16	21 9/16	1	16 5/8
20	25 1/8	13 9/16	19 11/16	44 7/8	31 5/16	1/2	27 7/16	38 7/8	21 9/16	1	17 7/16
22	28 1/8	15 3/16	22 1/16	49 3/8	34 15/16	1/2	29 7/8	40 1/8	21 5/8	1	18 1/4
24	31 1/2	17 1/16	24 13/16	57 1/8	39 1/8	1/2	33 1/4	41 15/16	21 5/8	1	19 1/8
27	35 3/8	18 7/8	27 15/16	59	44	1/2	35 1/8	50 1/8	27 1/8	2	19 13/16
30	39 5/8	21	31 1/2	64	49 1/4	1/2	39 7/16	53 13/16	28 11/16	2	23 5/8
36	44 1/2	23 7/16	35 7/16	71 7/8	55 1/4	1/2	44 5/8	54 15/16	27 5/16	2	24 3/16

Model	L	M	N	V
10	12 3/4	21 5/8	20	13-1/4
12	16	26	24 1/4	15-3/4
14	18	28	25 7/8	17-11/16
16	20	31 1/8	29 1/4	19-11/16
18	22 1/2	34 3/8	32 3/4	21-5/8
20	25 1/4	37 1/2	36 1/8	23-5/8
22	28 1/4	41	40 1/8	25-9/16
24	31 5/8	45 7/8	44 5/8	30-1/4
27	35 1/2	55 5/8	50 5/8	28-3/4
30	39 3/4	62 3/8	57 1/8	30
36	44 3/4	70 1/2	64 3/8	33-1/2

Physical data

Model	Wheel Dia. (in)	Outlet Area (sq. ft.)	Avg. Weight	Shaft Dia.	Max RPM	Max HP	FEG
10	10 1/16	0.625	123	0.75	2998	0.75	-
12	12 11/16	0.97	154	1	2873	2	80
14	14 7/8	1.2	172	1	2672	3	80
16	16	1.49	202	1	2268	3	80
18	17 15/16	1.88	251	1.5	2137	5	80
20	20 3/16	2.33	287	1.5	1823	5	80
22	22 4/16	2.95	389	1.5	1716	7.5	80
24	25 3/16	3.7	465	1.5	1533	10	80
27	28 1/4	4.7	680	1.75	1297	10	80
30	31 7/8	5.76	931	1.75	1093	10	85
36	35 5/8	7.26	1228	2.1875	1061	10	85

UTILITY VENT SET CENTRIFUGAL FANS

Model CM - Options and Accessories

Model CM	U-Flange Inlet	Outlet Flange	Inlet Guard	Outlet Guard	Shaft Seal
	Stock #	Stock #	Stock #	Stock #	Stock #
10	101882 ▲	104550 ▲	104656 ▲	104630 ▲	104120 ▲
12	101872 ▲	104551 ▲	104657 ▲	104631 ▲	104150 ▲
14	101873 ▲	104552 ▲	104658 ▲	104632 ▲	104150 ▲
16	101874 ◆	104553 ◆	104659 ◆	104633 ◆	104150 ◆
18	101875 ◆	104554 ◆	104660 ◆	104634 ◆	104304 ◆
20	101876 ◆	104555 ◆	104661 ◆	104635 ◆	104304 ◆
22	101877 ◆	104556 ◆	104662 ◆	104636 ◆	104304 ◆
24	101878 ◆	104557 ◆	104663 ◆	104637 ◆	104304 ◆
27	101879 ◆	104558 ◆	104664 ◆	104638 ◆	104421 ◆
30	101880 ◆	104559 ◆	104665 ◆	104639 ◆	104421 ◆
36	101881 ◆	104571 ◆	104666 ◆	104640 ◆	104501 ◆

Model CM	Heavy-Duty Gravity Discharge Shutter	Grease Trough	Vibration Pads		Mounting Rails
			RIS	SPRING	
	Stock #	Stock #	Stock #	Stock #	Stock #
10	104643 ▲	90005891BVS ▲	104669 ▲	104682 ▲	201570 ▲
12	104644 ▲	90005891BVS ▲	104670 ▲	104683 ▲	201571 ▲
14	104645 ▲	90005891BVS ▲	104671 ▲	104684 ▲	201572 ▲
16	104646 ◆	90005891BVS ◆	104672 ◆	104685 ◆	201573 ◆
18	104647 ◆	90005891BVS ◆	104673 ◆	104686 ◆	201574 ◆
20	104648 ◆	90005891BVS ◆	104674 ◆	104687 ◆	201575 ◆
22	104649 ◆	90005891BVS ◆	104675 ◆	104688 ◆	201576 ◆
24	104650 ◆	90005891BVS ◆	104676 ◆	104689 ◆	201577 ◆
27	104651 ◆	90005891BVS ◆	104677 ◆	104690 ◆	201578 ◆
30	104652 ◆	90005891BVS ◆	104678 ◆	104691 ◆	201579 ◆
36	104653 ◆	90005891BVS ◆	104679 ◆	104692 ◆	201580 ◆

UTILITY VENT SET CENTRIFUGAL FANS

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
◆ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL CM		Belt Driven Utility Vent Set SWSI Arrangement #10 Class 1 Construction												
	HP	Stock Number	RPM	Max BHP	CFM at Static Pressure (Inches w.g.)									
					1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5
10	1/4	CM10ML__S ▲	1325	0.07	507	270	-	-	-	-	-	-	-	-
			1450	0.09	610	455	-	-	-	-	-	-	-	-
			1550	0.11	686	556	-	-	-	-	-	-	-	-
			1675	0.14	777	665	526	-	-	-	-	-	-	-
	1/4	CM10MH__S ▲	1800	0.17	865	765	651	500	-	-	-	-	-	-
			1925	0.21	950	860	761	643	480	-	-	-	-	-
			2050	0.25	1033	951	862	762	642	-	-	-	-	-
	1/3	CM10PH__S ▲	2100	0.27	1066	986	900	806	696	-	-	-	-	-
			2175	0.3	1115	1038	957	869	770	-	-	-	-	-
			2250	0.33	1163	1090	1013	930	839	596	-	-	-	-
	1/2	CM10QH__S ▲	2300	0.35	1196	1124	1049	970	882	663	-	-	-	-
			2375	0.39	1244	1175	1103	1028	946	750	-	-	-	-
			2475	0.44	1307	1242	1174	1103	1027	853	604	-	-	-
			2575	0.49	1370	1307	1243	1176	1105	947	745	-	-	-
	3/4	CM10RH__S ▲	2625	0.52	1401	1340	1277	1212	1143	992	805	-	-	-
			2725	0.58	1464	1405	1345	1283	1218	1078	912	683	-	-
2850			0.67	1541	1486	1428	1370	1309	1180	1033	852	-	-	
2950			0.74	1603	1549	1494	1438	1380	1258	1122	963	-	-	
12	1/4	CM12MH__S ▲	1025	0.1	754	-	-	-	-	-	-	-	-	-
			1125	0.13	923	-	-	-	-	-	-	-	-	-
			1250	0.18	1114	914	-	-	-	-	-	-	-	-
			1375	0.24	1293	1126	924	-	-	-	-	-	-	-
	1/3	CM12PH__S ▲	1450	0.28	1397	1243	1067	838	-	-	-	-	-	-
			1525	0.33	1499	1356	1198	1008	733	-	-	-	-	-
	1/2	CM12QH__S ▲	1600	0.38	1599	1465	1320	1155	947	-	-	-	-	-
			1675	0.44	1698	1571	1437	1288	1114	-	-	-	-	-
			1750	0.5	1795	1676	1550	1413	1260	806	-	-	-	-
	3/4	CM12RH__S ▲	1850	0.59	1924	1812	1695	1572	1437	1099	-	-	-	-
			1925	0.66	2020	1912	1802	1685	1561	1267	-	-	-	-
			2000	0.74	2115	2012	1906	1796	1680	1416	1047	-	-	-
	1	CM12SH__S ▲	2050	0.8	2178	2077	1975	1869	1758	1508	1184	-	-	-
			2125	0.89	2272	2175	2077	1976	1871	1640	1359	-	-	-
			2200	0.99	2365	2272	2178	2081	1981	1766	1513	1173	-	-
	1 1/2	CM12TH__S ▲	2275	1.1	2458	2368	2278	2185	2089	1886	1656	1368	-	-
			2350	1.21	2551	2464	2376	2287	2196	2003	1789	1536	-	-
			2450	1.37	2674	2591	2507	2422	2335	2154	1958	1735	-	-
			2525	1.5	2766	2685	2604	2522	2438	2265	2079	1873	1309	-
	2	CM12VH__S ▲	2600	1.64	2858	2779	2700	2621	2540	2374	2197	2004	1515	-
			2675	1.78	2949	2873	2796	2719	2641	2481	2312	2130	1690	-
			2775	1.99	3070	2997	2923	2849	2774	2622	2462	2292	1899	1305

UTILITY VENT SET CENTRIFUGAL FANS

Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.




JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CM shown herein are licensed to bear the AMCA Seal (except CM 10). The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

Ship Schedules:	
▲	3 Day Shipment From Stock
◆	10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

UTILITY VENT SET CENTRIFUGAL FANS

MODEL CM		Belt Driven Vent Set SWSI Arrangement #10 Class 1 Construction												
HP	Stock Number	RPM	Max BHP	CFM at Static Pressure (Inches w.g.)										
				1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	
14	1/4 CM14MH__S ▲	950	0.14	1061	652	-	-	-	-	-	-	-	-	-
		1050	0.19	1277	1019	-	-	-	-	-	-	-	-	-
		1150	0.25	1477	1269	985	-	-	-	-	-	-	-	-
	1/3 CM14PH__S ▲	1200	0.29	1574	1381	1142	-	-	-	-	-	-	-	-
		1250	0.32	1669	1488	1276	962	-	-	-	-	-	-	-
	1/2 CM14QH__S ▲	1300	0.37	1763	1592	1400	1149	-	-	-	-	-	-	-
		1375	0.43	1902	1743	1571	1368	1079	-	-	-	-	-	-
		1445	0.5	2030	1880	1722	1545	1325	-	-	-	-	-	-
	3/4 CM14RH__S ▲	1500	0.56	2130	1986	1836	1673	1482	-	-	-	-	-	-
		1575	0.65	2264	2128	1988	1839	1673	1189	-	-	-	-	-
		1650	0.75	2397	2267	2135	1997	1848	1472	-	-	-	-	-
	1 CM14SH__S ▲	1725	0.86	2530	2405	2280	2150	2014	1692	1128	-	-	-	-
1800		0.97	2661	2541	2422	2300	2172	1886	1491	-	-	-	-	
1 1/2 CM14TH__S ▲	1875	1.1	2792	2677	2562	2446	2326	2065	1739	1114	-	-	-	
	1975	1.28	2965	2855	2746	2637	2526	2289	2015	1645	-	-	-	
	2075	1.49	3137	3032	2928	2825	2720	2501	2259	1967	-	-	-	
2 CM14VH__S ▲	2150	1.65	3265	3164	3064	2964	2863	2655	2431	2172	-	-	-	
	2225	1.84	3393	3295	3198	3101	3005	2806	2595	2360	1670	-	-	
	2290	2	3504	3408	3313	3220	3126	2935	2734	2514	1934	-	-	
3 CM14WH__S ▲	2400	2.3	3691	3598	3508	3418	3329	3148	2961	2762	2283	-	-	
	2500	2.61	3860	3771	3684	3597	3511	3339	3162	2977	2553	1924	-	
	2600	2.93	4028	3942	3858	3775	3692	3527	3359	3185	2799	2299	-	
16	1/4 CM16MH__S ◆	825	0.16	1222	-	-	-	-	-	-	-	-	-	
		900	0.21	1455	1085	-	-	-	-	-	-	-	-	
		950	0.25	1601	1287	-	-	-	-	-	-	-	-	
	1/3 CM16PH__S ◆	1000	0.29	1741	1462	-	-	-	-	-	-	-	-	
		1050	0.33	1879	1623	1300	-	-	-	-	-	-	-	
	1/2 CM16QH__S ◆	1100	0.38	2013	1775	1497	1061	-	-	-	-	-	-	
		1150	0.44	2146	1922	1672	1346	-	-	-	-	-	-	
		1200	0.5	2276	2064	1835	1561	-	-	-	-	-	-	
	3/4 CM16RH__S ◆	1250	0.56	2406	2203	1989	1747	1428	-	-	-	-	-	
		1300	0.63	2534	2339	2138	1917	1651	-	-	-	-	-	
		1375	0.75	2724	2540	2353	2155	1933	-	-	-	-	-	
	1 CM16SH__S ◆	1425	0.83	2850	2671	2493	2306	2103	1553	-	-	-	-	
1475		0.92	2975	2802	2630	2453	2264	1796	-	-	-	-		
1510		0.99	3062	2893	2725	2554	2373	1943	-	-	-	-		
1 1/2 CM16TH__S ◆	1550	1.07	3162	2996	2832	2667	2494	2097	1458	-	-	-		
	1625	1.23	3347	3187	3031	2875	2714	2361	1898	-	-	-		
	1735	1.5	3617	3465	3318	3172	3025	2713	2352	1844	-	-		
2 CM16VH__S ◆	1775	1.6	3714	3565	3421	3278	3135	2835	2496	2054	-	-		
	1850	1.82	3897	3752	3613	3476	3339	3057	2749	2382	-	-		
	1900	1.97	4018	3876	3740	3606	3473	3201	2910	2574	-	-		
3 CM16WH__S ◆	1975	2.2	4199	4062	3930	3800	3672	3413	3141	2840	1950	-		
	2075	2.56	4440	4307	4180	4056	3934	3689	3437	3167	2491	-		
	2175	2.95	4680	4552	4429	4310	4193	3960	3723	3476	2901	1916		




JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CM shown herein are licensed to bear the AMCA Seal (except CM 10). The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL CM		Belt Driven Vent Set SWSI Arrangement #10 Class 1 Construction												
HP	Stock Number	RPM	Max BHP	CFM at Static Pressure (Inches w.g.)										
				1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	
1/4	CM18MH__S ♦	700	0.18	1438	-	-	-	-	-	-	-	-	-	-
		750	0.22	1680	1052	-	-	-	-	-	-	-	-	-
		775	0.25	1793	1269	-	-	-	-	-	-	-	-	-
1/3	CM18PH__S ♦	800	0.27	1902	1439	-	-	-	-	-	-	-	-	-
		850	0.33	2113	1723	-	-	-	-	-	-	-	-	-
1/2	CM18QH__S ♦	875	0.36	2216	1850	-	-	-	-	-	-	-	-	-
		925	0.42	2416	2087	1669	-	-	-	-	-	-	-	-
		975	0.5	2611	2309	1955	-	-	-	-	-	-	-	-
3/4	CM18RH__S ♦	1025	0.58	2802	2522	2207	1808	-	-	-	-	-	-	-
		1075	0.66	2991	2727	2441	2104	1625	-	-	-	-	-	-
		1120	0.75	3158	2908	2641	2340	1962	-	-	-	-	-	-
1	CM18SH__S ♦	1175	0.87	3360	3124	2876	2606	2291	-	-	-	-	-	-
		1225	0.98	3542	3316	3083	2833	2554	1720	-	-	-	-	-
1 1/2	CM18TH__S ♦	1300	1.17	3813	3601	3384	3158	2914	2309	-	-	-	-	-
		1350	1.32	3991	3787	3580	3366	3139	2608	-	-	-	-	-
		1400	1.47	4169	3972	3774	3570	3357	2875	2201	-	-	-	-
2	CM18VH__S ♦	1450	1.63	4345	4155	3965	3770	3568	3124	2560	-	-	-	-
		1500	1.8	4521	4337	4153	3967	3774	3360	2862	2104	-	-	-
		1550	1.99	4696	4518	4340	4161	3977	3586	3135	2538	-	-	-
3	CM18WH__S ♦	1625	2.29	4957	4787	4618	4447	4274	3912	3511	3030	-	-	-
		1675	2.5	5130	4965	4801	4636	4469	4123	3747	3312	-	-	-
		1725	2.74	5303	5142	4983	4823	4662	4329	3974	3574	-	-	-
		1775	2.99	5475	5319	5164	5009	4852	4532	4194	3822	2818	-	-
5	CM18XH__S ♦	1900	3.66	5904	5757	5612	5467	5322	5028	4723	4399	3636	-	-
		2000	4.28	6245	6105	5967	5829	5691	5414	5130	4833	4168	3269	-
		2100	4.95	6585	6451	6319	6188	6057	5794	5526	5250	4652	3925	-

Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CM shown herein are licensed to bear the AMCA Seal (except CM 10). The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

Ship Schedules:	
▲	3 Day Shipment From Stock
♦	10 Day Shipment

How to order:

Model Number	Motor HP	RPM	Phase	UL	Stock
Example: CM24	P	H	1	U	S
CM24	P=1/3 Q=1/2 R=3/4 S=1 T=1 1/2 V=2 W=3 X=5 Y=7 1/2 Z=10	L=Low M=Medium H=High	1 or 3	U=cULus705 R=cULus762	S=Stock

Indicates Customer Provided Information


Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

UTILITY VENT SET CENTRIFUGAL FANS

UTILITY VENT SET CENTRIFUGAL FANS

MODEL CM		Belt Driven Utility Vent Set SWSI Arrangement #10 Class 1 Construction												
HP	Stock Number	RPM	Max BHP	CFM at Static Pressure (Inches w.g.)										
				1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	
20	1/3 CM20PH__S ♦	625	0.21	1795	-	-	-	-	-	-	-	-	-	-
		675	0.27	2137	1368	-	-	-	-	-	-	-	-	-
		720	0.33	2418	1840	-	-	-	-	-	-	-	-	-
	1/2 CM20QH__S ♦	775	0.42	2743	2267	-	-	-	-	-	-	-	-	-
		825	0.5	3027	2606	2068	-	-	-	-	-	-	-	-
	3/4 CM20RH__S ♦	850	0.55	3166	2765	2279	1381	-	-	-	-	-	-	-
		900	0.65	3439	3071	2654	2099	-	-	-	-	-	-	-
		940	0.75	3654	3307	2926	2464	1705	-	-	-	-	-	-
	1 CM20SH__S ♦	975	0.83	3840	3508	3152	2740	2184	-	-	-	-	-	-
		1025	0.97	4102	3789	3461	3097	2659	-	-	-	-	-	-
		1040	1	4180	3872	3551	3199	2783	-	-	-	-	-	-
	1 1/2 CM20TH__S ♦	1125	1.28	4617	4335	4046	3742	3408	2512	-	-	-	-	-
1175		1.46	4872	4601	4328	4043	3738	2997	-	-	-	-	-	
2 CM20VH__S ♦	1200	1.55	4998	4734	4466	4190	3898	3207	-	-	-	-	-	
	1250	1.75	5250	4996	4740	4479	4206	3590	2720	-	-	-	-	
	1300	1.97	5500	5255	5011	4762	4505	3942	3229	-	-	-	-	
3 CM20WH__S ♦	1350	2.2	5749	5513	5277	5040	4796	4273	3652	2735	-	-	-	
	1425	2.59	6120	5895	5672	5449	5222	4745	4210	3546	-	-	-	
	1500	3.03	6489	6274	6062	5851	5637	5195	4717	4166	-	-	-	
5 CM20XH__S ♦	1600	3.68	6978	6775	6576	6378	6179	5773	5347	4880	3651	-	-	
	1675	4.21	7342	7148	6957	6767	6578	6194	5796	5372	4353	-	-	
	1750	4.81	7705	7519	7335	7153	6972	6607	6233	5840	4946	3627	-	
	1770	4.98	7802	7617	7436	7256	7076	6716	6347	5962	5093	3873	-	

Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.

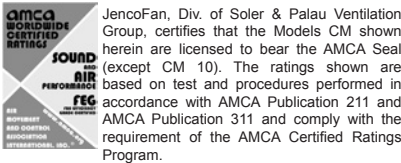

Ship Schedules:	
▲	3 Day Shipment From Stock
◆	10 Day Shipment

How to order:

	Model Number	Motor HP	RPM	Phase	UL	Stock
Example:	CM24	P	H	1	U	S
	CM24	P=1/3 Q=1/2 R=3/4 S=1 T=1 1/2 V=2 W=3 X=5 Y=7 1/2 Z=10	L=Low M=Medium H=High	1 or 3	U=cULus705 R=cULus762	S=Stock

Indicates Customer Provided Information

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL CM		Belt Driven Utility Vent Set SWSI Arrangement #10 Class 1 Construction												
HP	Stock Number	RPM	Max BHP	CFM at Static Pressure (Inches w.g.)										
				1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	
22	1/3	CM22PH__S ♦	575	0.29	2384	-	-	-	-	-	-	-	-	-
			590	0.31	2527	1293	-	-	-	-	-	-	-	-
			600	0.33	2620	1593	-	-	-	-	-	-	-	-
	1/2	CM22QH__S ♦	620	0.37	2799	1952	-	-	-	-	-	-	-	-
			650	0.42	3059	2347	-	-	-	-	-	-	-	-
			680	0.48	3309	2677	-	-	-	-	-	-	-	-
	3/4	CM22RH__S ♦	695	0.52	3431	2830	-	-	-	-	-	-	-	-
			725	0.59	3672	3118	2386	-	-	-	-	-	-	-
			755	0.66	3908	3390	2762	-	-	-	-	-	-	-
			785	0.75	4140	3652	3090	-	-	-	-	-	-	-
	1	CM22SH__S ♦	800	0.79	4255	3779	3242	2514	-	-	-	-	-	-
			830	0.88	4483	4029	3533	2920	-	-	-	-	-	-
860			0.98	4709	4274	3809	3266	2484	-	-	-	-	-	
1 1/2	CM22TH__S ♦	890	1.09	4933	4514	4075	3581	2950	-	-	-	-	-	
		920	1.2	5154	4750	4332	3875	3328	-	-	-	-	-	
		950	1.32	5375	4983	4583	4154	3664	-	-	-	-	-	
		980	1.45	5593	5213	4829	4424	3973	-	-	-	-	-	
2	CM22VH__S ♦	1025	1.66	5919	5555	5190	4813	4406	3369	-	-	-	-	
		1055	1.81	6135	5780	5427	5065	4681	3756	-	-	-	-	
		1085	1.97	6350	6004	5661	5312	4946	4101	-	-	-	-	
3	CM22WH__S ♦	1130	2.23	6671	6337	6008	5676	5333	4572	3535	-	-	-	
		1160	2.41	6884	6557	6236	5914	5584	4865	3955	-	-	-	
		1220	2.8	7307	6994	6688	6383	6074	5421	4660	3581	-	-	
		1250	3.01	7518	7211	6912	6614	6314	5687	4976	4051	-	-	
5	CM22XH__S ♦	1295	3.35	7833	7535	7245	6958	6670	6075	5421	4635	-	-	
		1340	3.71	8147	7857	7575	7297	7020	6452	5843	5144	-	-	
		1400	4.23	8564	8284	8013	7746	7480	6943	6379	5758	3975	-	
		1475	4.95	9083	8815	8554	8300	8047	7542	7021	6466	5102	-	
7 1/2	CM22YH__S ♦	1550	5.74	9600	9342	9092	8848	8606	8127	7639	7131	5968	4130	
		1610	6.44	10012	9761	9519	9282	9049	8587	8122	7642	6584	5176	
		1685	7.38	10525	10284	10050	9822	9598	9155	8713	8263	7299	6139	

UTILITY VENT SET CENTRIFUGAL FANS

Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CM shown herein are licensed to bear the AMCA Seal (except CM 10). The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

Ship Schedules:	
▲	3 Day Shipment From Stock
♦	10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL CM		Belt Driven Vent Set SWSI Arrangement #10 Class 1 Construction												
HP	Stock Number	RPM	Max BHP	CFM at Static Pressure (Inches w.g.)										
				1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	
1/2	CM24QH__S ♦	500	0.35	3035	-	-	-	-	-	-	-	-	-	-
		525	0.41	3383	1803	-	-	-	-	-	-	-	-	-
		555	0.48	3773	2756	-	-	-	-	-	-	-	-	-
3/4	CM24RH__S ♦	575	0.54	4022	3131	-	-	-	-	-	-	-	-	-
		640	0.74	4793	4103	3164	-	-	-	-	-	-	-	-
1	CM24SH__S ♦	650	0.78	4907	4237	3363	-	-	-	-	-	-	-	-
		675	0.87	5191	4561	3800	-	-	-	-	-	-	-	-
		700	0.97	5471	4874	4188	3181	-	-	-	-	-	-	-
1 1/2	CM24TH__S ♦	750	1.2	6021	5476	4885	4172	2960	-	-	-	-	-	-
		805	1.48	6615	6112	5588	5005	4283	-	-	-	-	-	-
2	CM24VH__S ♦	825	1.6	6828	6338	5833	5281	4626	-	-	-	-	-	-
		850	1.74	7094	6619	6133	5613	5019	-	-	-	-	-	-
		880	1.93	7410	6951	6487	5997	5456	3878	-	-	-	-	-
3	CM24WH__S ♦	925	2.25	7882	7444	7006	6553	6068	4864	-	-	-	-	-
		975	2.63	8401	7984	7570	7149	6708	5696	4067	-	-	-	-
		1020	3.00	8866	8465	8069	7671	7260	6355	5167	-	-	-	-
5	CM24XH__S ♦	1100	3.78	9685	9309	8941	8574	8203	7420	6520	5297	-	-	-
		1150	4.32	10194	9831	9478	9127	8775	8045	7239	6261	-	-	-
		1205	4.97	10751	10402	10063	9728	9393	8708	7976	7142	-	-	-
7 1/2	CM24YH__S ♦	1300	6.23	11707	11379	11061	10749	10439	9815	9168	8474	6726	-	
		1385	7.54	12557	12247	11945	11649	11357	10774	10182	9563	8150	5946	
10	CM24ZH__S ♦	1425	8.22	12956	12653	12358	12069	11785	11219	10646	10055	8739	6946	
		1475	9.12	13453	13158	12872	12592	12316	11769	11219	10656	9435	7915	
		1520	9.97	13900	13612	13333	13060	12791	12259	11727	11186	10034	8669	

Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CM shown herein are licensed to bear the AMCA Seal (except CM 10). The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

Ship Schedules:
▲ 3 Day Shipment From Stock
♦ 10 Day Shipment

How to order:

Model Number	Motor HP	RPM	Phase	UL	Stock
Example: CM24	P	H	1	U	S
CM24	P=1/3 Q=1/2 R=3/4 S=1 T=1 1/2 V=2 W=3 X=5 Y=7 1/2 Z=10	L=Low M=Medium H=High	1 or 3	U=cULus705 R=cULus762	S=Stock

Indicates Customer Provided Information

MODEL CM		Belt Driven Vent Set SWSI Arrangement #10 Class 1 Construction												
HP	Stock Number	RPM	Max BHP	CFM at Static Pressure (Inches w.g.)										
				1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	
27	1/2	CM27QH__S ♦	425	0.35	3243	-	-	-	-	-	-	-	-	-
			450	0.43	3787	-	-	-	-	-	-	-	-	-
			470	0.5	4185	2462	-	-	-	-	-	-	-	-
	3/4	CM27RH__S ♦	490	0.57	4561	3181	-	-	-	-	-	-	-	-
			510	0.65	4921	3720	-	-	-	-	-	-	-	-
			530	0.73	5268	4187	-	-	-	-	-	-	-	-
	1	CM27SH__S ♦	550	0.82	5607	4615	3148	-	-	-	-	-	-	-
			570	0.91	5937	5016	3795	-	-	-	-	-	-	-
			590	1.02	6261	5398	4322	-	-	-	-	-	-	-
	1 1/2	CM27TH__S ♦	625	1.21	6816	6033	5118	3872	-	-	-	-	-	-
			650	1.36	7203	6468	5631	4589	-	-	-	-	-	-
			675	1.52	7586	6890	6115	5197	3908	-	-	-	-	-
	2	CM27VH__S ♦	700	1.69	7963	7303	6578	5748	4702	-	-	-	-	-
			725	1.88	8336	7707	7025	6261	5352	-	-	-	-	-
			745	2.04	8633	8025	7373	6653	5820	-	-	-	-	-
	3	CM27WH__S ♦	775	2.3	9073	8496	7882	7215	6468	4343	-	-	-	-
			820	2.72	9726	9188	8623	8019	7362	5747	-	-	-	-
			850	3.04	10157	9643	9104	8535	7923	6486	-	-	-	-
	5	CM27XH__S ♦	900	3.6	10870	10389	9890	9367	8815	7575	5965	-	-	-
			950	4.24	11575	11124	10658	10174	9667	8561	7244	5352	-	-
			1010	5.09	12415	11994	11562	11115	10653	9664	8546	7187	-	-
	7 1/2	CM27YH__S ♦	1040	5.56	12833	12425	12008	11578	11134	10192	9145	7920	-	-
			1100	6.58	13663	13280	12889	12489	12077	11213	10277	9230	6297	-
			1160	7.71	14489	14128	13760	13384	13000	12200	11347	10418	8137	-
	10	CM27ZH__S ♦	1180	8.12	14763	14408	14048	13680	13303	12522	11693	10796	8645	-
			1225	9.09	15379	15038	14692	14340	13981	13238	12456	11621	9693	6852
			1270	10.13	15992	15665	15332	14995	14651	13943	13201	12417	10655	8355

UTILITY VENT SET CENTRIFUGAL FANS

Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.




AMCA WORLDWIDE CERTIFIED RATINGS
SOUND AND AIR PERFORMANCE
feg

JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CM shown herein are licensed to bear the AMCA Seal (except CM 10). The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

Ship Schedules:	
▲	3 Day Shipment From Stock
◆	10 Day Shipment

MODEL CM		Belt Driven Vent Set SWSI Arrangement #10 Class 1 Construction												
HP	Stock Number	RPM	Max BHP	CFM at Static Pressure (Inches w.g.)										
				1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	
30	3/4 CM30RH__S ♦	390	0.52	4512	-	-	-	-	-	-	-	-	-	-
		415	0.64	5213	-	-	-	-	-	-	-	-	-	-
		435	0.74	5732	4041	-	-	-	-	-	-	-	-	-
	1 CM30SH__S ♦	450	0.82	6105	4631	-	-	-	-	-	-	-	-	-
		465	0.91	6467	5136	-	-	-	-	-	-	-	-	-
		485	1.04	6938	5741	3740	-	-	-	-	-	-	-	-
	1 1/2 CM30TH__S ♦	500	1.14	7283	6162	4563	-	-	-	-	-	-	-	-
		525	1.32	7848	6822	5536	-	-	-	-	-	-	-	-
		550	1.52	8401	7449	6334	4656	-	-	-	-	-	-	-
2 CM30VH__S ♦	565	1.65	8728	7813	6771	5363	-	-	-	-	-	-	-	
	580	1.78	9052	8169	7187	5944	-	-	-	-	-	-	-	
	605	2.02	9588	8751	7847	6779	5233	-	-	-	-	-	-	
3 CM30WH__S ♦	620	2.17	9906	9094	8227	7233	5920	-	-	-	-	-	-	
	660	2.62	10746	9989	9203	8345	7340	-	-	-	-	-	-	
	695	3.06	11471	10755	10022	9244	8378	5851	-	-	-	-	-	
5 CM30XH__S ♦	720	3.41	11985	11294	10593	9859	9062	7001	-	-	-	-	-	
	770	4.16	13004	12357	11709	11043	10342	8721	6124	-	-	-	-	
	820	5.03	14013	13403	12797	12182	11547	10157	8397	-	-	-	-	
7 1/2 CM30YH__S ♦	840	5.41	14414	13818	13226	12629	12015	10691	9087	6474	-	-	-	
	890	6.43	15412	14846	14287	13727	13159	11963	10611	8893	-	-	-	
	940	7.58	16403	15865	15334	14806	14273	13172	11976	10587	-	-	-	
10 CM30ZH__S ♦	970	8.33	16995	16472	15957	15444	14930	13875	12749	11482	7479	-	-	
	1000	9.12	17586	17076	16575	16078	15580	14566	13497	12323	9127	-	-	
	1030	9.97	18174	17678	17190	16707	16225	15247	14227	13126	10356	-	-	

Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CM shown herein are licensed to bear the AMCA Seal (except CM 10). The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

Ship Schedules:
▲ 3 Day Shipment From Stock
♦ 10 Day Shipment



How to order:

Model Number	Motor HP	RPM	Phase	UL	Stock
Example: CM24	P	H	1	U	S
CM24	P=1/3 Q=1/2 R=3/4 S=1 T=1 1/2 V=2 W=3 X=5 Y=7 1/2 Z=10	L=Low M=Medium H=High	1 or 3	U=cULus705 R=cULus762	S=Stock

Indicates Customer Provided Information

MODEL CM		Belt Driven Vent Set SWSI Arrangement #10 Class 1 Construction												
HP	Stock Number	RPM	Max BHP	CFM at Static Pressure (Inches w.g.)										
				1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	
36	1	CM36SH__S ♦	340	0.59	5308	-	-	-	-	-	-	-	-	-
			380	0.86	6882	-	-	-	-	-	-	-	-	-
			400	1.01	7588	5732	-	-	-	-	-	-	-	-
	1 1/2	CM36TH__S ♦	420	1.18	8264	6656	-	-	-	-	-	-	-	-
			440	1.36	8919	7474	-	-	-	-	-	-	-	-
			460	1.55	9558	8231	6523	-	-	-	-	-	-	-
	2	CM36VH__S ♦	470	1.65	9872	8594	7014	-	-	-	-	-	-	-
			485	1.82	10338	9124	7687	-	-	-	-	-	-	-
			500	1.99	10798	9639	8310	-	-	-	-	-	-	-
	3	CM36WH__S ♦	525	2.3	11554	10472	9276	7820	-	-	-	-	-	-
			550	2.65	12299	11281	10183	8922	7255	-	-	-	-	-
			575	3.03	13035	12071	11050	9918	8561	-	-	-	-	-
	5	CM36XH__S ♦	600	3.44	13763	12846	11888	10851	9669	-	-	-	-	-
			640	4.17	14914	14061	13183	12256	11249	8660	-	-	-	-
			680	5.01	16051	15253	14438	13592	12697	10615	-	-	-	-
	7 1/2	CM36YH__S ♦	700	5.46	16615	15841	15054	14242	13389	11463	-	-	-	-
			740	6.45	17736	17005	16266	15511	14729	13026	10942	-	-	-
			785	7.7	18988	18299	17606	16903	16183	14654	12913	10672	-	-
	10	CM36ZH__S ♦	800	8.15	19402	18727	18048	17360	16658	15176	13514	11465	-	-
			830	9.11	20230	19579	18926	18266	17595	16195	14663	12876	-	-
			860	10.13	21053	20425	19796	19162	18519	17189	15758	14149	-	-

Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.

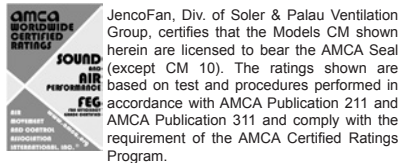

Ship Schedules:	
▲	3 Day Shipment From Stock
◆	10 Day Shipment

How to order:

Model Number	Motor HP	RPM	Phase	UL	Stock
Example: CM24	P	H	1	U	S
CM24	P=1/3 Q=1/2 R=3/4 S=1 T=1 1/2 V=2 W=3 X=5 Y=7 1/2 Z=10	L=Low M=Medium H=High	1 or 3	U=cULus705 R=cULus762	S=Stock

Indicates Customer Provided Information

UTILITY VENT SET CENTRIFUGAL FANS

Sound Characteristics

UTILITY VENT SET CENTRIFUGAL FANS

CM	RPM	Sound Performance Sones / LwA (Inches w.g.)										
		0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	
CM 10	1500	5.7 / 64.2	-	-	-	-	-	-	-	-	-	-
	1875	9.5 / 72.1	8.2 / 69.5	-	-	-	-	-	-	-	-	-
	2250	14.4 / 78.7	12.2 / 76.0	11.4 / 74.6	11.1 / 73.2	-	-	-	-	-	-	-
	2625	19.1 / 83.5	17.1 / 81.5	15.7 / 80.0	15.0 / 79.1	14.6 / 78.1	-	-	-	-	-	-
CM 12	1450	10.2 / 73.3	8.8 / 70.4	-	-	-	-	-	-	-	-	-
	1850	17.6 / 81.9	14.8 / 79.2	13.7 / 77.5	13.1 / 76.3	-	-	-	-	-	-	-
	2275	25 / 88.0	24 / 86.8	21 / 85	20 / 84	19.6 / 83.1	19.3 / 82.4	-	-	-	-	-
	2700	34 / 92.8	34 / 92.6	31 / 91.3	29 / 90.0	28 / 89.3	27 / 88.6	26 / 87.9	26 / 87.5	26 / 87.2	-	-
CM 14	1100	7.7 / 68.7	-	-	-	-	-	-	-	-	-	-
	1500	14.4 / 79.0	12.5 / 76.8	11.3 / 74.8	-	-	-	-	-	-	-	-
	1900	23 / 86.3	21 / 85.1	19.3 / 83.9	18.0 / 82.8	17.0 / 81.7	15.5 / 79.4	-	-	-	-	-
	2300	32 / 92.2	30 / 91.3	29 / 90.6	28 / 90.1	26 / 89.4	25 / 88.8	25 / 88.4	23 / 87.5	-	-	-
	2700	41 / 96.2	40 / 95.6	38 / 95.0	37 / 94.5	36 / 94.1	34 / 93.6	33 / 93.1	32 / 92.6	31 / 92.2	31 / 91.8	-
CM 16	1150	11.6 / 75.3	9.4 / 71.6	-	-	-	-	-	-	-	-	-
	1450	19.3 / 83.5	16.1 / 80.7	14.2 / 78.5	12.4 / 75.9	-	-	-	-	-	-	-
	1800	29 / 90.1	27 / 88.9	24 / 87.1	22 / 85.5	20 / 84.4	18.5 / 82.6	-	-	-	-	-
	2150	39 / 95.1	39 / 94.8	35 / 93.5	32 / 92.2	30 / 91.1	28 / 90.1	27 / 89.4	26 / 88.4	24 / 86.8	23 / 85.5	-
CM 18	1025	12.3 / 75.4	9.5 / 71.5	-	-	-	-	-	-	-	-	-
	1350	23 / 85.2	19.9 / 83.2	16.9 / 80.7	14.6 / 78	14.4 / 76.9	-	-	-	-	-	-
	1650	31 / 90.4	29 / 89.6	26 / 88.1	24 / 86.5	21 / 84.8	19.4 / 83	18.4 / 81.4	-	-	-	-
	2000	42 / 95.8	40 / 95.4	39 / 94.7	36 / 93.7	34 / 92.7	32 / 91.6	30 / 90.5	28 / 89.2	26 / 88.0	25 / 86.7	-
CM 20	775	8.4 / 69.7	-	-	-	-	-	-	-	-	-	-
	1050	17.3 / 81	13.9 / 77.7	12.2 / 74.8	-	-	-	-	-	-	-	-
	1300	27 / 88.4	24 / 86.3	21 / 84.4	19.7 / 82.9	18.0 / 81	-	-	-	-	-	-
	1550	37 / 93.2	34 / 92.2	31 / 90.6	28 / 89.2	27 / 88.1	25 / 87.1	24 / 85.7	22 / 84.1	-	-	-
	1825	47 / 97.5	45 / 96.9	43 / 96.0	39 / 94.9	36 / 93.7	35 / 92.9	33 / 92.2	32 / 91.3	31 / 90.5	29 / 89.3	-
CM 22	575	5.7 / 62.7	-	-	-	-	-	-	-	-	-	-
	825	13.1 / 76.4	10.6 / 72.9	-	-	-	-	-	-	-	-	-
	1225	30 / 89.7	27 / 88.2	24 / 86.4	22 / 84.9	21 / 83.3	19.8 / 82.1	-	-	-	-	-
	1600	46 / 96.9	45 / 96.7	42 / 95.8	40 / 94.7	37 / 93.7	35 / 92.8	33 / 91.9	32 / 91.0	31 / 90.2	30 / 89.4	-
CM 24	500	5.2 / 61.9	-	-	-	-	-	-	-	-	-	-
	825	17.6 / 81.4	14.3 / 78.4	12.1 / 75.2	-	-	-	-	-	-	-	-
	1175	34 / 92.1	32 / 91.4	29 / 90.1	26 / 88.5	24 / 86.8	23 / 85.5	20 / 83.2	-	-	-	-
	1500	50 / 98.6	50 / 98.3	48 / 97.9	45 / 97.1	42 / 96.4	40 / 95.4	37 / 94.4	35 / 93.3	34 / 92.5	33 / 91.7	-
CM 27	450	5.6 / 62.1	-	-	-	-	-	-	-	-	-	-
	750	18.9 / 82.5	15.6 / 79.4	12.9 / 75.9	-	-	-	-	-	-	-	-
	1025	32 / 91.6	31 / 91.0	28 / 89.5	25 / 87.9	23 / 86.0	21 / 83.9	19.8 / 82.5	-	-	-	-
	1300	48 / 98.2	47 / 98.0	47 / 97.7	44 / 96.9	41 / 96.0	39 / 95.0	36 / 93.9	34 / 92.7	31 / 91.3	30 / 90.1	-
CM 30	400	5.6 / 62.2	-	-	-	-	-	-	-	-	-	-
	550	12.7 / 75.7	9.5 / 70.8	-	-	-	-	-	-	-	-	-
	775	26 / 87.5	22 / 85.3	19.4 / 82.8	17.2 / 80.5	16.3 / 78.9	-	-	-	-	-	-
	1025	43 / 96.0	41 / 95.1	38 / 93.9	34 / 92.6	32 / 91.1	29 / 89.7	28 / 88.4	27 / 87.4	27 / 87.4	-	-
CM 36	425	9.1 / 69.9	-	-	-	-	-	-	-	-	-	-
	575	19.8 / 82.1	16.0 / 78.3	13.1 / 75.0	-	-	-	-	-	-	-	-
	725	32 / 89.8	28 / 87.7	25 / 85.5	22 / 83.5	20.0 / 81.3	-	-	-	-	-	-
	875	43 / 95.2	40 / 94.2	37 / 92.5	33 / 90.9	31 / 89.7	29 / 88.2	26 / 86.6	26 / 85.4	-	-	-

The A-weighted sound ratings shown have been calculated per AMCA standard 301. Values shown are for inlet Lwi(A) sound power levels for installation type B - free inlet, ducted outlet. Ratings do not include the effect of duct end corrections.




JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models CM shown herein are licensed to bear the AMCA Seal (except CM 10). The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL RCXII/RCXII-SF

GRAVITY RELIEF/INTAKE VENTILATOR


RCXII-SF = SELF FLASHING



RCXII
(sizes 6-20)



RCXII
(sizes 24-36)



RCXII-SF
(sizes 6-20)

APPLICATION

Relief and intake ventilators are used to exhaust (relief) or supply (intake) air from or to an enclosed area without the need for a power operated fan. They rely on a difference in static pressure inside and outside the area to create an air flow through the ventilator from the area of higher pressure to the area of lower pressure. If the enclosed area is under a negative pressure, air will flow into the enclosed area (intake). If the enclosed area has a positive pressure, air will flow from it to the outside (relief).

These units can also operate as gravity ventilators, allowing air to flow from an enclosed area using the "Stack Effect". The amount of air flow will depend on the temperature difference inside and outside the area and the height difference between the ventilator and the outside air intake to the area.

CONSTRUCTION - RCXII


- Low contour spun aluminum hood for attractive appearance.
- All heavy-gauge aluminum construction.
- Weather resistant design for long life and maintenance free operation.
- Galvanized bird screen is standard.
- One piece curb with spun inlet for maximum efficiency.
- Shipped completely assembled for ease in installation.

CONSTRUCTION - RCXII-SF


- Low contour spun aluminum hood for attractive appearance.
- All heavy-gauge aluminum construction.
- Weather resistant design for long life and maintenance free operation.
- Galvanized bird screen is standard.
- Shipped completely assembled for ease in installation.

DIMENSIONAL DATA

RCXII (sizes 6-20)




RCXII-SF



Size	A	B (RCXII)	C (RCXII)	D (RCXII)	B (SF)	C (SF)	D (SF)	Avg. Ship Wt. (lbs.)
06	7	16.5	8	18	18	10	14	7
08	9	16.5	10	18	18	12	14	12
10	11	24	10	25	24	14	20	12
12	13	24	10	25	24	16	20	12
14	15	24	12	32	28	18	27	15
16	17	24	14	32	28	20	27	20
18	19	29.5	14	32	28	22	27	30
20	21	29.5	16	36	32	22	30	30

RCXII (sizes 24-36)

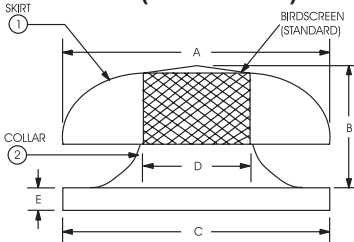

Size	Neck Area sq. ft.	A	B	C	D	E	Avg. Ship Wt. (lbs.)
24	3.30	43-3/4	12-1/2	35-1/2	24-5/8	2	40
26	3.69	43-3/4	17-3/8	35-1/2	26	2	40
30	5.16	43-3/4	17-3/8	42-1/2	30-3/4	2	45
33	5.94	54-3/4	17-3/8	42-1/2	33	2	75
36	7.06	54-3/4	17-3/8	42-1/2	36	2	90

ACCESSORIES

MODEL RCXII	12" HIGH ROOF CURB		115V MOTORIZED DAMPER		AUTOMATIC GRAVITY DAMPER	
	OD	STOCK NO.	OD	STOCK NO.	OD	STOCK NO.
6-8	14 3/4	611214 ●	8	2401.M0808 ●	8	2401.0808 ●
10-16	22 1/4	611222 ●	15	2401.M1515 ●	15	2401.1515 ●
18-20	27 1/4	611227 ●	21	2401.M2121 ●	21	2401.2121 ●
24-26	33 3/4	611233 ▲	27	2401.M2727 ▲	27	2401.2727 ▲
30-33-36	40 3/4	611240 ▲	34	2401.M3434 ▲	34	2401.3434 ▲

Dampers and motor kits ship separate - for field assembly.

CAUTION: Motors are not suitable for explosive or flammable environments

Ship Schedules:
● Next Day Shipment From Stock
▲ 3 Day Shipment From Stock
◆ 10 Day Shipment

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS. OD IS OUTSIDE DIMENSION OF SQUARE CURB AND DAMPER. DUE TO CONTINUING RESEARCH, JencoFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

GRAVITY VENTILATORS

Models RCXII (sizes 6-20) and Models RCXII-SF

MODEL RCXII Gravity Relief Ventilator

MODEL	THROAT AREA FT. ²	CFM Static Pressure									STOCK NO. RCXII	STOCK NO. RCXII-SF
		.025	.050	.100	.125	.150	.200	.250	.300	.350		
6	0.3	93	131	185	207	227	262	293	320	346	RCXII06S ●	RCXII06SFS ●
8	0.4	221	313	442	494	541	625	699	766	827	RCXII08S ●	RCXII08SFS ●
10	0.7	297	420	594	664	727	840	939	1029	1111	RCXII10S ●	RCXII10SFS ●
12	0.9	493	697	986	1102	1208	1394	1559	1708	1845	RCXII12S ●	RCXII12SFS ●
14	1.2	604	853	1207	1349	1478	1707	1908	2091	2258	RCXII14S ●	RCXII14SFS ●
16	1.6	746	1055	1492	1668	1827	2110	2359	2584	2791	RCXII16S ●	RCXII16SFS ●
18	2.0	919	1300	1838	2055	2251	2599	2906	3184	3439	RCXII18S ●	RCXII18SFS ●
20	2.4	1127	1593	2253	2519	2759	3186	3562	3902	4215	RCXII20S ●	RCXII20SFS ●

MODEL RCXII Gravity Intake Ventilator

MODEL	THROAT AREA FT. ²	CFM Static Pressure									STOCK NO. RCXII	STOCK NO. RCXII-SF
		.025	.050	.100	.125	.150	.200	.250	.300	.350		
6	0.3	64	91	128	143	157	181	202	222	239	RCXII06S ●	RCXII06SFS ●
8	0.4	148	209	296	331	363	419	468	513	554	RCXII08S ●	RCXII08SFS ●
10	0.7	202	286	404	452	495	571	639	700	756	RCXII10S ●	RCXII10SFS ●
12	0.9	330.5	467	661	739	810	935	1045	1145	1237	RCXII12S ●	RCXII12SFS ●
14	1.2	440.5	623	881	985	1079	1246	1393	1526	1648	RCXII14S ●	RCXII14SFS ●
16	1.6	552	781	1104	1234	1352	1561	1746	1912	2065	RCXII16S ●	RCXII16SFS ●
18	2.0	707.5	1001	1415	1582	1733	2001	2237	2451	2647	RCXII18S ●	RCXII18SFS ●
20	2.4	856	1211	1712	1914	2097	2421	2707	2965	3203	RCXII20S ●	RCXII20SFS ●

*Insect Screens - Add .10 to area shown in table.
Damper - Add .10 to area shown in table.*

Model RCXII (sizes 24-36)

MODEL RCXII Gravity Relief Ventilator

MODEL	THROAT AREA FT. ²	CFM Static Pressure								STOCK NO. RCXII
		.03	.06	.09	.125	.150	.20	.25	.30	
24	3.30	1535	2168	2656	3128	3429	3960	4425	4851	RCXII24S ▲
26	3.69	1716	2424	2970	3498	3834	4428	4948	5424	RCXII26S ▲
30	5.16	2399	3390	4154	4892	5361	6192	6920	7585	RCXII30S ▲
33	5.94	2762	3903	4782	5631	6172	7128	7966	8732	RCXII33S ▲
36	7.06	3283	4638	5683	6693	7335	8472	9467	10378	RCXII36S ▲

MODEL RCXII Gravity Intake Ventilator

MODEL	THROAT AREA FT. ²	CFM Static Pressure								STOCK NO. RCXII
		.03	.06	.09	.125	.150	.20	.25	.30	
24	3.30	1376	1944	2383	2808	3076	3551	3969	4346	RCXII24S ▲
26	3.69	1539	2173	2664	3140	3439	3970	4439	4860	RCXII26S ▲
30	5.16	2152	3039	3726	4391	4809	5552	6207	6796	RCXII30S ▲
33	5.94	2476	3499	4289	5055	5536	6391	7146	7823	RCXII33S ▲
36	7.06	2944	4158	5097	6008	6580	7597	8493	9298	RCXII36S ▲


*Shaded selections are over recommended 650 FPM. Pick next larger size or use optional weather screen.
Insect Screens - Add .10 to area shown in table.
Damper - Add .10 to area shown in table.*

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

GRAVITY VENTILATORS

MODEL FF/FFC

CEILING AND INLINE/CABINET VENTILATORS



APPLICATION

The extremely quiet FF and FFC ventilators are used to exhaust air from a variety of commercial and institutional applications, such as restrooms, conference rooms, offices, storage areas, restaurants, retail stores, schools, and similar buildings... anywhere quiet, high-capacity ventilation is needed.

The forward curved centrifugal wheel with its high static pressure capability makes these ventilators suitable for either ducted or nonducted applications. They include removable blower assemblies and plug-in permanently lubricated motors for ease of servicing and cleaning.



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models FF/FFC shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

MODEL FF		Ceiling Ventilator											Ventilator with Motor, Grille & Backdraft Damper		
MODEL FF	AMPS @ 60HZ/ WATTS	RPM @ 1/8	CFM / Sones at Static Pressure											Average Ship Wt. Lbs	120/1/60 STOCK NO.
			0	1/10	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1			
50	0.8/48	1870	52	49	47	42	29	-	-	-	-	-	4	FF50 ●	
			3.9	4.3	4.4	4.6	5.5	-	-	-	-	-			
80	0.75/48	1280	89	81	80	68	36	-	-	-	-	-	7	FF80 ●	
			3.9	3.8	3.8	3.8	3.9	-	-	-	-	-			
100	1.1/87	640	136	115	109	93	80	65	44	12	-	-	23	FF100 ●	
			0.5	0.8	0.9	1.3	1.8	2.3	3.0	3.2	-	-			
150	1.3/100	710	181	161	157	141	132	124	114	94	62	-	23	FF150 ●	
			1.3	1.4	1.5	2.2	2.6	3.1	3.6	4.1	4.6	-			
200	1.8/127	740	231	214	210	196	186	177	165	144	113	51	23	FF200 ●	
			1.6	1.8	1.7	2.3	2.9	3.5	4.1	4.9	5.3	5.3			
250	2.1/166	830	272	261	259	250	242	233	218	201	165	99	23	FF250 ●	
			2.1	2.3	2.2	2.9	3.3	3.9	4.4	4.8	5.5	5.8			
300	2.6/212	905	312	309	308	303	296	287	273	254	219	125	23	FF300 ●	
			2.8	2.9	2.9	3.3	3.5	3.9	4.3	4.7	5.1	5.6			
400	1.4/146	735	480	442	434	388	344	299	229	182	114	33	34	FF400 ●	
			2.0	2.4	2.3	2.8	3.3	3.8	4.5	4.8	5.4	5.6			
500	2.2/232	810	538	520	514	491	463	434	389	339	282	186	34	FF500 ●	
			3.0	3.1	3.3	3.6	4.0	4.4	5.0	5.7	6.2	6.7			
700	2.9/313	960	722	704	701	667	640	607	571	534	453	333	34	FF700 ●	
			4.5	4.6	4.7	4.8	5.0	5.2	5.6	6.2	7.1	7.2			
900	3.0/306	650	918	905	901	877	842	793	725	636	536	390	64	FF900 ●	
			3.8	4.0	4.1	4.0	4.2	4.3	4.4	4.9	4.5	5.3			
1500	5.0/468	955	1578	1526	1513	1438	1371	1285	1198	1103	1000	816	64	FF1500 ●	
			8.6	8.4	8.4	8.1	7.5	7.0	6.7	6.2	5.8	5.8			

Performance ratings include the effects of inlet grille and backdraft damper in the airstream. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5' (1.5m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation Type B: free inlet fan sone levels. Performance certified is for installation Type B: Free inlet, Ducted outlet.

Ship Schedules:
● Next Day Shipment From Stock

CEILING/CABINET FANS

DUE TO CONTINUING RESEARCH, JencOFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL FF/FFC cont'd

CONSTRUCTION

Housing

- Rugged, 20 gauge galvanized steel.
- Duct connector.
- 1/2" acoustic insulation inside (except FF50, FF80 & FFC's).
- Integral automatic backdraft damper.
- Easy inline conversion available (FF100-FF1500).
- Mounting brackets for easy installation and adaptability to numerous mounting requirements.
- Factory shipped in horizontal discharge position easily converted to vertical discharge.
- FFC inline units have a removable panel which allows for easy motor access without disturbing duct work.

Blower

- Low RPM for quiet operation, speed controllable.
- Resilient anti-vibration mounts (FF50 & FF80 rigid mount).
- Balanced, polymeric, centrifugal blower wheel for quiet, efficient performance. (Metal wheel on FFC2000 & FFC3500).
- Permanently lubricated, thermally protected motor.
- Plug in motor designed for continuous operation.

Grille

- Conceals interior.
- Low profile styling, blends with any decor.
- White polymeric (FF50 - FF300).
- Metal finished with white enamel (FF400 - FF1500).

ACCESSORIES

- Complete selection available, see pages 65-66.



JencoFan, Div. of Soler & Palau Ventilation Group, certifies that the Models FF/FFC shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

CEILING/CABINET FANS

MODEL FFC		Inline/Cabinet Ventilators											Ventilator with Motor and Duct Connectors						
MODEL FFC	AMPS @ 60HZ/ WATTS	RPM @ 1/8	CFM / Sones at Static Pressure										Average Ship Wt. Lbs.	120/1/60 STOCK NO.					
			0	1/10	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1							
100	1.0/87	760	121	108	106	97	93	86	70	44	17	-	23	FFC100 ●					
			0.5	0.7	0.7	1.1	1.4	1.8	2.1	2.4	2.6	-							
150	1.3/100	920	153	148	147	140	134	125	111	91	54	18		34	FFC150 ●				
			0.9	1.0	1.1	1.4	1.6	1.9	2.1	2.2	2.4	2.6							
200	1.8/127	865	205	196	195	190	185	175	158	135	96	47			64	FFC200 ●			
			1.7	1.9	1.9	2.1	2.3	2.4	3.0	3.3	3.4	3.4							
250	2.1/166	1005	248	245	245	241	235	224	208	183	141	84				64	FFC250 ●		
			2.0	2.3	2.3	2.8	2.8	3.2	3.4	3.6	3.9	3.8							
300	2.6/212	1145	300	294	293	285	274	259	243	214	168	113					64	FFC300 ●	
			2.9	3.0	3.1	3.3	3.4	3.5	3.6	3.7	4.0	3.9							
400	1.4/146	775	450	415	406	360	313	271	223	167	90	6.0						64	FFC400 ●
			1.4	1.6	1.6	1.9	2.2	2.6	2.9	3.4	3.6	3.9							
500	2.2/232	890	546	526	519	496	472	447	407	364	306	232	64						FFC500 ●
			2.4	2.4	3.4	3.7	3.9	3.8	3.9	4.0	4.3	4.3							
700	2.9/313	1090	704	686	681	656	631	604	575	533	480	412		64					FFC700 ●
			3.6	3.8	3.7	3.9	4.0	4.2	4.3	4.4	4.7	5.0							
900	3.0/306	810	930	902	894	853	807	754	685	587	442	300			64				FFC900 ●
			3.7	3.8	3.8	3.8	3.7	3.8	3.9	4.0	4.0	4.1							
1500	5.0/468	1055	1275	1228	1214	1152	1092	1029	958	871	764	631				64			FFC1500 ●
			6.8	6.8	6.7	6.5	6.3	6.0	6.0	6.0	6.0	6.1							

Performance ratings include the effects of backdraft damper in the airstream. Speed (RPM) shown is nominal. Performances based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5" (1.5m) in a hemispherical free field calculated per AMCA Std. 301. Values shown are for installation Type D; Ducted inlet, Ducted outlet. Ratings do not include the effect of duct end correction. Performance ratings include the effects of 18 feet of round inlet duct and, if needed, a rectangular to round duct transition in the airstream. Performance certified is for Installation Type D; Ducted inlet, Ducted outlet.

MODEL FFC		Inline/Cabinet Ventilators										Ventilator with Motor and Duct Connectors		
MODEL FFC	AMPS @ 60HZ/ WATTS	RPM @ 1/8	CFM / Sones at Static Pressure										Average Ship Wt. Lbs.	120/1/60 STOCK NO.
			0	1/10	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1		
2000	5.8/590	965	1891	1803	1791	1657	1508	1347	1165	808	284	-	92	FFC2000 ●
			10.3	9.8	9.4	9.0	8.6	9.1	8.9	7.0	6.7	-		


Performance ratings do not include the effects of appurtenances in the airstream. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5' (1.5m) in a hemispherical free field calculated per AMCA Std. 301. Values shown are for installation Type D; Ducted inlet, Ducted outlet. Ratings do not include the effect of duct end correction. Performance certified is for Installation Type D; Ducted inlet, Ducted outlet.

DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.


Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

DIMENSIONAL DATA - CEILING VENTILATOR


FF50




FF80




FF100 & 150




FF200, 250 & 300



FF400, 500 & 700




FF900 & 1500




Inline/Cabinet Ventilator


FFC100 & 150




FFC200, 250 & 300

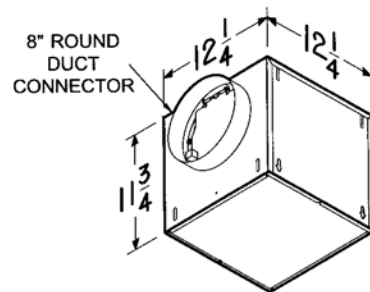


FFC400, 500 & 700

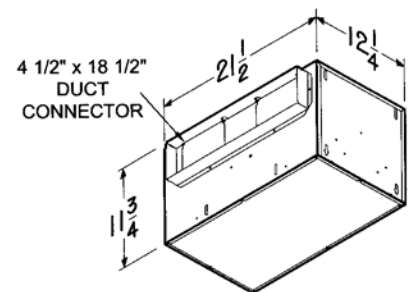

FFC900 & 1500

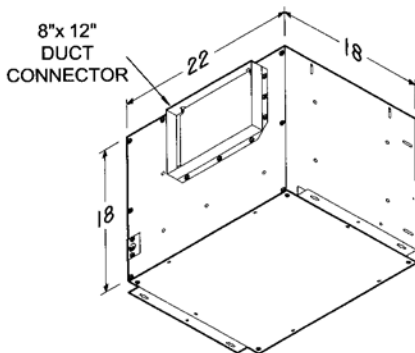


FFC2000

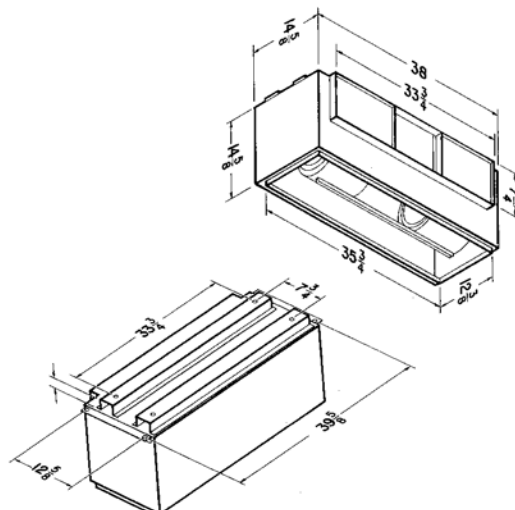

CEILING/CABINET FANS


Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

ACCESSORIES




961L In-Line Adaptor Kit

- Galvanized steel
- Fits FF100 & FF150
- For 6" round duct intake




982L In-Line Adaptor Kit

- Galvanized steel
- Fits FF400, FF500 & FF700
- 4 1/2 x 18 1/2" duct intake




981L In-Line Adaptor Kit

- Galvanized steel
- Fits FF200, FF250 & FF300
- For 8" round duct intake




983 In-Line Adaptor Kit

- Galvanized steel
- Fits FF900 & FF1500
- 8" x 12" round duct intake




Model 441 Wall Cap

- Gravity dampers
- Collar with birdscreen for attaching 10" round duct
- Steel construction with aluminum louvers




Model 613 Wall Cap

- High Capacity
- Built-in backdraft damper & birdscreen
- Aluminum natural finish
- For 12" round duct




Model 641 Wall Cap

- Aluminum natural finish
- Built-in backdraft damper & birdscreen
- For 6" round duct

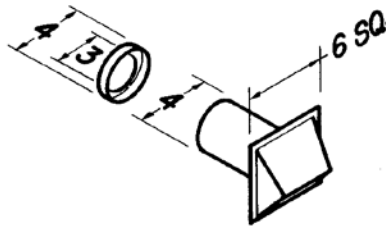


Model 642 Wall Cap

- Aluminum natural finish
- Built-in backdraft damper & birdscreen
- For 3" or 4" round duct (4" to 3" transition included)




Model 643 Wall Cap

- Aluminum natural finish
- Built-in backdraft damper
- For 8" round duct




Model 437 Roof Cap

- High capacity design - up to 1200 CFM
- Built-in birdscreen
- Steel, black electrically - bonded epoxy finish



Model 636 Roof Cap

- Black electrically - bonded epoxy finish
- Built-in backdraft damper & birdscreen
- For 3" or 4" round duct



Model 634 Roof Cap


- Black electrically - bonded epoxy finish
- Built-in backdraft damper & birdscreen
- For 3 1/4" x 10" or up to 8" round duct

Model 636AL - Aluminum

Model 644 - Aluminum


CEILING/CABINET FANS

ACCESSORIES




Speed Control

- Adjust speed from 100 to 50%
- 3 amp, 5 amp & 10 amp - 120V
- 6 amp - 240V




Model RCXIIF08 Flat Roof Cap

- For flat roof installation
- Spun Aluminum - natural finish
- Built-in birdscreen
- For up to 8" round duct




Model RCXII08 Curb Mount Roof Cap

- For curb mount installation
- Use 14-3/4" x 14-3/4" x 12" high curb
- Spun Aluminum - natural finish
- Built-in birdscreen
- For up to 8" round duct




Model RCXIIF12 Flat Roof Cap

- For flat roof installation
- Spun Aluminum - natural finish
- Built-in birdscreen
- For up to 12" round duct




Model RCXII12 Curb Mount Roof Cap

- For curb mount installation
- Use 22-1/4" x 22-1/4" x 12" high curb.
- Spun Aluminum - natural finish
- Built-in birdscreen
- For up to 12" round duct




Model MG 1 Metal Grille Kit

- White enamel painted steel
- Mounting screws included
- Fits FF100, FF150, FF200, FF250 & FF300

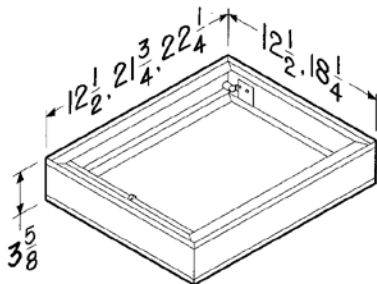



Models RD1, RD2 & RD3 Radiation Dampers

- UL rated for use in 1, 2 or 3 hour rated floor-ceiling, roof-ceiling design
- Galvanized steel frame
- High temperature, non-asbestos, reinforced fiber thermal fabric
- 212°F fusible link
- Stainless steel negator-type closure spring
- RD1 (12 1/4" x 12 1/4") fits FF100 - FF300
- RD2 (21 1/2" x 18") fits FF400 - FF700
- RD3 (22" x 18") fits FF900 - FF1500



Model RD80 Radiation Damper

- UL rated for use in 1, 2 or 3 hour rated floor-ceiling, roof-ceiling design
- Galvanized steel frame
- High temperature, non-asbestos, reinforced fiber thermal fabric
- 165°F fusible link
- Stainless steel closure springs
- RD80 fits FF80



Models 423 & T81212 Duct Transitions

- Galvanized steel
- Allows for quick transition to easy-to-obtain-and-install round ducting
- 423 (4 1/2" x 18" to 10" round) for use with FF400 thru FF700
- T81212 (8" x 12" to 12" round) for use with FF900 and FF1500

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL FF/FFC

Optional Accessory Compatibility Chart

Ceiling & Inline/Cabinet Ventilators

STOCK NO.	CEILING MOUNT MODEL FF							IN-LINE/CABINET MODEL FFC					
VARIABLE SPEED CONTROLS	FF50 FF80	FF100 FF150	FF200 FF250 FF300	FF400 FF500	FF700	FF900	FF1500	FFC100 FFC150	FFC200 FFC250 FFC300	FFC400 FFC500 FFC700	FFC900	FFC1500	FFC2000
2727.1 (5 AMP 120V) ●	X	X	X	X			X	X					
2828.1 (10AMP 120V) ●		X	X	X	X	X	X	X	X	X	X	X	X
ROOF CAPS													
437 ♦				X	X					X			
RCXII08SFS, RCXII08S ●	X	X	X					X	X				
RCXII12SFS, RCXII12S ●				X	X	X	X			X	X	X	X
634 ●		X	X					X	X				
636 ●	X												
RCXII18S ●													X
RCXII20S ●													X
ROOF CURBS FOR RCXII08 & RCXII12													
611214 ●	X	X	X					X	X				
611222 ●				X	X	X	X			X	X	X	X
WALL CAPS													
441 ♦				X	X					X			
613 ♦						X	X				X	X	
641 ●		X						X					
642 ♦													
643 ●			X						X				
IN-LINE ADAPTERS													
961L ♦		X											
981L ♦			X										
982L ♦				X	X								
983L ♦						X	X						
UL RADIATION DAMPERS													
RD1 ♦		X	X										
RD2 ♦				X	X								
RD3 ♦						X	X						
RD80 ♦	X (FF80 only)												
METAL Grille KIT													
G102 ♦													X
MG1 ●		X	X										
DUCT TRANSITIONS													
423 ●				X	X					X			
T81212 ●						X	X				X	X	
DAMPER KITS													
D100 ●													X
VIBRATION DAMPENING HANGERS (4)													
v102 ●		X	X	X	X	X	X	X	X	X	X	X	X
HEAVY DUTY													
v104 ●		X	X	X	X	X	X	X	X	X	X	X	X

Ship Schedules:

- Next Day Shipment From Stock
- ♦ 10 Day Shipment

CEILING/CABINET FANS

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODELS IF AND HP INDUSTRIAL CEILING FANS

APPLICATION

- All models are ideal for factories, warehouses, retail stores & garages
- The WR water resistant and high performance is ideal agricultural, greenhouse and high moisture application
- Heat de-stratification.
- Insect control
- Air curtain for shipping doors
- Employee, machine and compressor cooling
- By removing hot air from the ceiling you can increase light & ballast life

FEATURE AND BENEFITS

- Sealed bearings no maintenance required
- Extra 24" lead wires coming out of fan for easy adapting to longer downrods
- 24" stainless steel safety cable
- Low energy consumption maintenance free motors
- 24" standard downrod length
- Painted aluminum blades
- WR series has water resistant motors
- Quiet operation
- UL approved



IF - Series



HP - Series



MODEL (STOCK NO.)	SIZE	AIRFLOW	MAX RPM	AIR VELOCITY 5' FROM FAN	CFM	WATTS H/L	AMPS	DOWNROD LENGTH	WEIGHT
IF48C ●	48	Downdraft	320	700	18000	70/20	0.7	24	20
HPWR56 ●	56	Downdraft	319	660	28000	110/30	0.95	24	27
HPWR60 ●	60	Forward/Reverse	292	650	28000	110/30	0.95	24	29

Ship Schedules:

- Next Day Shipment From Stock

CEILING/CABINET FANS

ALL DIMENSIONS IN INCHES, WEIGHTS IN POUNDS.

DUE TO CONTINUING RESEARCH, Jencofan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL 411

AUTO EXHAUST DAMPER

Models 411 are a non-flanged horizontal mount exhaust backdraft damper. The frame is galvanized steel with aluminum blades. The blades have a felt seal on the leading edge for quiet closing and better protection from the weather. Spring assisted to allow blades to open quickly. Ideal for use in roof curbs, duct work, or wall collars when using a fan or power roof ventilator. Only available for horizontal mount exhaust applications.

Sizes available – 8" W x 8" H to 30" W x 30" H.

Maximum free area velocity – 2,000 fpm.



FEATURES

Frame

- Frame is Galvanized Steel.
- Conduit knockout provided for ease of electrical hook up.
- Easy to motorize. (order 411611 motor pack)
- 2" deep frame.

Blades

- Blades are 26 gauge Mill Finish Aluminum
- Blades open freely to allow full opening and closing.
- Felt seal on leading edge of blades for quiet closing and better protection from the weather.
- Nylon bushings and stainless steel pivot pins
- Tie rod attached to all blades for simultaneous opening.
- Spring assist to allow blades to open quickly.

Ratings

- Maximum recommended velocity is 2000 FPM Pressure- 1.0 in w.g - differential pressure
- Temperature -40°F to 180°F



Options

- Motor packs.



MODEL 411

AUTO EXHAUST DAMPER

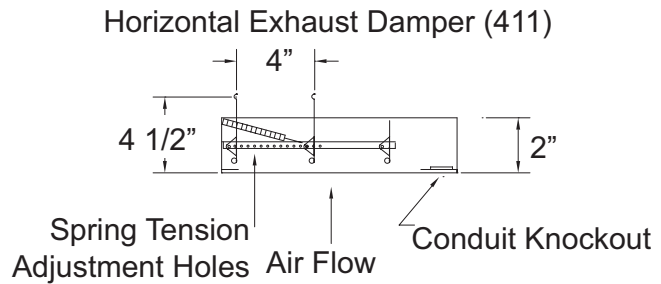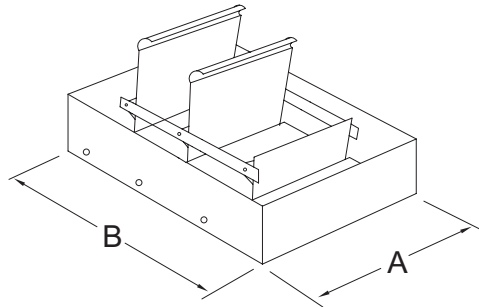

STANDARD SIZES

Dimensions in Inches

Part No.	Overall Frame Dimensions (W x H)	Free Area Dimensions (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	Est. Shipping Weight (lbs)
411008 ●	7.75 x 7.75	6.125 x 7.25	.42	.31	2
411009 ●	8.75 x 8.75	6.50 x 7.25	.53	.33	2.5
411010 ●	9.75 x 9.75	7.125 x 8.25	.66	.41	2.5
411011 ●	10.75 x 10.75	8.50 x 9.25	.80	.55	3
411012 ●	11.75 x 11.75	9.125 x 10.25	.96	.65	3.50
411014 ●	13.75 x 13.75	11.125 x 12.25	1.51	.95	4
411016 ●	15.75 x 15.75	13.125 x 14.25	2.19	1.30	4
411018 ●	17.75 x 17.75	15.125 x 16.25	2.44	1.71	4.5
411019 ●	18.75 x 18.75	16.125 x 17.25	2.71	1.93	4.5
411020 ●	19.75 x 19.75	17.125 x 18.25	3.29	2.17	5
411022 ●	21.75 x 21.75	19.125 x 20.25	3.59	2.69	5
411024 ●	23.75 x 23.75	21.125 x 22.25	3.92	3.26	6
411026 ●	25.75 x 25.75	23.125 x 24.25	4.60	3.89	7
411028 ●	27.75 x 27.75	25.125 x 26.25	5.35	4.58	7.5
411030 ●	29.75 x 29.75	27.125 x 28.25	6.15	5.32	8

Note: Dimensions are approximate due to normal tolerances in the manufacturing process. Estimated Free Area calculation is based upon the following formula: $MD[A+B+(N \times C)]/144$. Free Area x FPM = CFM; actual performance may vary.

Optional 411611 Motor Pack Specifications

Motor Pack Part Number	Power Supply Required	Running AMPS	Stall Torque	Lead Length	Installed Unit Dimension		
					H	W	D
411611 ●	115/230V, 60 Hz	.11/07	77 in. lbs.	6"	8.5	4.5	7.375

Ship Schedules:
● Next Day Shipment From Stock

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL 611

AUTO EXHAUST DAMPER

Models 611 are a non-flanged horizontal mount exhaust backdraft damper. The frame is galvanized steel with aluminum blades. The blades have a felt seal on the leading edge for quiet closing and better protection from the weather. Spring assisted to allow blades to open quickly. Ideal for use in roof curbs, duct work, or wall collars when using a fan or power roof ventilator. Only available for horizontal mount exhaust applications.

Sizes available – 34" W x 34" H to 48" W x 48" H.

Maximum free area velocity – 2,250 fpm.

FEATURES

Frame

- Frame is Galvanized Steel.
- Conduit knockout provided for ease of electrical hook up.
- Easy to motorize. (order 411611 motor pack)
- 2" deep frame.

Blades

- Blades are 26 gauge Mill Finish Aluminum with galvanized reinforcement strip.
- Blades open freely to allow full opening and closing.
- Felt seal on leading edge of blades for quiet closing and better protection from the weather.
- Nylon bushings and stainless steel pivot pins
- Tie rod attached to all blades for simultaneous opening.

Ratings

- Maximum recommended velocity is 2250 FPM Pressure- 1.0 in w.g - differential pressure
- Temperature -40°F to 180°F



Options

- Motor packs.



MODEL 611

AUTO EXHAUST DAMPER

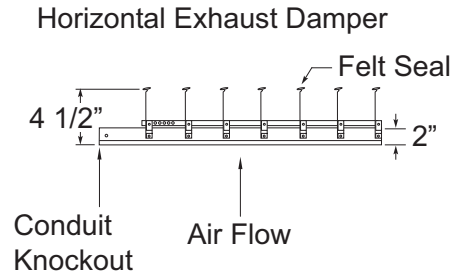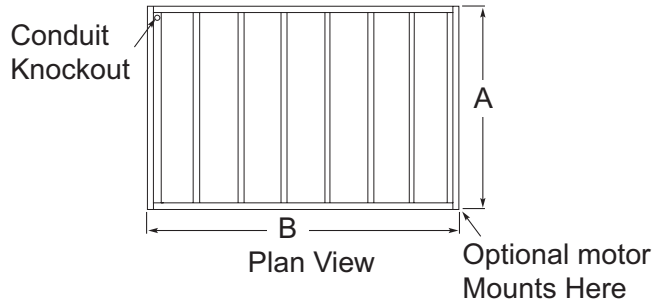

STANDARD SIZES

Dimensions in Inches

Part No.	Overall Frame Dimensions (W x H)	Free Area Dimensions (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	Number of Panels	Est. Shipping Weight (lbs)
611034 ●	33.75 x 33.75	31.125 x 32.25	7.91	6.97	1	15
611035 ●	34.75 x 34.75	31.125 x 33.25	8.39	7.19	1	16
611036 ●	35.75 x 35.75	33.125 x 34.25	8.88	7.88	1	17
611040 ●	39.75 x 39.75	37.125 x 38.25	10.97	9.86	1	19.5
611048 ●	47.75 x 47.75	45.125 x 46.25	15.83	14.49	1	26

Note: Dimensions are approximate due to normal tolerances in the manufacturing process. Estimated Free Area calculation is based upon the following formula: $MD[A+B+ (N \times C)]/144$. Free Area x FPM = CFM; actual performance may vary.

Optional 411611 Motor Pack Specifications

Motor Pack Part Number	Power Supply Required	Running AMPS	Stall Torque	Lead Length	Installed Unit Dimension		
					H	W	D
411611 ●	115/230V, 60 Hz	.11/.07	77 in. lbs.	6"	8.5	4.5	7.375

Ship Schedules:
● Next Day Shipment From Stock

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL 502

AUTOMATIC WALL SHUTTER-SINGLE PANEL

The Model 502 is a rear flanged low velocity gravity exhaust shutter. The frame is galvanized steel with mill finish aluminum blades. The blades have a felt seal on the leading edge for quiet closing and better protection from the weather. Ideal for use with direct drive or belt-driven exhaust fans. Recommended for vertical mount exhaust applications only.

Sizes available – 10" W x 10" H to 24" W x 24" H.

Maximum free area velocity – 2,000 fpm.



FEATURES

Frame

- 20 gauge galvanized steel.
- Tog-L-Loc and tabbed corners provide rigidity and durability.
- Integrated weather stripping incorporated into frame for additional strength and weather protection.
- Prepunch oblong mounting holes.

Blades


- 26 gauge 3105 mill finish aluminum.
- Felt seal on leading edge of blade for tight closure and quiet operation.
- Center-mounted galvanized steel tie-rod connects blades for uniform opening and closing.
- 304 stainless steel pivot pins and rivets
- Nylon bushings.

Ratings

- Maximum recommended velocity is 2,000 FPM
- Temperature - -40 F to 180 F

MODEL 502

AUTOMATIC WALL SHUTTER-SINGLE PANEL

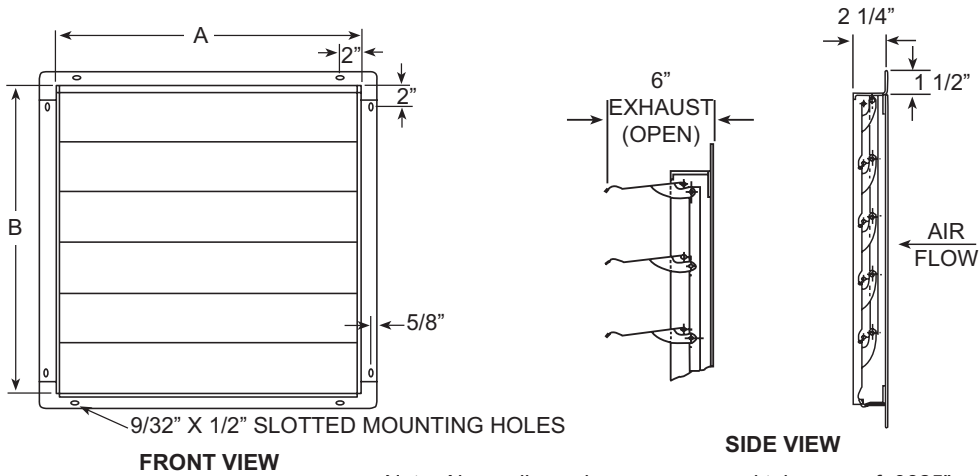

STANDARD SIZES

Dimensions in Inches

Part No.	Panel Size (A x B)	Est. Shipping Weight (lbs)
502010	10 x 10 ●	3.5
502012	12 x 12 ●	4
502016	16 x 16 ●	5.5
502020	20 x 20 ●	7
502024	24 x 24 ●	9.5

Ship Schedules:
● Next Day Shipment From Stock

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL 556

AUTOMATIC WALL SHUTTER-SINGLE OR DOUBLE PANEL

The Model 556 is a rear flanged general purpose exhaust shutter. The frame is galvanized steel with mill finish aluminum blades. The blades have a galvanized reinforcement strip across the top of each blade for added strength and counter balancing efficiency. The blades have a felt seal on the leading edge for quiet closing and better protection from the weather. Ideal for use with direct-drive or belt-driven exhaust fans. Recommended for vertical mount exhaust applications only.

Sizes available – 12" W x 12" H to 48" W x 48" H.

Maximum free area velocity – 2,500 fpm.

FEATURES

Frame

- .037 gauge galvanized steel.
- Tog-L-Loc and tabbed corners provide rigidity and durability.
- Integrated weather stripping incorporated into frame for additional strength and weather protection.
- Prepunch oblong mounting holes.
- Easy to motorize (optional motor pack model EAS).

Blades


- 26 gauge 3105 mill finish aluminum.
- Galvanized reinforcement strip across top of blade for added strength and counter balancing and efficiency.
- Felt seal on leading edge of blade for tight closure and quiet operation.
- Flanged ends of blades provide additional weather seal protection.
- Center-mounted galvanized steel tie-rod connects blades for uniform opening and closing.
- 304 stainless steel pivot pins, rivets and bushings.
- Opens freely to allow full 90 degree opening and closing.
- Counter balanced blades allow shutter to be mounted vertically to 45 degrees.

Ratings

- Maximum recommended velocity is 2,500 FPM of free area
- Temperature - -40 F to 180 F

Options

- Motor packs



EAS1232MTR





EAS3850MTR

MODEL 556

AUTOMATIC WALL SHUTTER-SINGLE OR DOUBLE PANEL

Single Panel


*Side view of shutter frame and installed motor pack

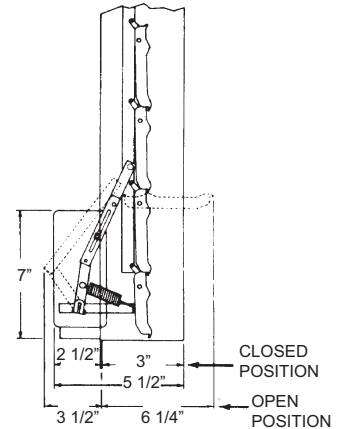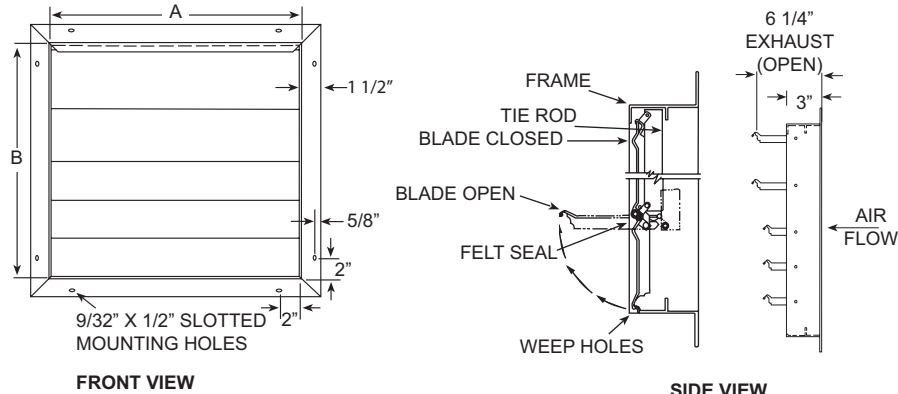


Note: Above dimensions + or - normal tolerance of .0625"

*Maximum operating dimensions

Double Panel

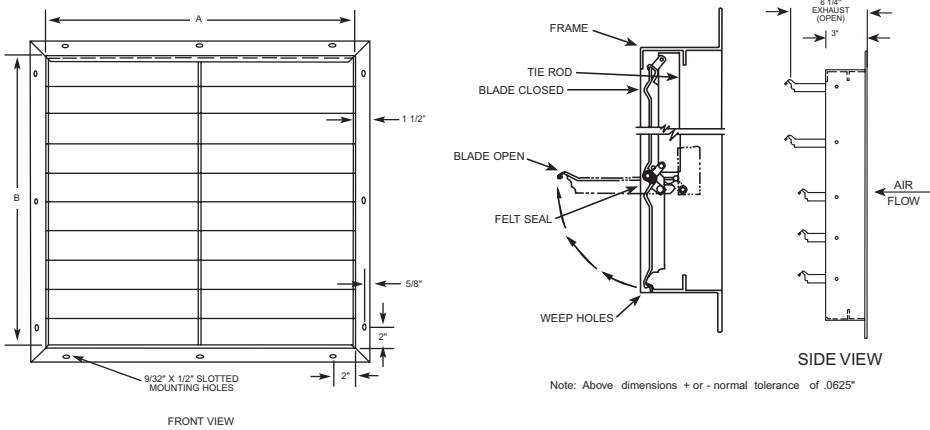

*Side view of shutter frame and installed motor pack

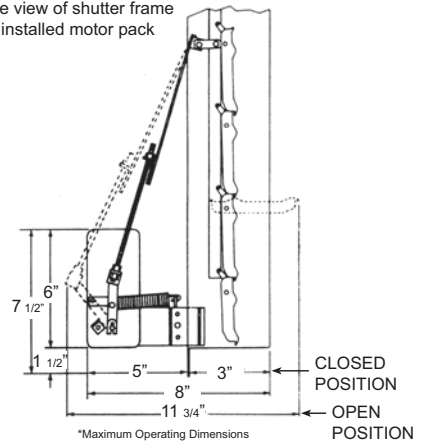

Note: Above dimensions + or - normal tolerance of .0625"

*Maximum Operating Dimensions

STANDARD SIZES

Dimensions in Inches

Part No.	Inside Frame Dimensions (W x H)	Overall Frame Dimensions (W x H)	Required Hole Opening (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	No. of Panels	Est. Shipping Weight (lbs)
556012	12 x 12	15 x 15	12.5 x 12.5	1.00	.79	1	4.5
556016	16 x 16	19 x 19	16.5 x 16.5	1.78	1.44	1	6.5
556020	20 x 20	23 x 23	20.5 x 20.5	2.78	2.28	1	8.5
556024	24 x 24	27 x 27	24.5 x 24.5	4.00	3.32	1	11
556030	30 x 30	33 x 33	30.5 x 30.5	6.25	5.16	1	15
556036	36 x 36	39 x 39	36.5 x 36.5	9.00	7.44	1	19
556042	42 x 42	45 x 45	42.5 x 42.5	12.25	10.25	2	29
556048	48 x 48	51 x 51	48.5 x 48.5	16.00	12.92	2	35.5

Note: Dimension are approximate due to normal tolerances in the manufacturing process. Estimated Free Area calculation is based upon the following formula: $MD[A+B+(N \times C)]/144$. Free Area x FPM = CFM; actual performance may vary.

Optional EAS Motor Pack Specifications

Motor Pack Part No.	Power Supply Required	Running AMPS	Stall Torque	Damper Panels	Lead Length
EAS1232MTR	● 115/230V, 60 Hz	.11/.07	77 ins. lbs.	Single	6"
EAS3850MTR	● 115/230V, 60 Hz	.11/.07	77 ins. lbs.	Double	6"

Ship Schedules:

◆ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

DAMPERS & SHUTTERS

MODEL EAS-RF

AUTOMATIC WALL SHUTTER-SINGLE OR DOUBLE PANEL

The Model EAS is a rear flanged exhaust shutter for areas where corrosion may be a problem. The frame and blades are mill finish aluminum. The blades have a galvanized reinforcement strip across the top of each blade for added strength and counter balancing efficiency. The blades have a felt seal on the leading edge for quiet closing and better protection from the weather. Ideal for use with direct-drive or belt-driven exhaust fans. Recommended for vertical mount exhaust applications only.

Sizes available – 12" W x 12" H to 48" W x 48" H.

Maximum free area velocity – 2,500 fpm.



FEATURES

Frame

- .062 mill finish 6063T5 or T6 extruded aluminum.
- Welded and/or staked corners provide rigidity and durability.
- Integrated weather stripping incorporated into frame for additional strength and weather protection.
- Prepunched oblong mounting holes.
- Easy to motorize (optional motor pack model EAS).

Blades


- 26 gauge 3105 mill finish aluminum.
- Galvanized reinforcement strip across top of blade for added strength and counter balancing and efficiency.
- Felt seal on leading edge of blade for tight closure and quiet operation.
- Flanged ends of blades provide additional weather seal protection.
- Center-mounted galvanized steel tie-rod connects blades for uniform opening and closing.
- 304 stainless steel pivot pins, rivets and bushings.
- Opens freely to allow full 90 degree opening and closing.
- Counter balanced blades allow shutter to be mounted vertically to 45 degrees.

Ratings

- Maximum recommended velocity is 2,500 FPM Temperature - -40 F to 180 F

Options

- Motor packs



EAS1232MTR




EAS3850MTR


MODEL EAS-RF

AUTOMATIC WALL SHUTTER-SINGLE OR DOUBLE PANEL

Single Panel

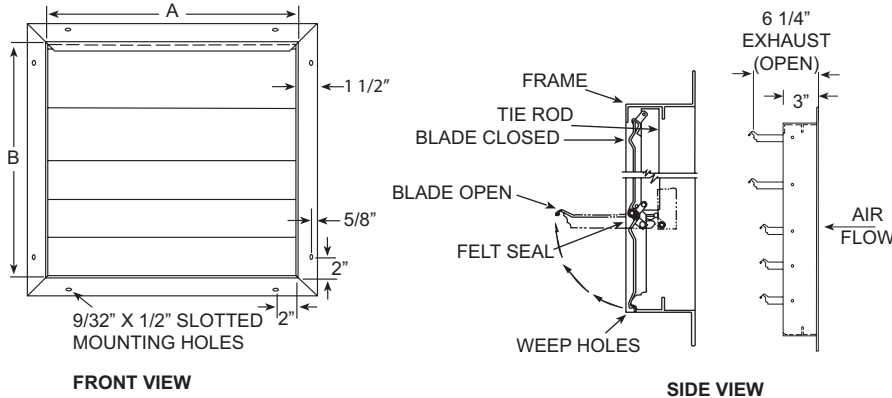


*Side view of shutter frame and installed motor pack

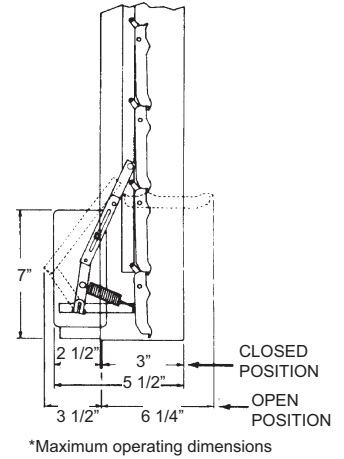


Note: Above dimensions + or - normal tolerance of .0625"

Double Panel

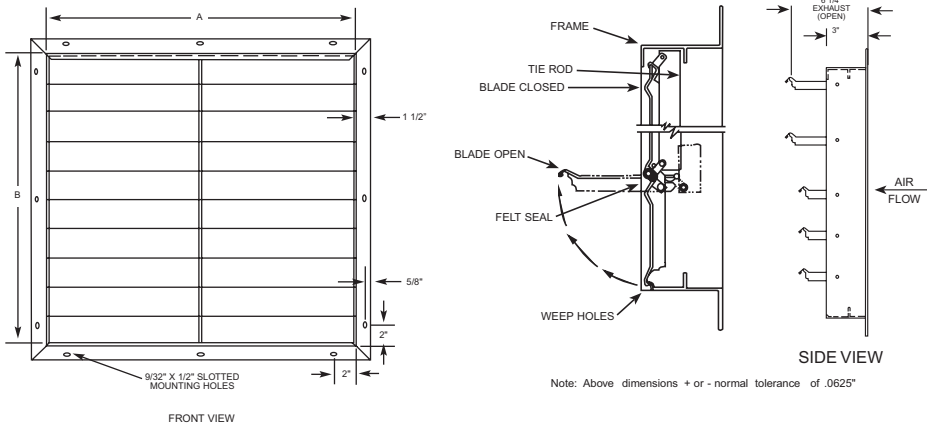

*Side view of shutter frame and installed motor pack

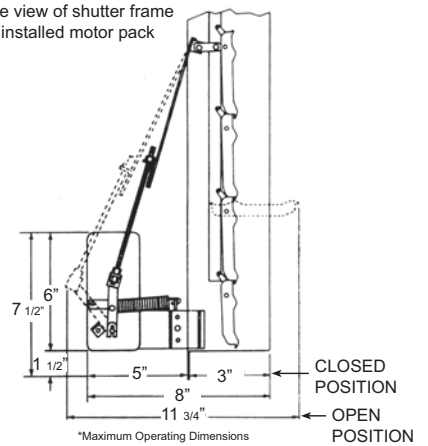

Note: Above dimensions + or - normal tolerance of .0625"

STANDARD SIZES

Dimensions in Inches

Part No.	Inside Frame Dimensions (W x H)	Overall Frame Dimensions (W x H)	Required Hole Opening (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	No. of Panels	Est. Shipping Weight (lbs)
EAS12-RF ●	12 x 12	15 x 15	12.5 x 12.5	1.00	.79	1	4.5
EAS16-RF ●	16 x 16	19 x 19	16.5 x 16.5	1.78	1.44	1	6.5
EAS20-RF ●	20 x 20	23 x 23	20.5 x 20.5	2.78	2.28	1	8.5
EAS24-RF ●	24 x 24	27 x 27	24.5 x 24.5	4.00	3.32	1	11
EAS30-RF ●	30 x 30	33 x 33	30.5 x 30.5	6.25	5.16	1	15
EAS36-RF ●	36 x 36	39 x 39	36.5 x 36.5	9.00	7.44	1	19
EAS42-RF ●	42 x 42	45 x 45	42.5 x 42.5	12.25	10.25	2	23
EAS48-RF ●	48 x 48	51 x 51	48.5 x 48.5	16.00	12.92	2	27.5

Note: Dimension are approximate due to normal tolerances in the manufacturing process. Estimated Free Area calculation is based upon the following formula: $MD[A+B+ (N \times C)]/144$. Free Area x FPM = CFM; actual performance may vary.

Optional EAS Motor Pack Specifications

Motor Pack Part No.	Power Supply Required	Running AMPS	Stall Torque	Damper Panels	Lead Length
EAS1232MTR ●	115/230V, 60 Hz	.11/.07	77 ins. lbs.	Single	6"
EAS3850MTR ●	115/230V, 60 Hz	.11/.07	77 ins. lbs.	Double	6"

Ship Schedules:
● Next Day Shipment From Stock

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

DAMPERS & SHUTTERS

MODEL EAS-HDGS

AUTOMATIC WALL SHUTTER-SINGLE OR DOUBLE PANEL

The Model EAS-HDGS is a rear flanged exhaust shutter for applications that require higher velocities. The frame and blades are mill finish extruded aluminum with stainless steel tie rods. Ideal for use with direct drive or belt-driven exhaust fans. Recommended for vertical mount exhaust applications only.

Sizes available – 12" W x 12" H to 48" W x 48" H.

Maximum free area velocity – 3,250 fpm.

FEATURES

Frame

- .062 mill finish 6063T5/6 extruded aluminum.
- Staked corners provide rigidity and durability.
- Integrated weather stripping incorporated into frame for additional strength and weather protection.
- Prepunched oblong mounting holes.

Blades

- .080 mill finish 6063T5/6 extruded aluminum.
- Stainless steel tie-rod connects blades for uniform opening and closing.
- 304 stainless steel pivot screws, rivets and bushings.
- Opens freely to allow full 90 degree opening and closing.

Ratings


- Maximum recommended velocity is 3,250 FPM
- Temperature - -40 F to 180 F




MODEL EAS-HDGS

AUTOMATIC WALL SHUTTER-SINGLE OR DOUBLE PANEL

Single Panel

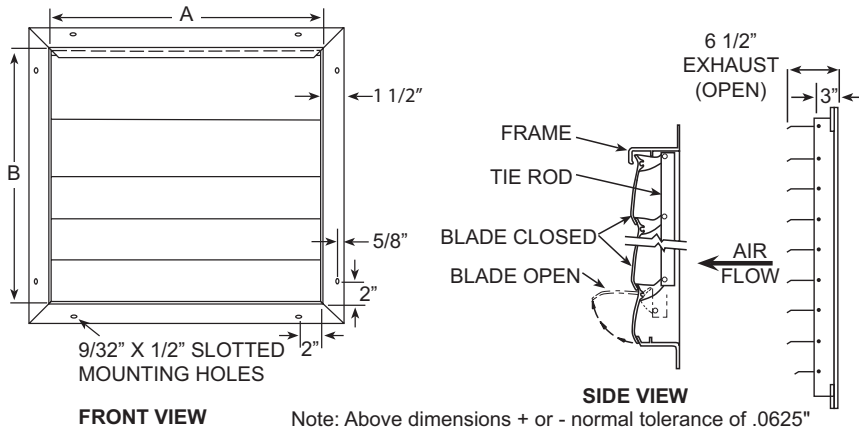

Double Panel

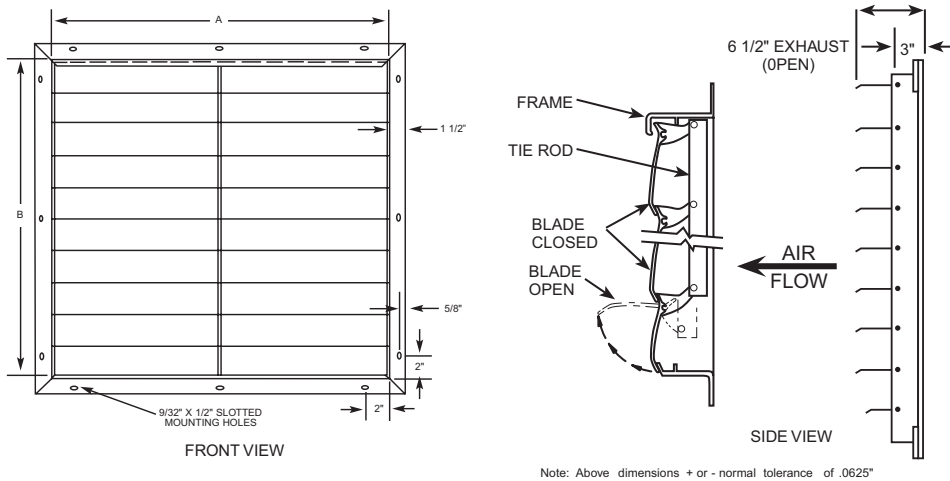

STANDARD SIZES

Dimensions in Inches

Part No.	Inside Frame Dimensions (W x H)	Overall Frame Dimensions (W x H)	Required Hole Opening (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	No. of Panels	Est. Shipping Weight (lbs)
EAS-HDGS12	12 x 12	15 x 15	12.5 x 12.5	1.00	.79	1	6
EAS-HDGS16	16 x 16	19 x 19	16.5 x 16.5	1.78	1.44	1	8
EAS-HDGS20	20 x 20	23 x 23	20.5 x 20.5	2.78	2.28	1	12
EAS-HDGS24	24 x 24	27 x 27	24.5 x 24.5	4.00	3.32	1	15
EAS-HDGS30	30 x 30	33 x 33	30.5 x 30.5	6.25	5.16	1	20
EAS-HDGS36	36 x 36	39 x 39	36.5 x 36.5	9.00	7.07	1	26
EAS-HDGS42	42 x 42	45 x 45	42.5 x 42.5	12.25	10.25	2	31
EAS-HDGS48	48 x 48	51 x 51	48.5 x 48.5	16.00	12.92	2	40

Note: Dimension are approximate due to normal tolerances in the manufacturing process.
 Estimated Free Area calculation is based upon the following formula: $MD[A+B+(N \times C)]/144$.
 Free Area x FPM = CFM; actual performance may vary.

Ship Schedules:
◆ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.


MODEL FGS

AUTOMATIC WALL SHUTTER-SINGLE OR DOUBLE PANEL

The Model FGS is a rear flanged exhaust shutter for areas where corrosion is a known problem. The frame and blades are a heavy duty fiberglass pultrusion with stainless steel tie rods. Ideal for use with direct-drive or belt-driven exhaust fans in chemical plants and poultry/swine confinement operations. Recommended for vertical mount exhaust applications only.

Sizes available – 12" W x 12" H to 48" W x 48" H.

Maximum free area velocity – 2,500 fpm.



FEATURES

Frame

- Fiberglass pultrusion.
- Integrated weather stripping incorporated into frame for additional strength and weather protection.
- Prepunched oblong mounting holes.

Ratings

- Maximum recommended velocity is 2,500 FPM Temperature - -40 F to 180 F


Blades

- Fiberglass pultrusion.
- Center-mounted stainless steel tie-rod connects blades for uniform opening and closing.
- 304 stainless steel screws, pins, rivets and bushings.
- Opens freely to allow full 90 degree opening and closing.


MODEL FGS

AUTOMATIC WALL SHUTTER-SINGLE OR DOUBLE PANEL

Single Panel

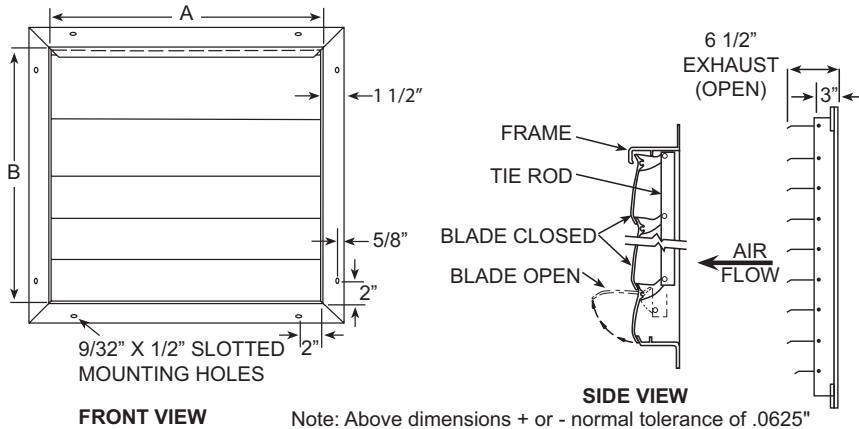

Double Panel

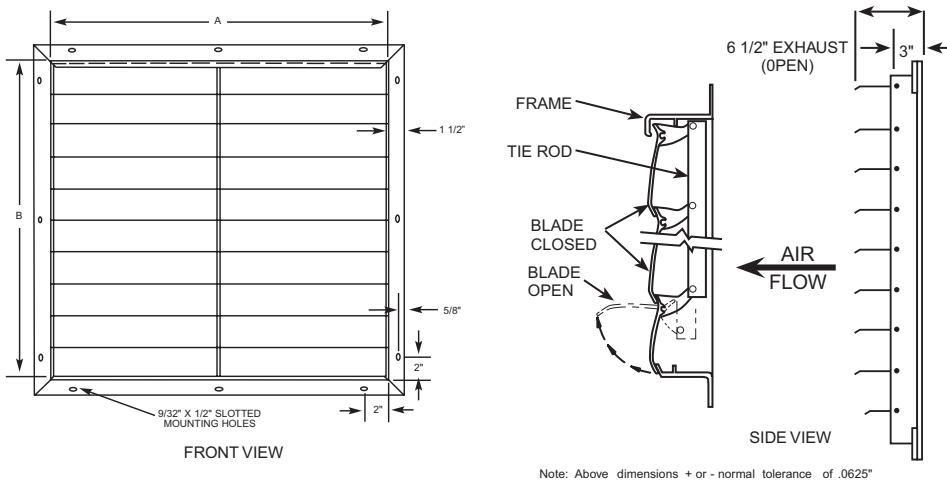

STANDARD SIZES Dimensions in Inches

Part No.	Inside Frame Dimensions (W x H)	Overall Frame Dimensions (W x H)	Required Hole Opening (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	No. of Panels	Est. Shipping Weight (lbs)
FGS12 ♦	12 x 12	15 x 15	12.5 x 12.5	1.00	.79	1	5.5
FGS16 ♦	16 x 16	19 x 19	16.5 x 16.5	1.78	1.44	1	6
FGS20 ♦	20 x 20	23 x 23	20.5 x 20.5	2.78	2.28	1	8.5
FGS24 ♦	24 x 24	27 x 27	24.5 x 24.5	4.00	3.32	1	11
FGS30 ♦	30 x 30	33 x 33	30.5 x 30.5	6.25	5.16	1	15
FGS36 ♦	36 x 36	39 x 39	36.5 x 36.5	9.00	7.44	1	20
FGS42 ♦	42 x 42	45 x 45	42.5 x 42.5	12.25	10.25	2	28
FGS48 ♦	48 x 48	51 x 51	48.5 x 48.5	16.00	12.92	2	35

Note: Dimension are approximate due to normal tolerances in the manufacturing process. Estimated Free Area calculation is based upon the following formula: $MD[A+B+(N \times C)]/144$. Free Area x FPM = CFM; actual performance may vary.

Ship Schedules:

♦ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL 304SS

AUTOMATIC WALL SHUTTER

The Model 304SS is a rear flanged exhaust shutter for areas that require extreme corrosion resistance. The frame and blades are 304 stainless steel with stainless steel tie rods and hardware. Ideal for use with direct-drive or belt-driven exhaust fans in chemical plants and food processing operations. Recommended for vertical mount exhaust applications only.

Sizes available – 12" W x 12" H to 36" W x 36" H.

Maximum free area velocity – 2,500 fpm.

FEATURES

Frame

- .039 min. gauge 304 stainless steel.
- Welded frame provide rigidity and durability.
- Integrated weather stripping incorporated into frame for additional strength and weather protection.
- Prepunch oblong mounting holes.

Blades

- .016 gauge 304 stainless steel.
- Stainless steel reinforcement rod fasten blades to frame for added strength.
- Center-mounted stainless steel tie-rod connects blades for uniform opening and closing on face of the unit.
- 304 stainless steel rods, rivets and bushings.
- Opens freely to allow full 90 degree opening and closing


Ratings

- Maximum recommended velocity is 2,500 FPM
- Temperature - -40 F to 180 F



MODEL 304SS

AUTOMATIC WALL SHUTTER

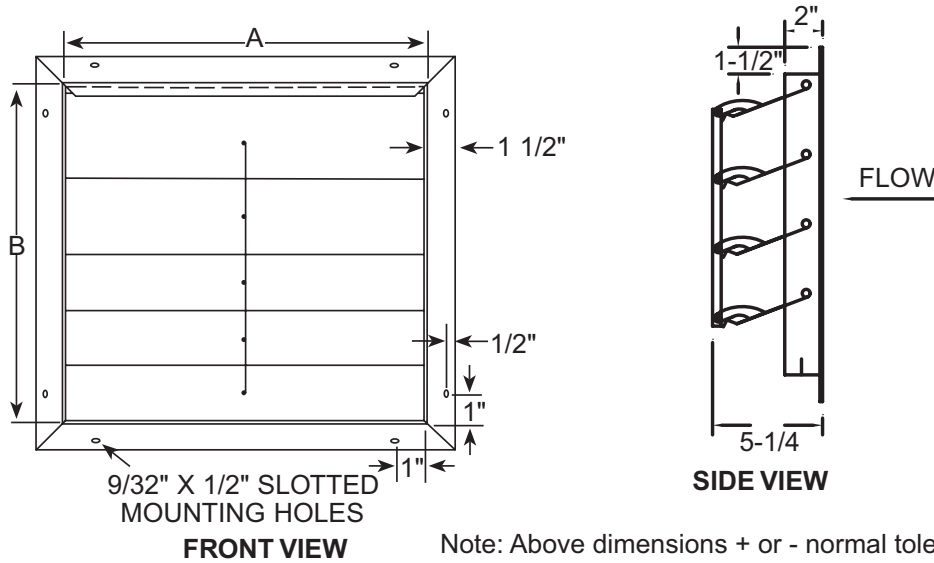

STANDARD SIZES

Dimensions in Inches

Part No.	Inside Frame Dimensions (W x H)	Overall Frame Dimensions (W x H)	Required Hole Opening (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	No. of Panels	Est. Shipping Weight (lbs)
304SS12 ♦	12 x 12	15 x 15	12.5 x 12.5	1.00	.82	1	4.5
304SS16 ♦	16 x 16	19 x 19	16.5 x 16.5	1.78	1.51	1	6
304SS20 ♦	20 x 20	23 x 23	20.5 x 20.5	2.78	2.41	1	8.5
304SS24 ♦	24 x 24	27 x 27	24.5 x 24.5	4.00	3.25	2	11.5
304SS30 ♦	30 x 30	33 x 33	30.5 x 30.5	6.25	5.44	2	16
304SS36 ♦	36 x 36	39 x 39	36.5 x 36.5	9.00	7.69	2	21

Note: Dimension are approximate due to normal tolerances in the manufacturing process.
 Estimated Free Area calculation is based upon the following formula: $MD[A+B+ (N \times C)]/144$.
 Free Area x FPM = CFM; actual performance may vary.

Ship Schedules:
♦ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL EASB & EASW AUTOMATIC WALL SHUTTER

The Models EASB & EASW are rear flanged exhaust shutters for areas where corrosion is a known problem. The frame is painted extruded aluminum with UV stabilized PVC blades with yellow zinc dichromate rods running the full length of the blades. Ideal for direct-drive or belt-driven cone or slant-wall exhaust fans in poultry or swine confinement operations. Recommended for vertical mount exhaust applications only. Available in white or black.

Sizes available – 36", 39", 51", 54" square.

Maximum free area velocity – 1,500 fpm.



FEATURES

Frame

- .080 extruded aluminum painted black or white
- Staked corners provide rigidity and durability.
- Integrated weather stripping incorporated into frame for additional strength and weather protection.
- Prepunched oblong mounting holes.

Ratings


- Maximum recommended velocity is 1,500 FPM
- Temperature - -40 F to 180 F

Blades

- 3" wide black or white PVC blades
- Yellow zinc dichromate rods connect blades for uniform opening and closing
- Opens freely to allow full 90 degree opening and closing

MODEL EASB & EASW

AUTOMATIC WALL SHUTTER

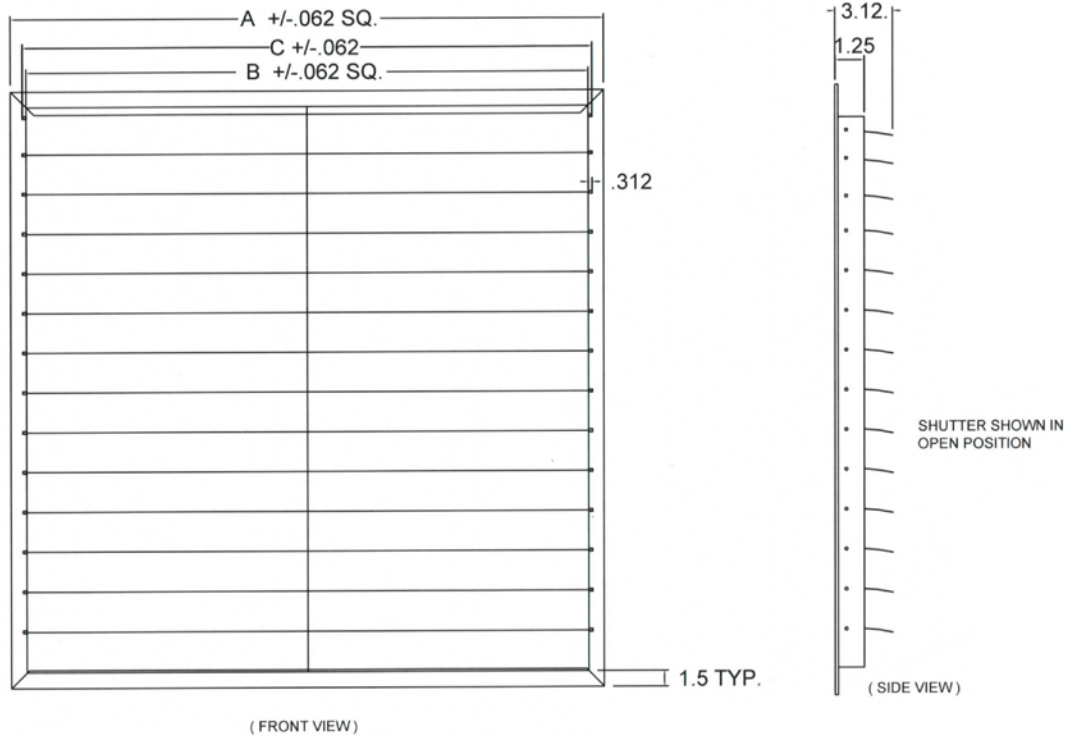

STANDARD SIZES

Dimensions in Inches

Part No.	Overall (A) Frame Dimensions (W x H)	Inside (B) Frame Dimensions (W x H)	Required (C) Hole Opening (W x H)	# of Panels	Est. Shipping Weight (lbs)
EASB36 ♦	39 x 39	35.87 x 35.87	36.5 x 36.5	2	12
EASB39 ♦	42 x 42	38.87 x 38.87	39.5 x 39.5	2	13.5
EASB51 ♦	54 x 54	50.87 x 50.87	51.5 x 51.5	3	19.5
EASB54 ♦	57 x 57	53.87 x 53.87	54.5 x 54.5	3	28
EASW36 ♦	39 x 39	35.87 x 35.87	36.5 x 36.5	2	12
EASW39 ♦	42 x 42	38.87 x 38.87	39.5 x 39.5	2	13.5
EASW51 ♦	54 x 54	50.87 x 50.87	51.5 x 51.5	3	19.5
EASW54 ♦	57 x 57	53.87 x 53.87	54.5 x 54.5	3	28

Note: Dimension are approximate due to normal tolerances in the manufacturing process.

DAMPERS & SHUTTERS

Ship Schedules:
♦ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL AMD

EXTRUDED ALUMINUM MOTORIZED DAMPER

Models AMD are heavy duty motorized volume control dampers. The 1-1/2" flanged frame has welded corners for added strength. The 6" wide blades are center-pivoted for a full 90° rotation with parallel blade action. The stainless steel jamb seals help in keeping out light, air, and moisture. The dampers can be used for exhaust or supply applications and can be mounted in either a vertical or horizontal position; typically walls or curbs. Available in Extruded Aluminum (AMD) comes standard with an internally mounted factory installed 120/240 volt power open / spring close motor with an end switch.

Sizes available – 12" W x 12" H to 48" W x 48" H.

Maximum free area velocity – 3,500 fpm.



FEATURES

Frame

- 2" deep x 1 1/2" flanged x .125 thick extruded aluminum.

Blades

- 6" wide x .080 thick extruded aluminum. Parallel Blade Action.

Construction

- "TIG" welded frames.

Seals

- Stainless Steel Jamb Seals.

Tie Rod

- .125 thick extruded aluminum tie rods and blade clips. On-blade type.

Bushings

- Nylon

Mounting Holes

- 9/32" x 1/2" slotted.

Finish


- Mill

Performance Criteria:

- 3,500 fpm Maximum Velocity.
- 4" wg Maximum Pressure.
- 122 Degree Maximum Temperature.

MODEL AMD

EXTRUDED ALUMINUM MOTORIZED DAMPER

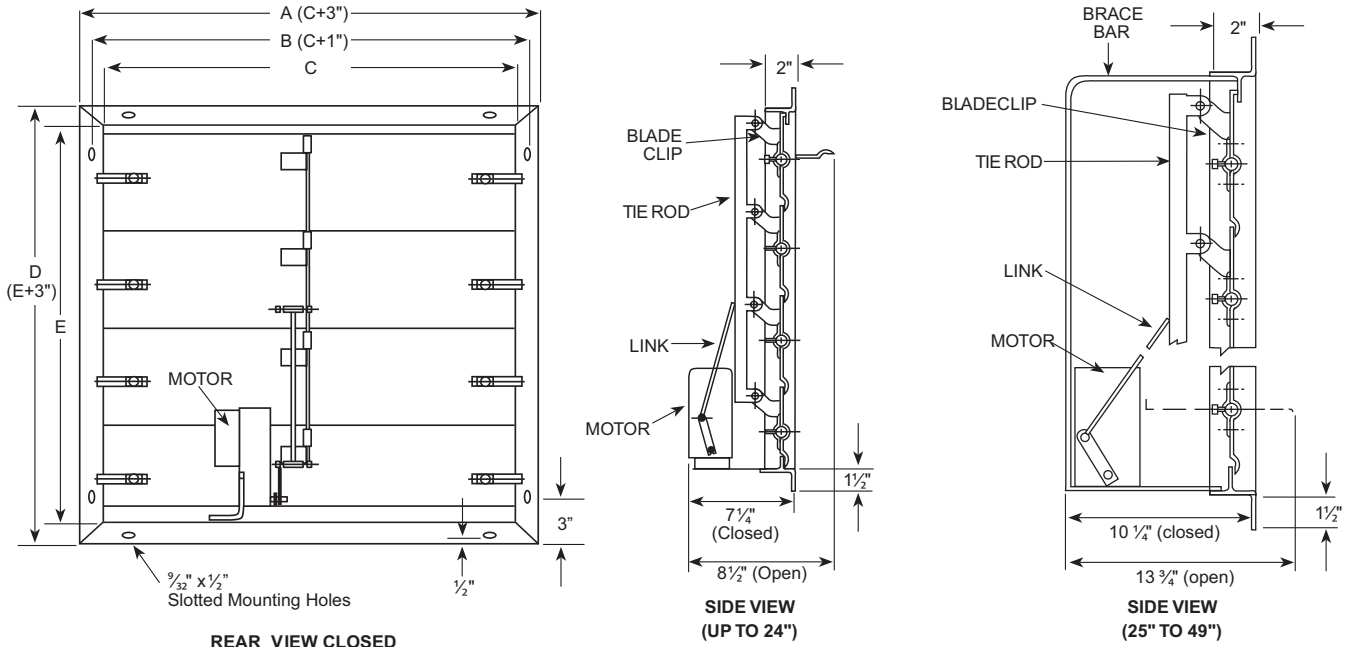

Note: Above dimensions+ or -normal tolerance of .0625".

STANDARD SIZES

Dimensions in Inches

Part No.	Overall (A & D) Frame Dimensions (W x H)	Inside (C & E) Frame Dimensions (W x H)	Required (B) Hole Opening (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	Est. Shipping Weight (lbs)
AMD12	15 x 15	12 x 12	13 x 13	1.00	.84	10
AMD16	19 x 19	16 x 16	17 x 17	1.78	1.67	12
AMD20	23 x 23	20 x 20	21 x 21	2.78	2.05	15
AMD24	27 x 27	24 x 24	25 x 25	4.00	3.59	17
AMD30	33 x 33	30 x 30	31 x 31	6.25	5.68	36
AMD36	39 x 39	36 x 36	37 x 37	9.00	8.25	47
AMD42	45 x 45	42 x 42	43 x 43	12.25	11.31	55
AMD48	51 x 51	48 x 48	49 x 49	16.00	14.84	67

Note: Dimensions are approximate due to normal tolerances in the manufacturing process. Estimated Free Area calculation is based upon the following formula: $MD[A+B+(N \times C)]/144$. Free Area x FPM = CFM; actual performance may vary.

MOTOR SPECS

Motor Manufacturer	Model Number	Power Supply Required	Motor Type	Temperature Range F°
Belimo	TF120-S	120/240 V 50/60 Hz	2 position Spring Return	-22 to 122

Ship Schedules:
● Next Day Shipment From Stock
◆ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL GMD

GALVANIZED MOTORIZED DAMPER

Models GMD are heavy duty motorized volume control dampers. The 1-1/2" flanged frame has welded corners for added strength. The 6" wide blades are center-pivoted for a full 90° rotation with parallel blade action. The stainless steel jamb seals help in keeping out light, air, and moisture. The dampers can be used for exhaust or supply applications and can be mounted in either a vertical or horizontal position; typically walls or curbs. Available Galvanized Steel (GMD) and comes standard with an internally mounted factory installed 120/240 volt power open / spring close motor with an end switch.

Sizes available – 12" W x 12" H to 48" W x 48" H.

Maximum free area velocity – 3,500 fpm.



FEATURES

Frame

- 2" deep x 11/2" flanged x 14 gauge Galvanized Steel.

Blades

- 6" wide x 16 gauge Galvanized Steel. Parallel Blade Action.

Construction

- "MIG" welded frames.

Seals

- Stainless Steel Jamb Seals.

Tie Rod

- 11 gauge Galvanized Steel tie rods and blade clips. On-blade type.

Bushings

- Brass

Mounting Holes

- 9/32" x 1/2" slotted.

Finish


- Galvanized

Performance Criteria:

- 3,500 fpm Maximum Velocity.
- 4" wg Maximum Pressure.
- 122 Degree Maximum Temperature.

MODEL GMD

GALVANIZED MOTORIZED DAMPER

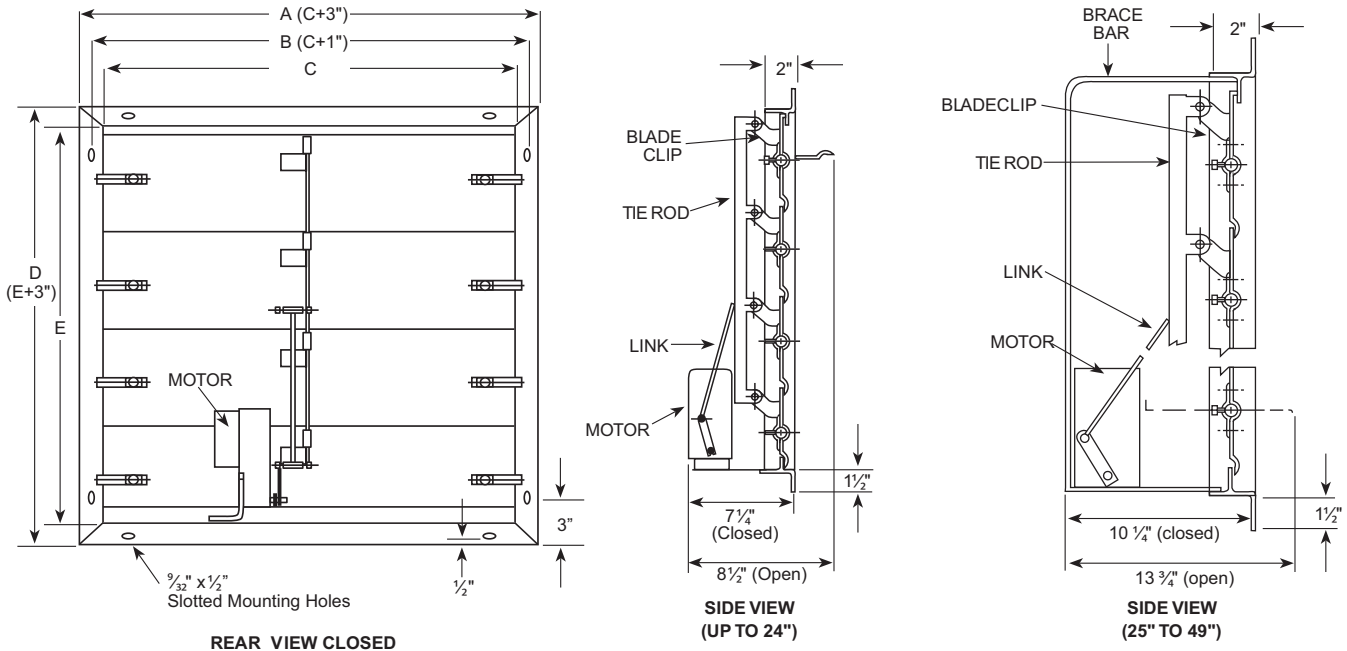

STANDARD SIZES

Dimensions in Inches

Part No.		Overall (A & D) Frame Dimensions (W x H)	Inside (C & E) Frame Dimensions (W x H)	Required (B) Hole Opening (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	Est. Shipping Weight (lbs)
GMD12	●	15 x 15	12 x 12	13 x 13	1.00	.84	14
GMD16	●	19 x 19	16 x 16	17 x 17	1.78	1.67	21
GMD20	●	23 x 23	20 x 20	21 x 21	2.78	2.05	25
GMD24	●	27 x 27	24 x 24	25 x 25	4.00	3.59	32
GMD30	●	33 x 33	30 x 30	31 x 31	6.25	5.68	53
GMD36	●	39 x 39	36 x 36	37 x 37	9.00	8.25	67
GMD42	●	45 x 45	42 x 42	43 x 43	12.25	11.31	83
GMD48	●	51 x 51	48 x 48	49 x 49	16.00	14.84	98

Note: Dimensions are approximate due to normal tolerances in the manufacturing process. Estimated Free Area calculation is based upon the following formula: $MD[A+B+(N \times C)]/144$. Free Area x FPM = CFM; actual performance may vary.

MOTOR SPECS

Motor Manufacturer	Model Number	Power Supply Required	Motor Type	Temperature Range F°
Belimo ●	TF120-S	120/240 V 50/60 Hz	2 position Spring Return	-22 to 122

Ship Schedules:
● Next Day Shipment From Stock

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

DAMPERS & SHUTTERS

MODEL ACD

ALUMINUM MOTORIZED HAT CHANNEL DAMPER

The Model ACD is an Extruded Aluminum motorized volume control damper. The hat channel frame is 5" wide with 7" wide center-pivoted blades for a full 90° rotation with parallel blade action. The TPV blade and stainless steel jamb seals help in keeping out light, air, and moisture. The dampers can be used for exhaust or supply applications and can be mounted in a vertical or horizontal position; typically walls, curbs, or ductwork. Available in Extruded Aluminum (ACD) and comes standard with an internally mounted factory installed 100-240 volt power open / spring close motor with an end switch.

Sizes available – 12" W x 12" H to 48" W x 48" H.

Maximum free area velocity – 3,500 fpm.

FEATURES

Frame

- 5" x 1" x .100 thick Extruded Aluminum Hat Channel.

Blades

- 7" wide x .080 thick extruded aluminum. Parallel Blade Action.

Seals

- Blade – Extruded TPV (-70°F to +280° F).
- Jamb – Stainless Steel..

Tie Rod

- On-blade type.

Bushings

- Nylon

Finish

- Mill


Performance Criteria:

- 3,500 fpm Maximum Velocity.
- 4" wg Maximum Pressure.
- 122 Degree Maximum Temperature.




MODEL ACD

ALUMINUM MOTORIZED HAT CHANNEL DAMPER

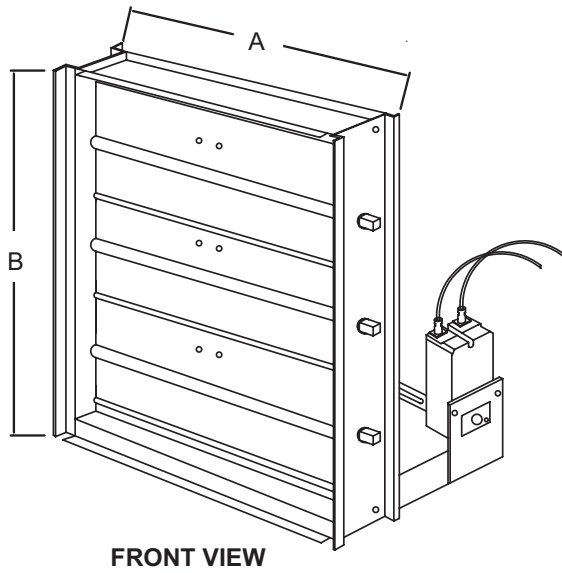

FRONT VIEW

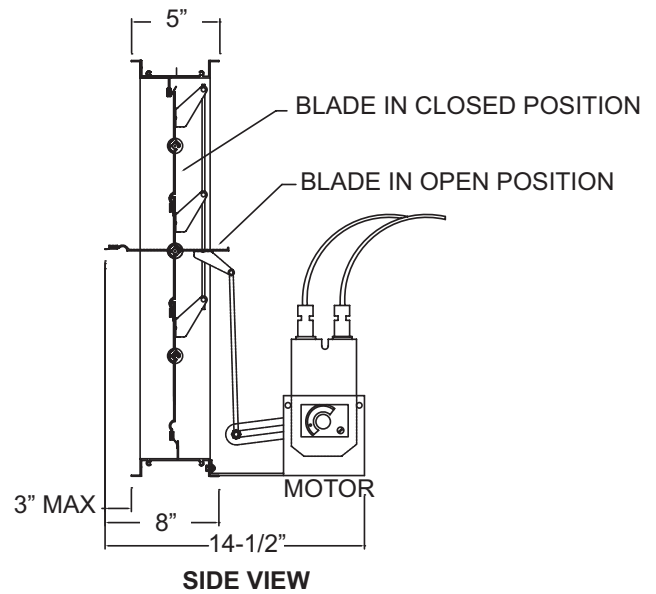

SIDE VIEW

STANDARD SIZES

Dimensions in Inches

Part No.	Overall Frame Dimensions (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	Est. Shipping Weight (lbs)
ACD12 ♦	11.75 x 11.75	.96	.37	5
ACD16 ♦	15.75 x 15.75	1.73	1.05	7
ACD20 ♦	19.75 x 19.75	2.71	2.13	10.5
ACD24 ♦	23.75 x 23.75	3.92	3.17	13
ACD30 ♦	29.75 x 29.75	6.15	5.11	18.5
ACD36 ♦	35.75 x 35.75	8.88	7.56	25
ACD42 ♦	41.75 x 41.75	12.11	10.49	34
ACD48 ♦	47.75 x 47.75	15.84	13.90	42

Note: Dimensions are approximate due to normal tolerances in the manufacturing process. Estimated Free Area calculation is based upon the following formula: $MD[A+B+(N \times C)]/144$. Free Area x FPM = CFM; actual performance may vary.

MOTOR SPECS

Motor Manufacturer	Model Number	Power Supply Required	Motor Type	Temperature Range F°
Belimo ●	TF120-S	120/240 V 50/60 Hz	2 position Spring Return	-22 to 122

Ship Schedules:
● Next Day Shipment From Stock
♦ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

DAMPERS & SHUTTERS

MODEL AFL

ALUMINUM FIXED LOUVER

Models AFL fixed louvers provide good protection from rain and weather at an economical price. The channel frame is 4" deep with K-style nondrainable 45 degree blades. Available in Aluminum (AFL) and comes standard with a birdscreen on the back.

Single panel sizes available: 18" W x 18" H to 48" W x 48" H.

FEATURES

Frame

- 4" deep channel x .060 thick aluminum

Blades

- K style, .060 thick Aluminum, positioned at a 45 degree angle and spaced approximately 4" centers.

Construction

- Tabbed

Birdscreen

- 1/2" Flattened Aluminum in a removable frame mounted on the interior


Finish

- Mill



MODEL AFL

ALUMINUM FIXED LOUVER

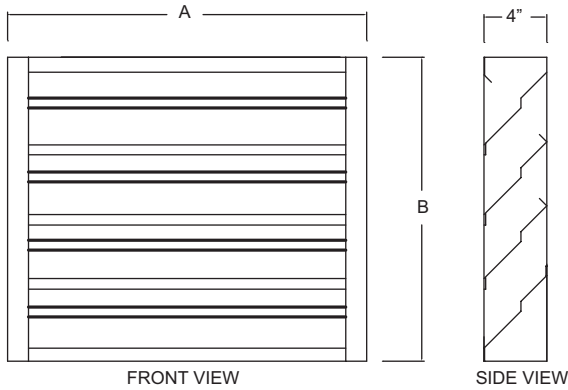

Part No.	Overall Frame Dimensions (W x H) in. inches	Free Area (Sq. ft.)	Est. Shipping Weight (lbs)
AFL18 ●	17.5 x 17.5	.87	8
AFL24 ●	23.5 x 23.5	1.77	14
AFL30 ●	29.5 x 29.5	2.77	20
AFL36 ●	35.5 x 35.5	3.98	26
AFL48 ●	47.5 x 47.5	7.07	40


NOTE: Above "A" and "B" dimensions are undersized by 1/2" + or - normal tolerance of .0625

Note: Estimated free area calculations are based upon AMCA standard 500-L, actual performance may vary.

Pressure Drop


Standard Air - .075lbs per cubic foot
Test size - 48"x 48" (Intake)

Ratings do not include the effect of a birdscreen

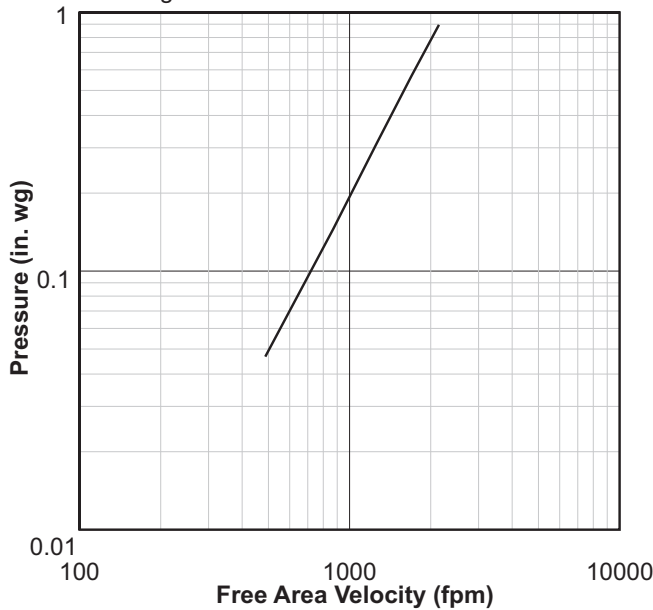

WATER PENETRATION

Standard Air - .075lbs per cubic foot
Test size - 48"x 48" for a 15 minute duration

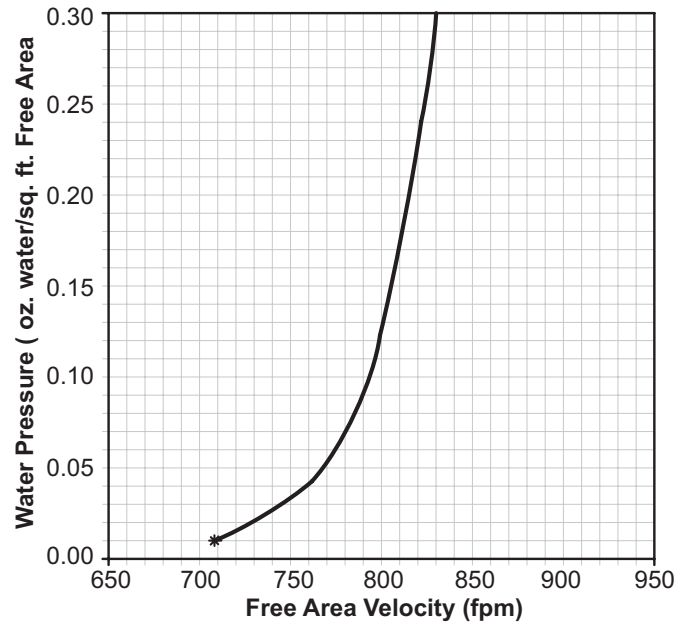

The beginning point of water penetration at .01 oz./sq. ft. is 709 fpm free area velocity.

JencoFan certifies that the Model AFL was tested according to AMCA Standard 500. These tests were performed under certain sets of laboratory conditions. These performance ratings do not guarantee that other environmental conditions may actually occur. Use safety factors when selecting louver sizes based upon performance.

Ship Schedules:
● Next Day Shipment From Stock

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL GFL

GALVANEAL STEEL FIXED LOUVER

Models GFL fixed louvers provide good protection from rain and weather at an economical price. The channel frame is 4" deep with K-style nondrainable 45 degree blades. Available in Galvaneal (GFL) and comes standard with a birdscreen on the back.

Single panel sizes available: 18" W x 18" H to 48" W x 48" H.

FEATURES

Frame

- 4" deep channel x 16 gauge A-60 galvaneal steel

Blades

- K style, 16 gauge A-60 galvaneal steel, positioned at a 45 degree angle and spaced approximately 4" centers

Construction

- Tabbed


Finish

- Mill



MODEL GFL

GALVANEAL STEEL FIXED LOUVER

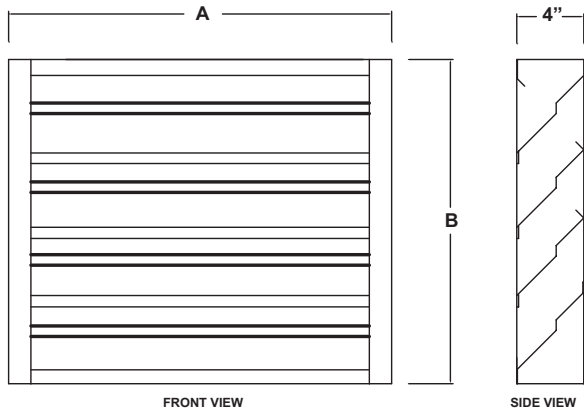

NOTE: Above "A" and "B" dimensions are undersized by 1/2" + or - normal tolerance of .0625


Part No.	Overall Frame Dimensions (W x H) in. inches	Free Area (Sq. ft.)	Est. Shipping Weight (lbs)
GFL18 ●	17.5 x 17.5	.87	18
GFL24 ●	23.5 x 23.5	1.77	30
GFL30 ●	29.5 x 29.5	2.77	45
GFL36 ●	35.5 x 35.5	3.98	60
GFL48 ●	47.5 x 47.5	7.07	100

Note: Estimated free area calculations are based upon AMCA standard 500-L, actual performance may vary.

Pressure Drop


Standard Air - .075lbs per cubic foot
Test size - 48"x 48" (Intake)

Ratings do not include the effect of a birdscreen

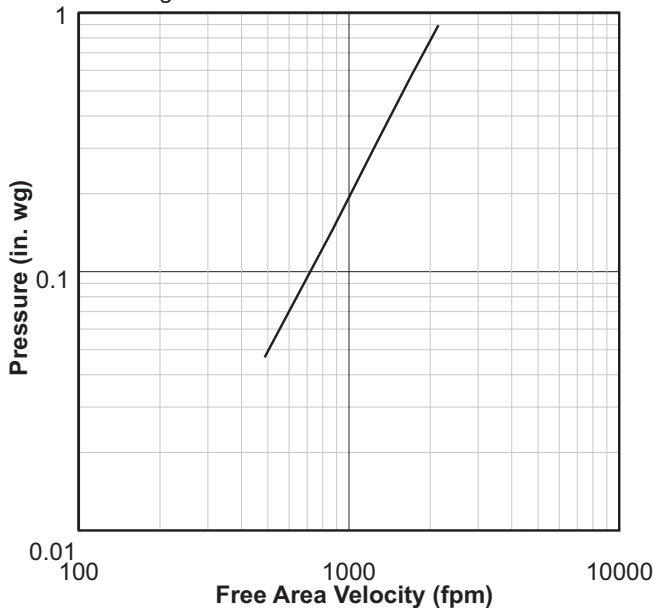

WATER PENETRATION

Standard Air - .075lbs per cubic foot
Test size - 48"x 48" for a 15 minute duration

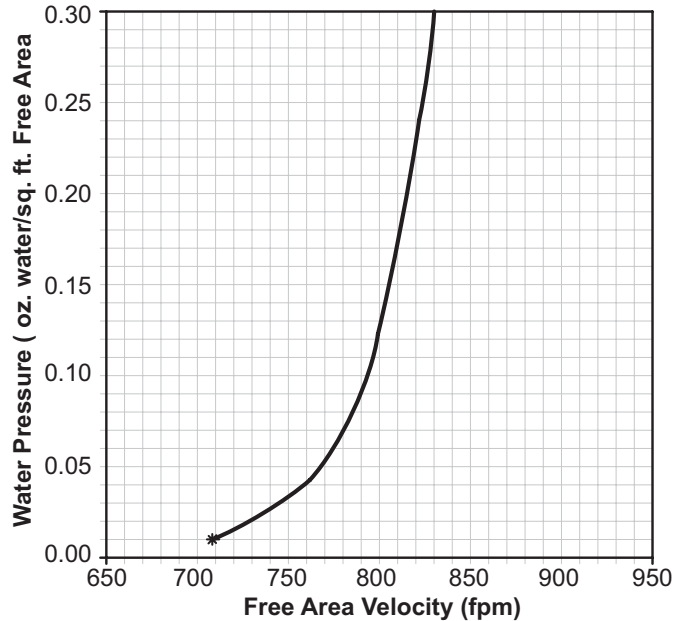

The beginning point of water penetration at .01 oz./sq. ft. is 709 fpm free area velocity.

JencoFan certifies that the Model GFL was tested according to AMCA Standard 500. These tests were performed under certain sets of laboratory conditions. These performance ratings do not guarantee that other environmental conditions may actually occur. Use safety factors when selecting louver sizes based upon performance.

Ship Schedules:
● Next Day Shipment From Stock

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL DFL

EXTRUDED ALUMINUM DRAINABLE BLADE FIXED LOUVER

The Model DFL offers excellent resistance to rain and weather. The drainable blade design channels water away from the blades and down the jambs. This eliminates water cascading from blade to blade. The channel frame is 4" deep with drainable 45 degree blades. This model is only available in extruded aluminum and comes standard with a birdscreen on the back.

Single panels sizes available: 18" W x 18" H to 48" W x 48" H.

FEATURES

Finish

- Mill

Frame

- 4" deep channel x .080 thick extruded aluminum

Blades

- Drainable style, .080 thick extruded aluminum, positioned at a 45 degree angle and spaced approximately 4" centers

Construction

- Screwed


Birdscreen

- 1/2" Flattened Aluminum in a removable frame mounted on the interior



MODEL DFL

EXTRUDED ALUMINUM DRAINABLE BLADE FIXED LOUVER

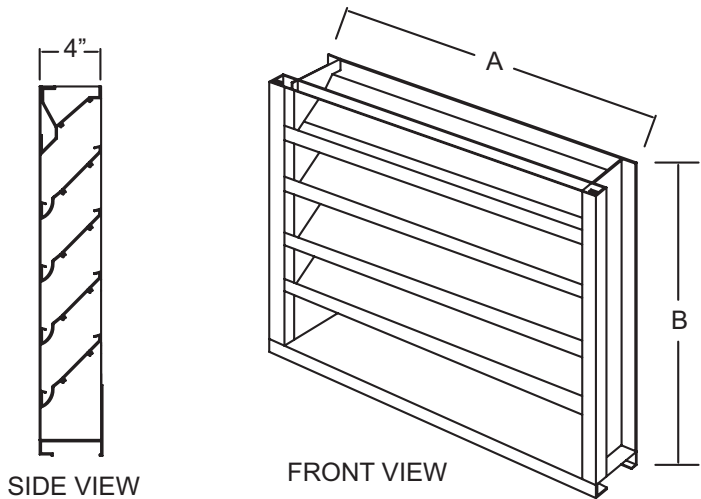

SIDE VIEW

FRONT VIEW

NOTE: Above "A" and "B" dimension are undersized 1/2" + or - normal tolerance of .0625


Part No.	Overall Frame Dimensions (W x H) in. inches	Free Area (Sq. ft.)	Est. Shipping Weight (lbs)
DFL18 ●	17.5 x 17.5	.89	10
DFL24 ●	23.5 x 23.5	1.88	14
DFL30 ●	29.5 x 29.5	2.93	22
DFL36 ●	35.5 x 35.5	4.58	28
DFL48 ●	47.5 x 47.5	8.48	47

Note: Estimated free area calculations are based upon AMCA standard 500-L, actual performance may vary.

Pressure Drop


Standard Air - .075lbs per cubic foot
Test size - 48"x 48" (Intake)

Ratings do not include the effect of a birdscreen

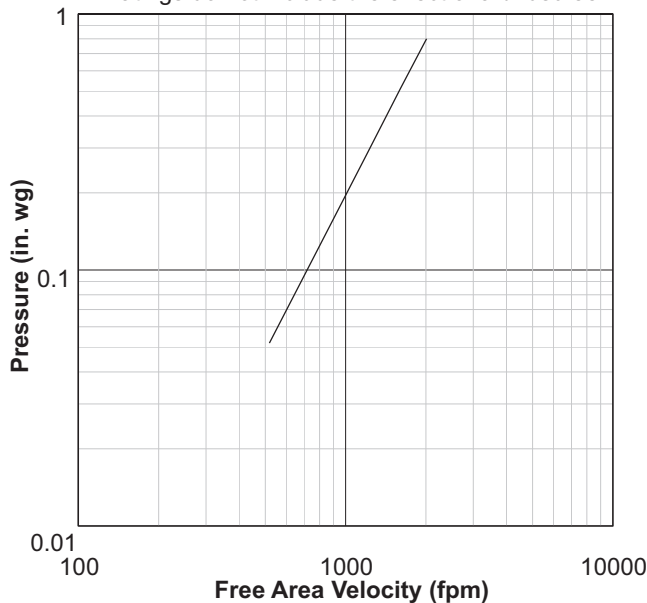

WATER PENETRATION

Standard Air - .075lbs per cubic foot
Test size - 48"x 48" for a 15 minute duration

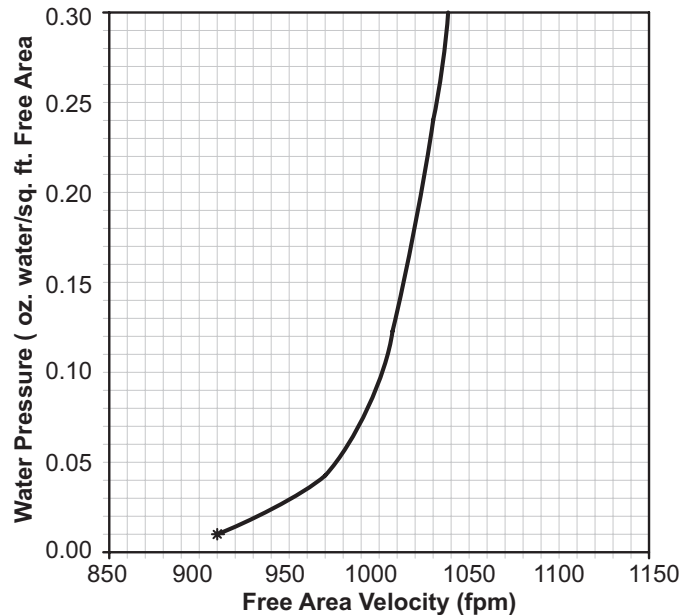

The beginning point of water penetration at .01 oz./sq. ft. is 910 fpm free area velocity.

JencoFan certifies that the Model DFL was tested according to AMCA Standard 500. These tests were performed under certain sets of laboratory conditions. These performance ratings do not guarantee that other environmental conditions may actually occur. Use safety factors when selecting louver sizes based upon performance.

Ship Schedules:
● Next Day Shipment From Stock

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

LOUVERS

MODEL ACL

EXTRUDED ALUMINUM COMBINATION LOUVER/DAMPER

The Model ACL offers superior resistance to rain and weather while also offering you the ability to completely close the opening off if needed. The channel frame is 4" deep with drainable 45 degree fixed blades in the front with adjustable blades with seals for tight shutoff in the back all within one frame. The adjustable rear blades are operated with a thumb screw. This model is only available in extruded aluminum and comes standard with a birdscreen on the interior.

Single panel sizes available: 18" W x 18" H to 48" W x 48" H.

FEATURES

Finish

- Mill

Frame

- 4" deep channel x .080 thick extruded aluminum

Blades

- Drainable style, .080 thick Extruded Aluminum, positioned at a 45 degree angle and spaced approximately 4" centers.

Construction

- Screwed

Birdscreen

- 1/2" Flattened Aluminum in a removable frame mounted on the interior

Seals



- Extruded TPV

Linkage

- On-blade type with a Thumb Screw Operator as standard


Options

The Model MTR-ACL is an optional 100-240 VAC 50/60 Hz power open spring return motor kit. The adjustable rear blades will return to the closed position in the event of loss of power. The motor kit comes pre-assembled for easy installation.

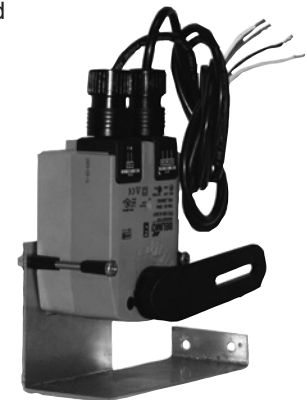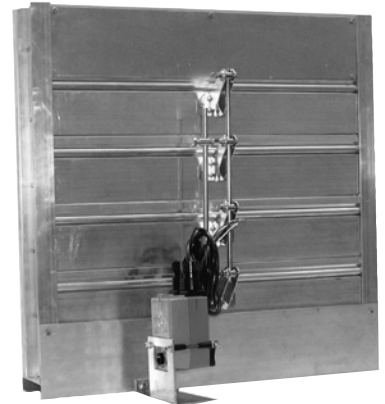

MODEL ACL

EXTRUDED ALUMINUM COMBINATION LOUVER/DAMPER

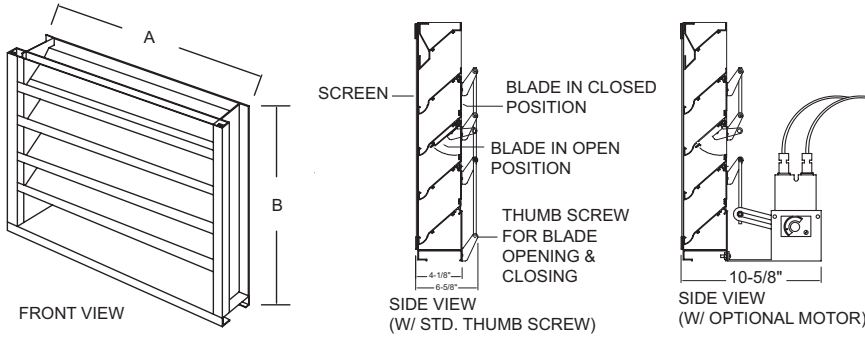

NOTE: Above "A" and "B" dimension are undersized 1/2" + or - normal tolerance of .0625

Part No.	Overall Frame Dimensions (W x H) in. inches	Free Area (Sq. ft.)	Est. Shipping Weight (lbs)
ACL18	17.5 x 17.5	.52	12
ACL24	23.5 x 23.5	1.35	21
ACL30	29.5 x 29.5	2.20	29
ACL36	35.5 x 35.5	3.67	38
ACL48	47.5 x 47.5	7.11	64


Note: Estimated free area calculations are based upon AMCA standard 500-L, actual performance may vary.

Pressure Drop

Standard Air - .075lbs per cubic foot

Test size - 48"x 48" (Intake)


Ratings do not include the effect of a birdscreen

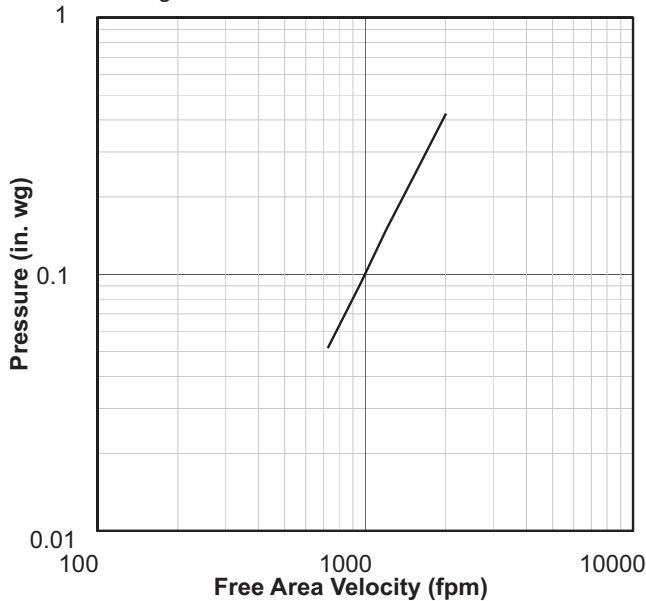

WATER PENETRATION

Standard Air - .075lbs per cubic foot

Test size - 48"x 48" for a 15 minute duration

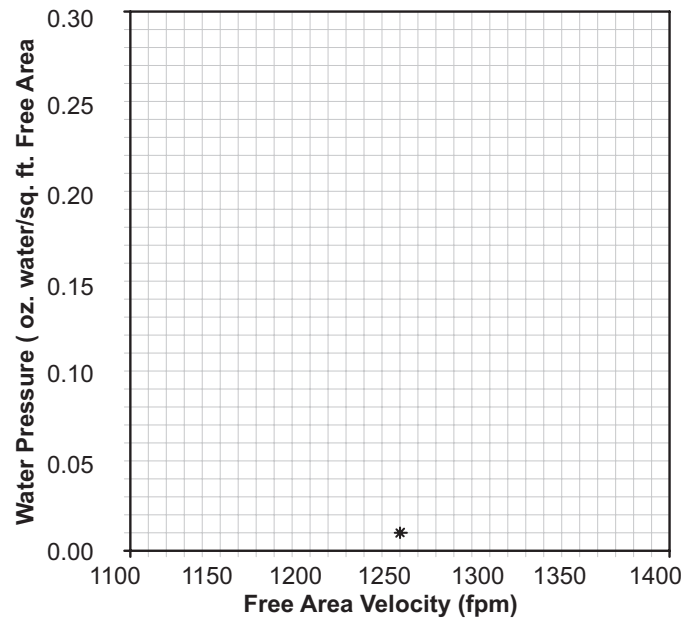

The beginning point of water penetration at .01 oz./sq. ft. is 1250 fpm free area velocity.

JencoFan certifies that the Model ACL was tested according to AMCA Standard 500. These tests were performed under certain sets of laboratory conditions. These performance ratings do not guarantee that other environmental conditions may actually occur. Use safety factors when selecting louver sizes based upon performance.

Ship Schedules:
◆ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL ADL

ALUMINUM DOOR LOUVER

Models ADL are heavy duty door louvers. The flanged frame has welded and/or staked mitered corners for added strength. The blades are inverted V style spaced on approximately 5/8" centers for maximum privacy. The louvers can be used for the transfer of air through any barrier and are ideal for use with 1-3/8" to 2-1/4" thick wood or metal doors. Available in Extruded Aluminum (ADL) comes standard with color matched #8 x 3/4" Phillips head mounting screws. The Model ADL comes standard with a 204-R1 Clear Anodized Finish.



FEATURES

Frame

- .040 thick extruded aluminum

Blades

- Inverted V style, .040 thick extruded aluminum, spaced approximately 5/8" centers

Construction


- Mitered and staked corners

Finish

- 204-R1 Clear Anodized

Fasteners

- #8 x 3/4" Phillips head screws

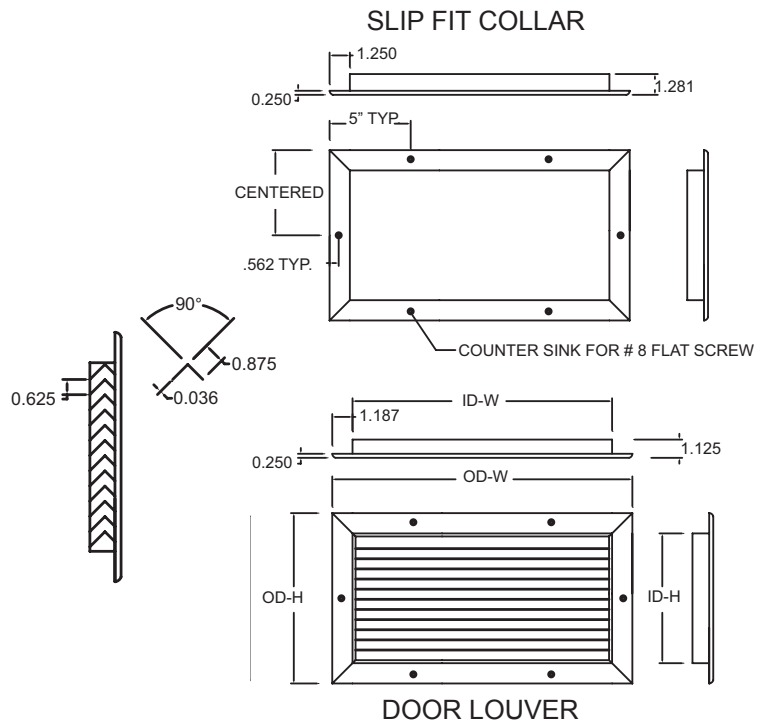

STANDARD SIZES

Dimensions in Inches

Part No.	Hole Opening		Actual OD		Est. Shipping Weight (lbs)
	W	H	W	H	
ADL10X4	10.5	4.5	12.25	6.125	2
ADL12X12	12.5	12.5	14.25	14.125	4
ADL16X8	16.5	8.5	18.25	10.125	3.5
ADL16X16	16.5	16.5	18.25	18.125	5
ADL20X10	20.5	10.5	22.25	12.125	4.5
ADL20X20	20.5	20.5	22.25	22.125	7
ADL24X12	24.5	12.5	26.25	14.125	5.5
ADL24X24	24.5	24.5	26.25	26.125	9

Ship Schedules:
◆ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

MODEL SDL

STEEL DOOR LOUVER

Models SDL are heavy duty door louvers. The flanged frame has welded and/or staked mitered corners for added strength. The blades are inverted V style spaced on approximately 5/8" centers for maximum privacy. The louvers can be used for the transfer of air through any barrier and are ideal for use with 1-3/8" to 2-1/4" thick wood or metal doors. Available Painted Steel (SDL) and comes standard with color matched #8 x 3/4" Phillips head mounting screws. The Model SDL comes standard with a Gray Primer Finish.



FEATURES

Frame

- 20 gauge cold rolled steel

Blades

- Inverted V style, 24 gauge cold rolled steel, spaced approximately 5/8" centers

Construction


- Mitered and welded corners

Finish

- Gray primer

Fasteners

- #8 x 3/4" Phillips head screws

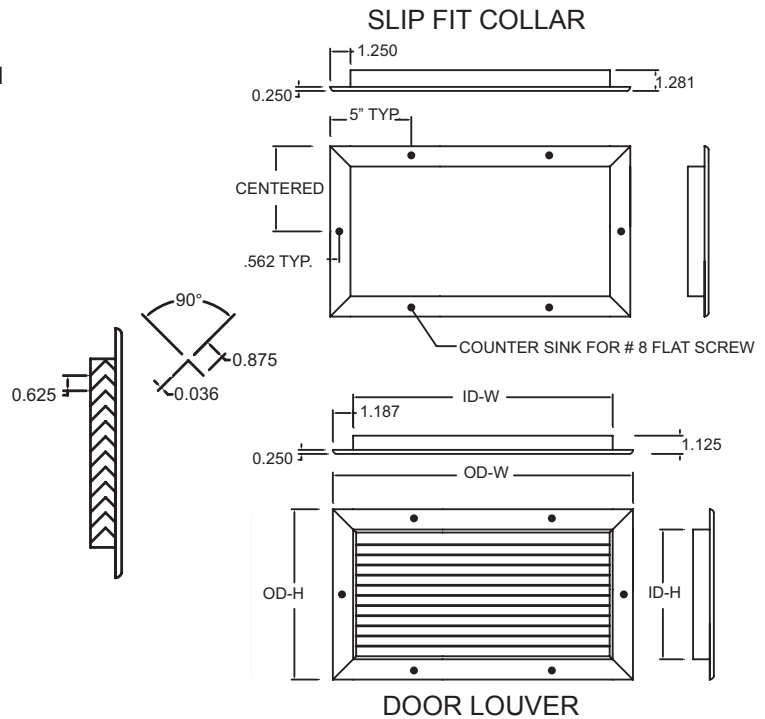

STANDARD SIZES

Dimensions in Inches

Part No.	Hole Opening		Actual OD		Est. Shipping Weight (lbs)
	W	H	W	H	
SDL10X4	10.5	4.5	12.25	6.125	3
SDL12X12	12.5	12.5	14.25	14.125	6
SDL16X8	16.5	8.5	18.25	10.125	5
SDL16X16	16.5	16.5	18.25	18.125	7.5
SDL20X10	20.5	10.5	22.25	12.125	6.5
SDL20X20	20.5	20.5	22.25	22.125	10.5
SDL24X12	24.5	12.5	26.25	14.125	8
SDL24X24	24.5	24.5	26.25	26.125	13.5

Ship Schedules:
◆ 10 Day Shipment

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

LOUVERS




ROOF VENTILATOR ACCESSORIES

PREFABRICATED ROOF CURB

Factory built curbs reduce installation time and assure proper fit of ventilator and curb.

STANDARD CANTED ROOF CURB FEATURES



- Continuously welded 18 gauge galvanized steel with integral base plate.
- 1 1/2 x 1 1/2 wood nailer.
- 1" semi-rigid insulation.
- Fully mitered 3" cant.
- Damper mounting flange (damper tray).
 - A = Curb OD, see specific ventilators for recommended size.
 - B = Curb height, 12" standard
 - C = Nailer width, 1 1/2" standard.

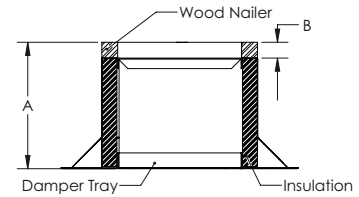

STANDARD CANTED ROOF CURB

RESTAURANT ROOF CURB STANDARD FEATURES

- Constructed of 18 ga. galv. steel with continuous welded seams and integral base plate for water tightness and extra strength.
- Wide base flashing to insure adequate bond to roofing surface for water tight seal to roof.
- Insulation not furnished when curb is equipped with special ventilation slots.
- Top of curb covered with 1/4" polystyrene gasket for weather seal and to reduce metal to metal conducted noise.
- Minimum curb height is 18" to comply with NFPA Bulletin 96

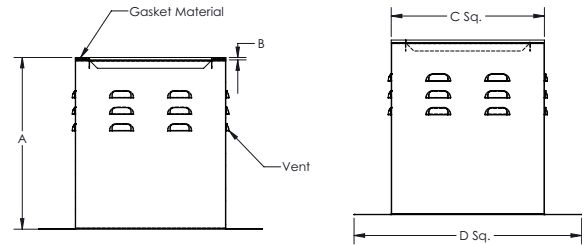

VENTED RESTAURANT ROOF CURB

STANDARD DUTY - BOX FRAME BACKDRAFT DAMPER

For exhaust ventilator models **SDB, DB, RED, LPD, STXD, STXB, TXB and ARE.**

For supply fan - refer to the flanged frame damper on the following page.

- Maximum face velocity - 1000 FPM.
- 19 gauge galvanized steel frame.
- 26 gauge aluminum blades.
- Stainless steel pivots.
- Felt seal between blades.
- Adjustable spring counter balance.
- Max 250°F ambient temp (130°F for motor).





Notes:

- (1) Units are undersized 1/4" to fit in square ducts or inside the roof curb.
- (2) Do not mount fan less than 1/3 diameter of the fan from the damper.
- (3) Dampers shipped in individual cartons.
- (4) Motor kits ship loose for field installation.

A = Damper OD, see specific ventilator for specific size.

DO NOT USE A DAMPER IN GREASE REMOVAL APPLICATIONS OR WITH A UL-762 LISTED EXHAUST FAN FOR KITCHEN VENTILATION

CAUTION: Motor kits are not suitable for use in explosive or flammable areas or airflows.

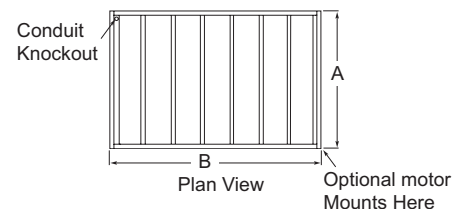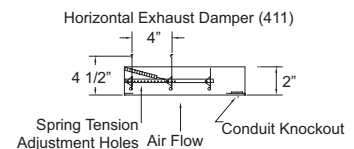

DUE TO CONTINUING RESEARCH, JencoFan RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

ROOF VENTILATOR ACCESSORIES, cont'd.

HEAVY-DUTY FLANGED FRAME BACKDRAFT DAMPER

For exhaust ventilator models **RCXII**.
 For supply ventilator models **KSF, ARE and RCXII**.


- Maximum face velocity - 3000 FPM.
- 20 gauge galvanized steel frame.
- .025 aluminum blades.
- 28 gauge galvanized steel blades for 7 1/2 HP ventilator models (XHD).
- Stainless steel axles.
- Galvanized steel tie bars, stainless steel pins.
- Extruded vinyl seals between blades, mechanically locked into blade.
- Spring assist kit supplied with XHD dampers.

- (1) Do not mount fan less than 1/3 diameter of fan from the shutter.
- (2) Motors are 115/208/230V.
- (3) Dampers shipped in individual cartons.
- (4) Motors and counterbalance kits ship separately.
- (5) Units for horizontal mounting with air flow down require counter balance kits (for gravity operation).
- (6) Multiple section assemblies may require bracing to support the weight of the assembly and to hold against system pressure. **BRACING SUPPLIED BY OTHERS.**
- (7) Multiple section dampers are factory joined (except 72" and larger).


CAUTION: Motor kits are not suitable for use in explosive or flammable areas or airflows.

A = Damper OD, see specific ventilator for recommended size.
 B = A + 2 1/2" (OD of damper flange)



NOTE: For supply applications with airflow vertically down, a counter balance weight kit is supplied for field installation.



Single panel damper for ventilator size 36 & smaller.



Two panel damper for ventilator size 42 & larger.

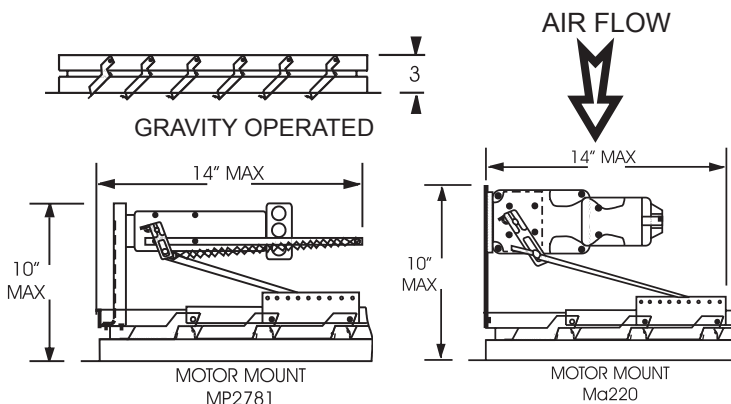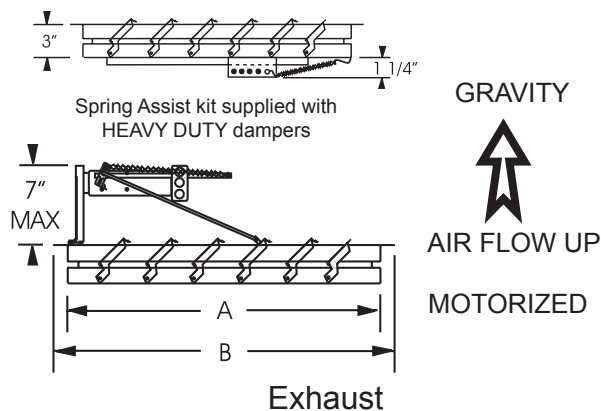

Supply

ACCESSORIES

SIDEWALL PROPELLER FAN ACCESSORIES

WALL SHUTTERS/DAMPERS

For fan models **GED, LCE**


- Maximum face velocity - 2500 FPM.
- .062 mill finish 6063T5 or T6 extruded aluminum frame.
- 26 gauge 3105 mill finish aluminum blades.
- Felt seal on leading edge of blade.

Notes:

- (1) Do not mount fan less than 12 inches from the shutter.
- (2) Motors are 115/208/230V.
- (3) Dampers shipped in individual cartons.
- (4) Motors ship separately.
- (3) Multiple section assemblies may require bracing to support the weight of the assembly and to hold against system pressure.
BRACING SUPPLIED BY OTHERS.
- (4) Multiple section dampers are factory jointed


CAUTION: Motor kits are not suitable for use in explosive or flammable areas or airflows.

A = Shutter size, see specific fan for recommended size.
B = A + 2 1/2" (OD of shutter flange)

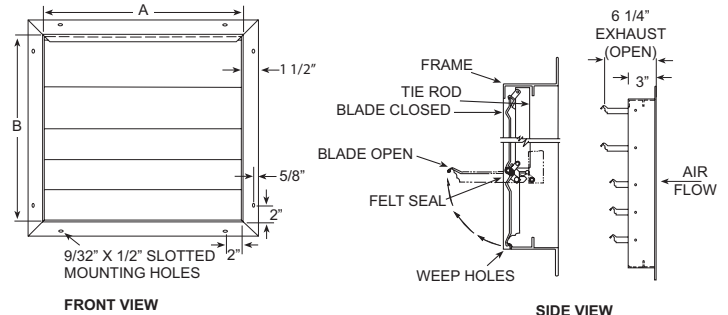

FRONT VIEW

SIDE VIEW
Note: Above dimensions + or - normal tolerance of .0625"

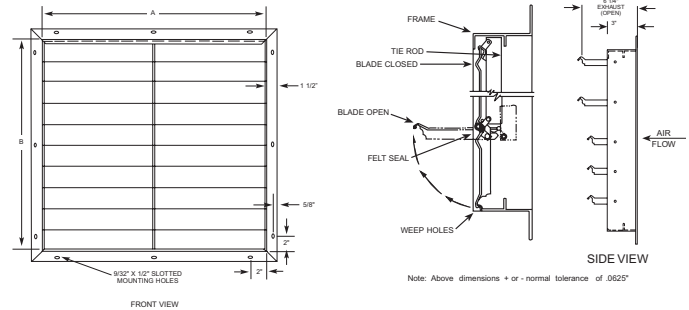

FRONT VIEW

SIDE VIEW
Note: Above dimensions + or - normal tolerance of .0625"

ACCESSORIES

For fan models **LCS**


- Maximum face velocity - 3000 FPM.
- 20 gauge galvanized steel frame.
- .025 aluminum blades.
- Extruded vinyl seals between blades mechanically locked into blade.

Notes:

- (1) Do not mount fan less than 12 inches from the shutter.
- (2) Motors are 115/208/230V.
- (3) Dampers shipped in individual cartons.
- (4) Motors ship separately.
- (3) Multiple section assemblies may require bracing to support the weight of the assembly and to hold against system pressure.
BRACING SUPPLIED BY OTHERS.
- (4) Multiple section dampers are factory jointed


CAUTION: Motor kits are not suitable for use in explosive or flammable areas or airflows.

A = Shutter size, see specific fan for recommended size.
B = A + 2 1/2" (OD of shutter flange)

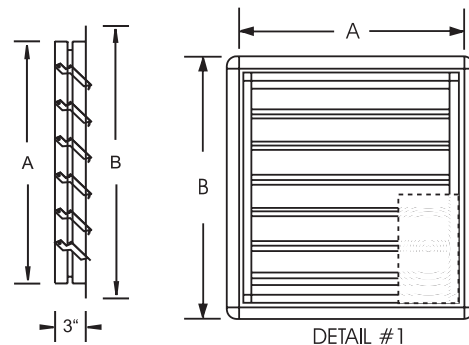

DETAIL #1

Single panel shutter for fan size 36 & smaller

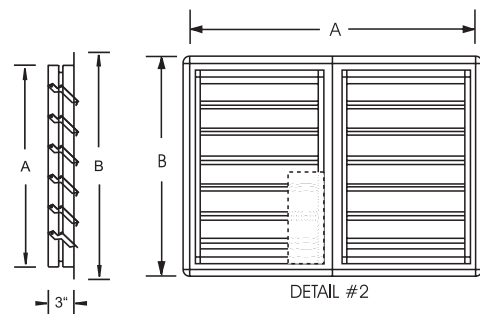

DETAIL #2

Two panel shutter for fan size 42 & larger

SIDEWALL PROPELLER FAN ACCESSORIES, cont'd

FAN - WALL HOUSING - SHUTTER - GUARD ASSEMBLY

Factory Assembled Package
For fan models LC

APPLICATION


This heavy-gauge, all galvanized G-90 steel housing provides a simple solution to installing a fan and all required accessories in a rough wall opening. It can be used in exhaust or supply applications. Depending on space and maintenance requirements, the wall housing may be installed inward or outwards of the building. All housings ship with the fan, shutter only on wall packs and guard assembled to lessen jobsite installation costs.

SIZE	A	B	C	D	E	MINIMUM WALL OPENING	EXHAUST	SUPPLY
							RAINHOOD 45 DEG	RAINHOOD 90 DEG.
							F	F
20	25	44	24	22 1/2	20	25 1/2	24 1/4	27 3/4
24	31		30	28 1/2	26	31 1/2	28 1/2	38 1/2
30	37		36	34 1/2	32	37 1/2	34 1/2	44 1/2
36	43		42	40 1/2	38	43 1/2	40 1/2	49
42	49		48	46 1/2	44	49 1/2	44 1/2	56 1/2
48	55		54	52 1/2	50	55 1/2	49 1/2	62 1/2
54	61		60	58 1/2	56	61 1/2	55	73
60	67		66	64 1/2	62	67 1/2	69	73


ALL DIMENSIONS IN INCHES.

Rainhoods, by others are required for all supply applications, and motorized shutters are strongly recommended.

EXHAUST ARRANGEMENT (TYPICAL)

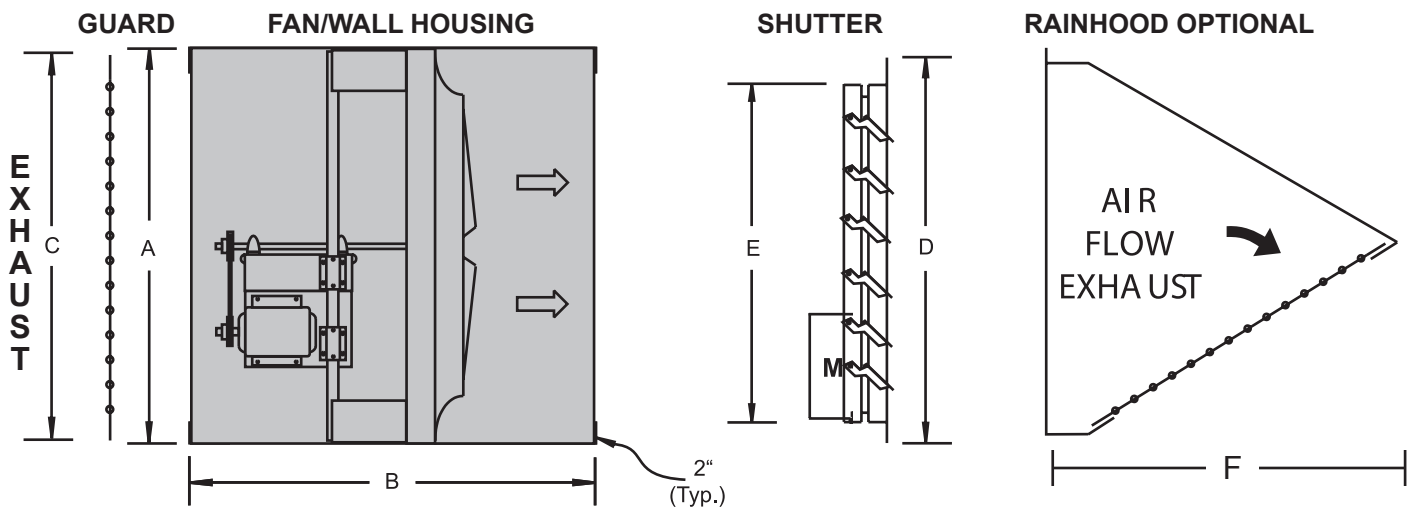

SUPPLY ARRANGEMENT (TYPICAL)

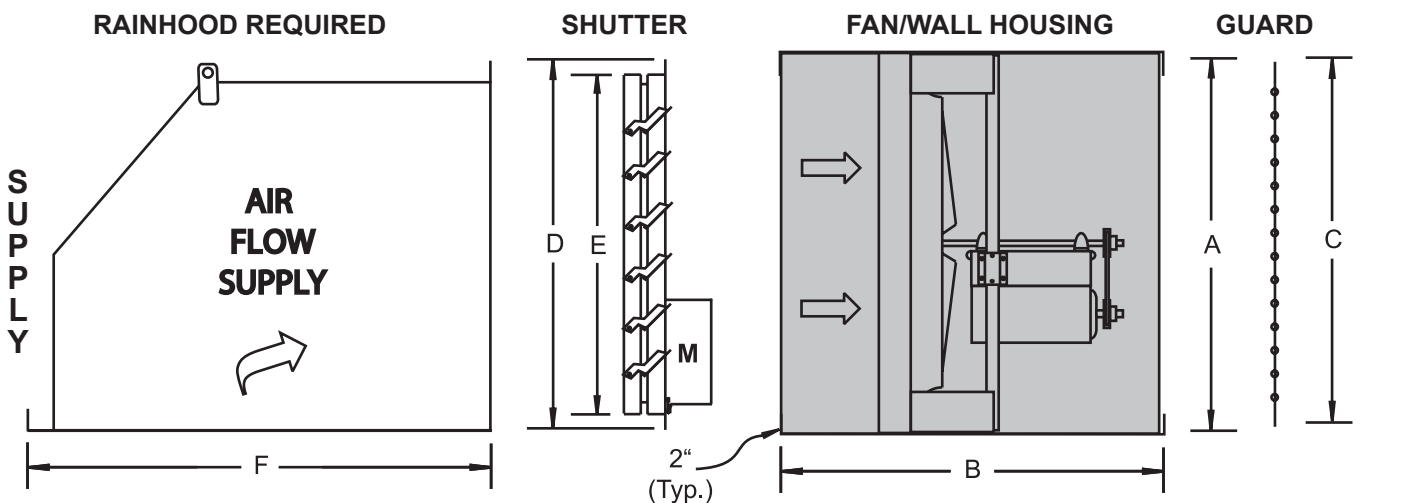

ACCESSORIES

Please refer to the General Catalog or contact the Factory for our Full Line of products available on standard shipping schedules.

Competitors Cross Reference Models

Models are for general similarity only. Refer to specifications and construction data for details

JencoFan	DESCRIPTION	ACME	CARNES	COOK	GREENHECK	PENN	TWIN CITY	COOLAIR	FANTECH	CAPTIVE AIRE
SDB	Power Roof Exhauster - Centrifugal - Belt Drive	PV/PNN	VEBK	ACEB	GB	DXB/KB/MB	BCRD	CRBCA	5BDD	DD-FA
DB	Power Roof Exhauster - Centrifugal - Belt Drive	PV/PNN	VEBK	ACEB	GB	DXB/KB/MB	BCRD	CRBCA	5BDD	DD-FA
LPD & RED	Power Roof Exhauster - Centrifugal - Direct Drive	PRN	VEDK	ACED	G	DX	CRDD	CRDA	5DDD	DR-HFA
STXB	Upblast Roof Exhauster - Centrif. - Belt Drive	PNU/PU/PUH	VUBK	ACRUB	CUBE	FXB/FMX	BCRU	UBCA	5BDU	NCA-FA
STXB (UL-762)	Upblast Restaurant Hood Exhauster - Belt Drive	PNU-RG	VRBK	VCR	CUBE	FXBFT/FMBFT	BCRUR	CUBA	5BDU-762	NCA-HPFA
TXB	Upblast Roof Exhauster - Centrif. - Belt Drive	PNU/PU/PUH	VUBK	ACRUB	CUBE	FXB/FMX	BCRU	UBCA	5BDU	NCA-FA
TXB (UL-762)	Upblast Restaurant Hood Exhauster - Belt Drive	PNU-RG	VRBK	VCR	CUBE	FXBFT/FMBFT	BCRUR	CUBA	5BDU-762	NCA-HPFA
STXD	Upblast Roof Exhauster - Centrif. - Direct Drive	PDU	VUDK	ACRUD	CUE	FX/FMX	DCRU	UDCA	5DDU	DU-HFA
CWD	Sidewall Centrifugal Exhaust-Direct Drive	PW	VWDK	ACWD	GW	WX/WA/WB	TCWX	CWDA	5DDW	-
FF/FFC	Bathroom Fans & Cabinet Fans	V/VQ	VCDD	GEMINI-GC/GN	SP/CSP	ZEPHYR-Z	T/TL	CF/CFL	-	CFA-CA
KSF	Filtered Fresh Air Supply Roof Fan	AFSI	VSBB	KSPB	KSU/RSF	MU	BCFS	CSF/SIS	5FSU	A-SERIES
ARE/ARS	Dome Axial Power Roof Exhaust/Supply	LQ	LEDA	AQD	AIS	DAE	-	SASD/SAED	5ADE/5ADS	DDAR-FA
GED	Sidewall Propeller Fan - Direct Drive	FQ/FN	LTDK/LZDK	APD/SWD	SE/SSI	P	TCPE	CDC	-	CEPRSM
LCE/LCS	Sidewall Propeller Fan - Belt Drive	DC/DCK	LWBA/LWBK	XML/SWB	SBE/S 1&2	BLL/BFM/BBK	WPMB	C-SERIES	1RHR/1RHS	-
SQB	Inline Duct Fan - Centrifugal - Belt Drive	XB	VIBK	SQN-B/SQI-B	BSQ	SXB	BST	SQBA	-	ISQB
SQD	Inline Duct Fan - Centrifugal - Direct Drive	XD	VIDK	SQN-D/SQI-D	SQ	SX	DSI	SQDA	-	-
RCXII	Non-powered Roof Vent - Round Dome	LQV	GSA	PR	GRS	DR	GRV	ARVE	-	-
CM	Belt Driven Utility Vent Set	QBR	VBRA/VFBA	CPRD/CPFB	SFD/SFB/SWD	D	BCV	-	-	-
CFD	Forward Curved Inline Duct Blower - Belt Drive	DM	-	DB	BDF	ZC	DBS	-	-	-

Also Available from JencoFan

Residential/Light Commercial

MODEL TD



Sizes 100 to 315
100 to 1,050 CFM
Static pressure to 1"
AMCA Seal for Air
cULus Listed
HVI Certified
ENERGY STAR® Qualified
In-Stock Availability

MODEL TD-SILENT



Sizes 100X to 200
100 to 530 CFM
Static pressure to 1"
cULus Listed
HVI Certified
ENERGY STAR® Qualified
In-Stock Availability

MODEL PV



Sizes 100 to 315
100 to 940 CFM
Static pressure to 1-1/2"
AMCA Seal for Air
cULus Listed
HVI Certified
ENERGY STAR® Qualified*
In-Stock Availability

MODEL SWF



Sizes 100 to 200
100 to 400 CFM
Static pressure to 1-1/2"
cULus Listed
HVI Certified
In-Stock Availability

* Only PV sizes 150x and larger are ENERGY STAR® Qualified.

MODEL TR (ERV)



Sizes 90 to 300
40 to 310 CFM
Static pressure to 1"
cULus Listed
HVI Certified
In-Stock Availability

MODEL PC



Sizes 50 to 150
50 to 150 CFM
Static pressure to 1"
DC Motor Option Available
HVI Certified
cETLus Listed
ENERGY STAR® Qualified
Lighted & Motion Sensor Grilles
In-Stock Availability

MODEL HR (HRV)



Sizes 100 to 220
30 to 220 CFM
HVI Certified
Top & Side Port Options
In-Stock Availability

Jen^{co}Fan

USA Division

6393 Powers Avenue
Jacksonville, FL 32217
P. 904-731-4711 · F. 904-737-8322
www.jencofan.com

Canada Division

5600 Ambler Drive
Mississauga, ON L4W 2K9 - Canada
P. 416-744-1217 · F. 416-744-0887
www.jencofan.com

Soler&Palau
Ventilation Group