
## **MODEL BGH INTAKE/RELIEF GRAVITY HOODS**



Jacksonville, Florida 32217-2298 P: 904.731.4711 / F: 904.737.8322 www.Jencofan.com



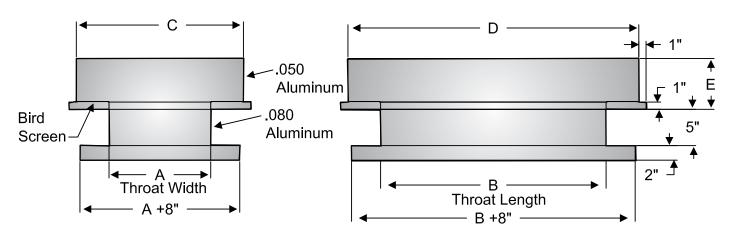

## STANDARD FEATURES

- All aluminum or steel construction with standard mill finish. **Hinged Hood** For easy access.
- · All curb base corners miter cut and continuous welded.
- · Hood reinforced and braced for extra strength.
- · Hood assembled with standing and snap back seams secured

with spot welds.

Hood perimeter opening area same as throat area.

Relief 1:1 ratio Intake 2:1 ratio

- Birdscreen of 1/2" x 1/2" mesh galvanized welded wire. NOT AVAILABLE W/ FILTERS
- · Hood has wide overhang for storm protection.

## **OPTIONS**

- Insulated Hood Rubberized anti-condensate under coating or 1" BAT type glass fiber.
- Filters Permanent type 1" or 2" thick cleanable aluminum
- Insect Screens Aluminum 18 mesh in perimeter opening.
- Aluminum Birdscreen Diamond shaped 1/2" x 1" flattened expanded aluminum .060" thick.
- · Storm Construction Extra heavy internal reinforceand bracing. ment
- · Decorative Coatings Industrial grade enamel in specified color.
- Protective Coatings Grey epoxy, eisenheiss, or heresite.

Line	Qty.	Model	Throat I.D. A x B	Hood Height. E	Overall Height F	O.D. Hood C x D	O.D. Curb Cap A + 8" & B + 8"	OPTIONS				Additional
								Auto BDD	Mtr BDD	Spec. Screens	Spec. Coat- ings	Specifica- tions
1												
2												
3												
4												
5												

Project:	Submitted:
Customer:	Approved:
Location:	