

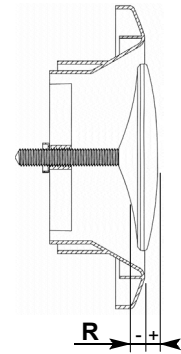


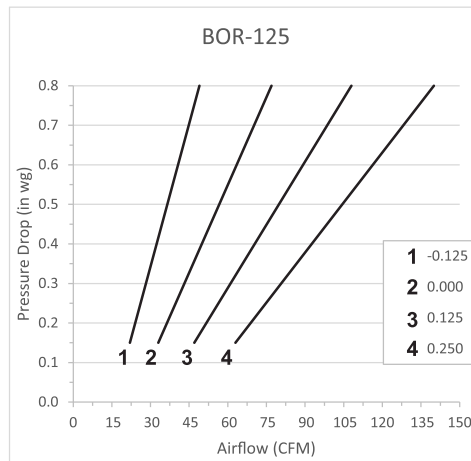





White polystyrene air exhaust/intake valves for dwelling and commercial applications. All models offer an adjustable central valve to regulate the airflow. They can be used in heating, air conditioning and ventilation systems.

### Dimensions (inches)

Model	Airflow (CFM)	ØD1	ØD2	H	ØA1	ØB1	H1
BOR-100	15 - 100	3-1/8	5-1/2	1/2	3-7/8	5-1/8	1-5/8
BOR-125	20 - 140	4-1/2	6-1/2	5/8	4-3/4	6-1/8	1-3/4
BOR-150	45 - 235	5-1/8	8	5/8	6-1/8	7-5/8	1-3/4
BOR-200	85 - 345	6-1/4	9-1/2	5/8	7-5/8	9-1/4	1-3/4

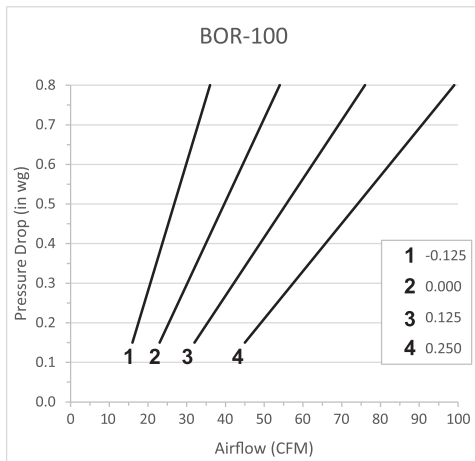

The above figure indicates the adjustment screw setting value in inches, (1-4 below).

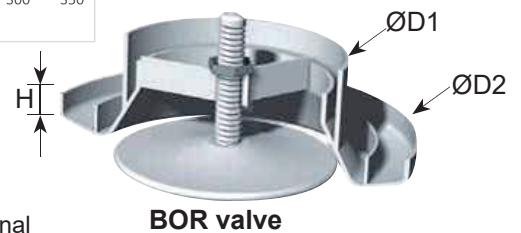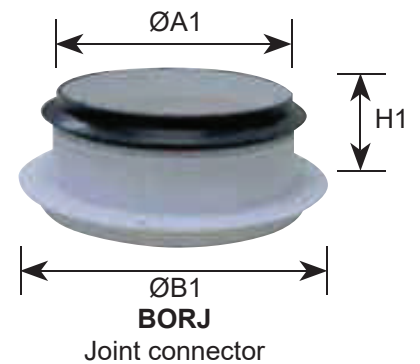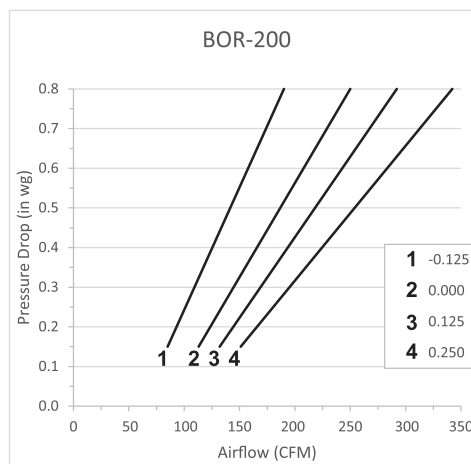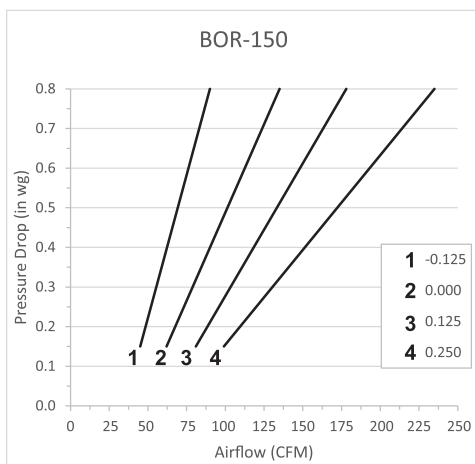

For more information contact us at [www.jencofan.com](http://www.jencofan.com) or 1.800.961.7370 for additional submittal drawings.

Jencofan will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.